
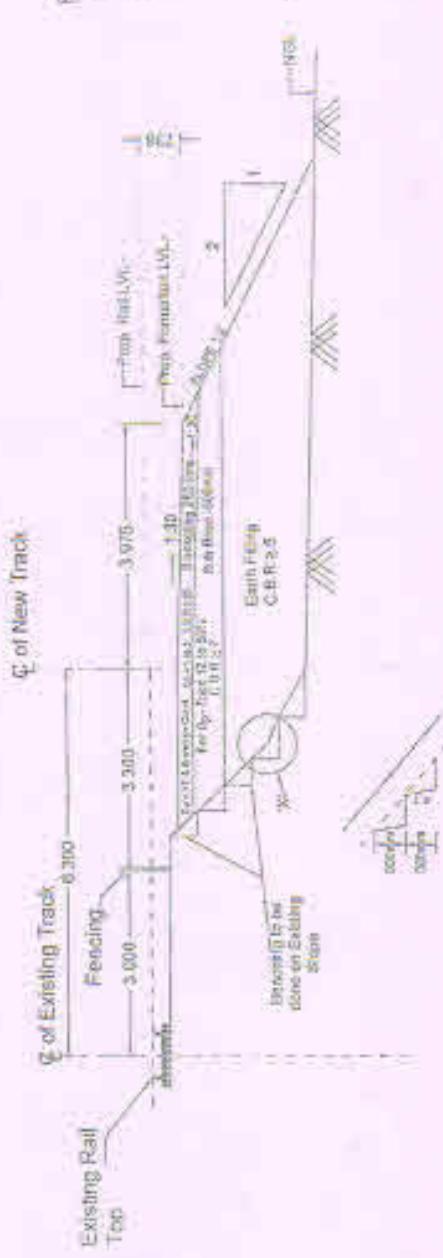


TYPICAL CROSS - SECTION FOR BSB - ALD DOUBLING



Remarks:-

1. Earth work is to be carried out in patches no-night of course.
2. Before starting of earth work, site manager, subgrade and chief engineer, bearing and construction committee of subgrade site breaking the surface (removing the vegetation and spreading of kankri trees at site to be done).
3. Specification of earth work is to be followed as per RDSO letter Ref ID: RDSO/EGS/2009/14 dated 19-10-2009 with basis: Indian Railways. Work concerned in this letter of dated 10-10-2010 is issued in G-1 & 2003 and GE-10 of 2009.
4. Fencing 500m above height about 5m. Fences is to be provided as per gauge stability analysis report.


 S K Ojha
 (JGM Project)


 Vilas Chandram
 (CPM/Vasanasi)