

**HIMACHAL PRADESH
PUBLIC WORKS DEPARTMENT**

No.PWC-WA-1-Forest case/Rajera (Bhaniya) Bailly/2018-19-

Dated:- 11/11/2019

To

The Divisional Forest Officer,
Chamba Forest Division
Chamba Distt Chamba.

Subject:-


Diversion of 2.37 Hectare for the construction of link road from Rajera (Bhaniya) Bailly Km 0/0 to 4/500 with the jurisdiction of Chamba, Forest Division Chamba Distt. Chamba H.P.

Reference: -

Nodal Officer-cum-APCCF(FCA) O/O Pr CCF HP (Hoff),
Shimla letter No. FT-48-3914/2019(FCA) dt 30/11/2019.

With reference to the Nodal office observation as referred above, the following observations have been attended and reply to the same is given as under:-

- Point No-1** As per the Gol instruction regarding the detail of village name/ code/population is enclosed herewith in the prescribed format..
- Point No-2** Revised CA site map/Toposheet/Sopft copy of KML is duly signed by undersigned and enclosed herewith.
- Point No-3** The cost of estimates for reclaiming the dumping site is duly signed by undersigned and same is enclosed herewith.

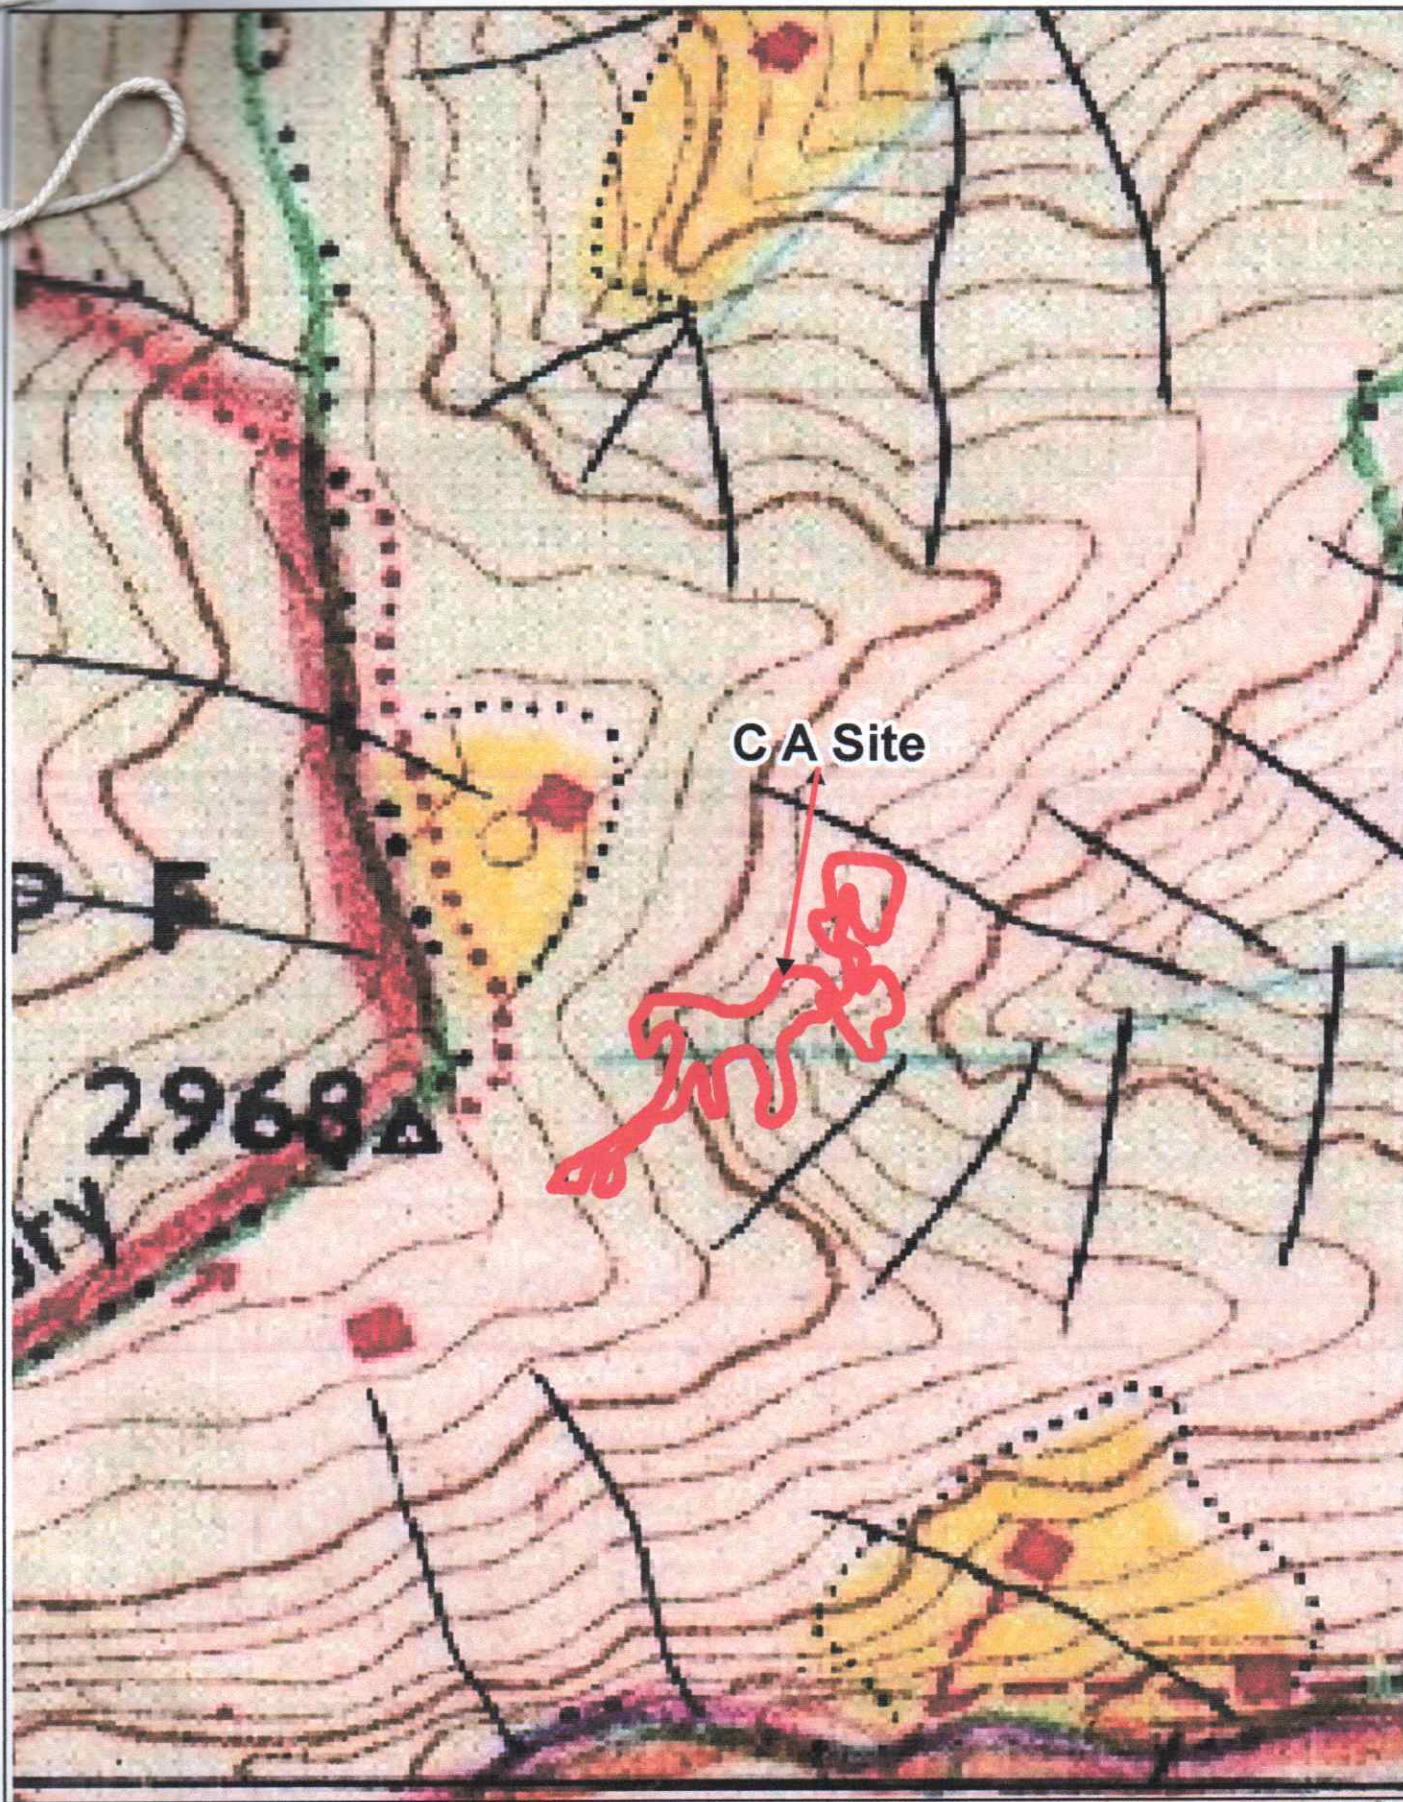

**Executive Engineer,
Chamba Division,
HP:PWD., Chamba**

Copy to the Nodal Officer-cum-Addl. Pr. CCF (FCA), o/o Pr.CCF HP Shimla-1 for kind information with referred to letter above please.

Copy to the Chief Conservator of Forests Chamba Forest Circle, Chamba District Chamba for information and necessary action.

Copy to the Assistant Engineer, Chamba Sub Division No-II HPPWD Chamba for information and immediate necessary action.


**Executive Engineer,
Chamba Division,
HP:PWD., Chamba**



Index

Assistant Engineer
Chamra Sub Division

Executive Engineer

Scale

1.50000'

Digital Landuse Map for Proposed C A Site C/O Link Road Rajera [Bhanja] Bailly KM 00 to 4/500.




- Legend**
- Proposed Site
 - Forest Land
 - Open Land

Executive Engineer
Chamba Division
H.P.P.W.D. Chamba

Assistant Engineer
Chamba Sub-Division No.-II
H.P.P.W.D. Chamba (H.P.)

**DETAIL OF VILLAGES FALLS IN RAJERA (BHANIA) BAILLY ROAD
KM. 0/0 TO 4/500**

S.No	Name of the village	Village code	Population
1	Bailly	00114800	269


Assistant Engineer,
Chamba Sub Division, No.II
HP:PWD Chamba



Executive Engineer.
Chamba Division,
HP:PWD Chamba


"ABSTRACT OF COST"

Name of work :- Construction of motorable Link road from Rajera (Bhaniya) Bailly KM. 0/0 to 4/500

(SH:- CONSTRUCTION OF WIRE CRATES)


S.No	Item	Qty	Rate	Unit	Amount
1	Earthwork in excavation for structures as per drawing and technical specifications clauses 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable materials Ordinary soil Upto 3 m depth	390.63	128.15	Per cubic metre	50059.00
2	Providing and laying of boulder apron laid in wire crates with 4 mm dia GI wire conforming to IS:280 and IS:4826 in 100 mm x 100 mm mesh (woven diagonally) including 10 per cent extra for laps and joints laid with stone boulders weighing not less than 25 kg each as per drawing and technical specifications Clause 1301	1562.50	1458.40	Per cubic metre	2278750.00
Total					2328809.00


 Assistant Engineer,
 Chamba Sub Division, No.II
 HP.PWD. Chamba


 Executive Engineer,
 Chamba Division,
 HP.PWD Chamba

DETAIL OF MEASUREMENT**Name of work :- Construction of motorable Link road from Rajera (Bhaniya) Bailly KM. 0/0 to 4/500****(SH:- CONSTRUCTION OF WIRE CRATES)**

S.No	Item	Dumping site	LxBxH	Quantity
1	Earthwork in excavation for structures as per drawing and technical specifications clauses 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with	DS-I	110x1/2x1.25x1.25	85.94
		DS-II	110x1/2x1.25x1.25	85.94
		DS-II	110x1/2x1.25x1.25	218.75
			Total	390.63
2	Providing and laying of boulder apron laid in wire crates with 4 mm dia GI wire conforming to IS:280 and IS:4826 in 100 mm x 100 mm mesh (woven diagonally) including 10 per cent extra for laps and joints laid with stone boulders weighing not less than 25 kg each as per drawing and technical specifications Clause 1301	DS-I	2x110x1.25x1.25	343.75
		DS-II	2x110x1.25x1.25	343.75
		DS-III	2x280x1.25x1.25	875.00
			Total	1562.50


Assistant Engineer,
Chamba Sub Division, No. II
HP.PWD., Chamba