



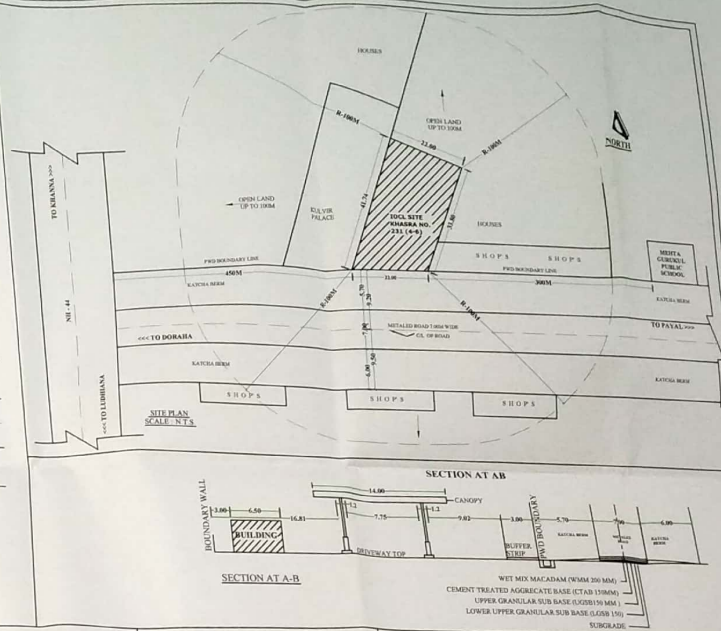


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

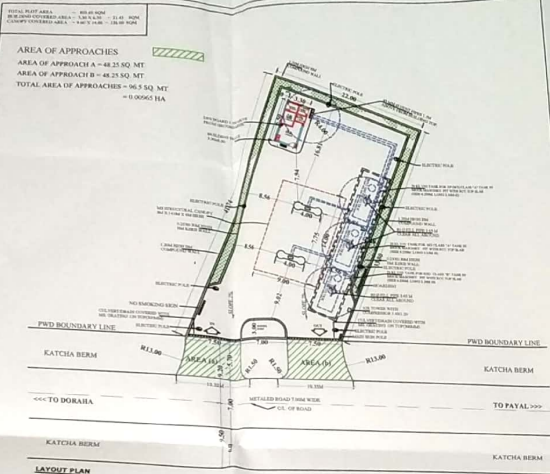

| TANK | SIZE OF TANK         | MS PLATES | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX |
|------|----------------------|-----------|---------|---------|---------|---------|---------|---------|---------|
| NO.  | SIZE                 | WET MIX   | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX |
| 1    | 2.5 M X 2.5 M (LONG) | WET MIX   | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX | WET MIX |

| LOCATION | PLAT NO. | POLICE STATION | RAILWAY STN | STATION | STATION | STATION | STATION | STATION | STATION |
|----------|----------|----------------|-------------|---------|---------|---------|---------|---------|---------|
| DORAH    | 211(44)  | DORAH          | DORAH       | DORAH   | DORAH   | DORAH   | DORAH   | DORAH   | DORAH   |

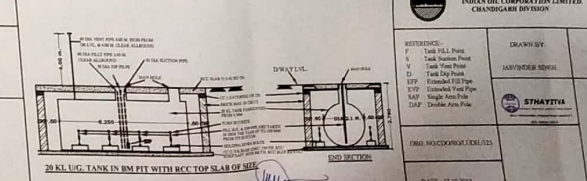

DATE: 17.10.2019

- GENERAL NOTES**
- NO ROAD CROSSING WITHIN 30.00 M ON EITHER SIDE OF THE PLOT.
  - NO GRADE REVERSE OR STRUCTURE WITHIN 1.50 M FROM THE UNDERGROUND TANKS.
  - SECTION FILL & VENT PIPES UNDER THE DRIVEWAY TO BE ROUNDED UNDER PIPE SLEEVES.
  - VENT PIPES 4.00 M DIA. 1.50 M DIA. FROM THE GROUND LEVEL AND 4.00 M CLEAR ALONGSIDE WITHIN THE PLOT FILLED WITH INVERTED U-TYPE VENT (DOUD) COVERED WITH INSULATION OF NON-COMBUSTIBLE MATTER WITH GAUGE OF 11 MESH FOR LINEAR CENTERMETER AT ITS OPEN ENDS.
  - DO NOT BRIDGE TANKS ON THE WALL OF SEALING ROOM 1.50 M FROM ITS FLOOR LEVEL AND SHALL NOT BE KEPT UNDER LOCK AND KEY.
  - FILL PIPES ARE KEPT 1.50 M CLEAR ALONGSIDE.
  - 2.00 M DIA. TYPE FOR EXTENDING DISCHARGE OF CAPACITY 1.00 M FOR EACH DISPENSING PUMP 2 NO. CO2 TYPE FIRE EXTINGUISHERS OF CAPACITY 4.50 KG EACH FOR ELECTRICAL FIRE & NON BUCKET BUCKET OF 10 LITERS EACH FILLED WITH DRY SAND SHALL BE PROVIDED AT THE PUMP.
  - TANKS FILL BY TANK LIBERTY.
  - WHEN THE TANKS SHALL NOT BE SUPPLEMENTED AT THE SAME TIME.
  - FILL PIPES AND VENT PIPES ARE FITTED WITH LOCKING ARRANGEMENT.
  - WET MIX FILLING OVER 10.00 M DIA.
  - ELECTRIC FITTING TO CONFORM TO ISIRI 300 (600V) FOR DISPENSING PUMPS ONLY.
  - UNDERGROUND TANKS SHALL BE PROVIDED WITH 11 M DIA. UNDER CANOPY.

- SPECIFICATIONS**
- CERTIFIED THAT UNDERGROUND TANKS SHALL BE FABRICATED AND INSTALLED AS APPROVED BY CODE RAUPUR, VIDE LETTER NO. P-4 (1) 51 DATED 23.01.87.
- NOTES**
- CERTIFIED THAT THIS IS A NEW KEROSENE & NOT BENTONITE CASE.
  - CERTIFIED THAT ALL THE CLEARANCES APPROVED FROM MCB & C&E SHALL BE OBTAINED.
  - CERTIFIED THAT ALL CANOPY SHALL CONFORM TO ISIRI 300 (600V) SPEC. AND THERE IS NO CHANGE OF ITS EVER CANOPY IN UNDER NORMAL CIRCUMSTANCES.
  - CERTIFIED THAT ALL FACILITIES AS SHOWN IN THE DRAWING SHALL BE INSTALLED/PROVIDED AT ABOVE LOCATION.
  - ALL DIMENSIONS IN METERS UNLESS OTHERWISE SPECIFIED.

DATE: 17.10.2019

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

**LAYOUT PLAN**  
**SCALE-200**

