


**Map showing the Safety Zone area 7.50 Mtrs inside the Mining area of M/s Sri Sai Rocks in
Compt.No.103, Boyakonda RF, Punganur Range, Chittoor West Division**



Scale : 1:4000

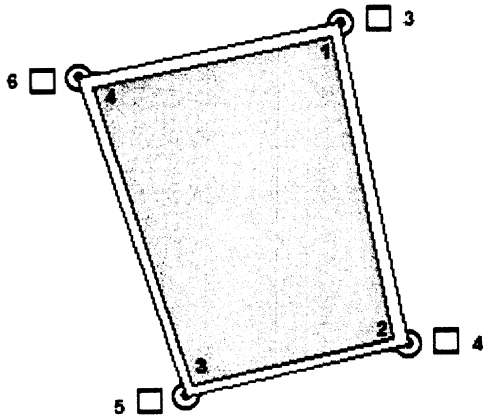

Datum : WGS-84

Co-ordinates for Mining area

St.No.	Lat	Long
3	13.47451	78.56644
4	13.47246	78.56688
5	13.47212	78.56545
6	13.47416	78.56476

Co-ordinates for Safety Zone area

St.No.	Lat	Long
1	13.47442	78.56638
2	13.47250	78.56679
3	13.47220	78.56549
4	13.47410	78.56485

Field Book of Safety Zone area

St.No.	Bearings in degree	Distance in links	Distance in Mtrs	Avg distance in Mtrs	Width in Mtrs	Area in Ha
3-4	168	1160	232	232	7.50	0.174
4-5	268	800	160	145	7.50	0.110
5-6	342	1195	239	239	7.50	0.179
6-3	81	930	186	171	7.50	0.128
Total : 817 Mtrs						Total : 0.591 Ha or 0.600 Ha

INDEX

- Safety Zone area : 0.60 Ha**
Surveyed stations
Cement Pillars

SRI SAI ROCKS

PROPRIETOR

K. Sreevaran FBO

Chinnakula Pale Bear


**FOREST RANGE OFFICER
PUNANUR**

**Sub-Divisional Forest Office Counter Signed
MADANAPATIL**

**Divisional Forest Officer
Chittoor West Divn., Chittoor.**

**FENCING AND REGENERATION OF SAFETY ZONE AREA AND AFFORESTATION IN LIEU OF SAFETY ZONE AREA
(ENRICHMENT PLANTATION) OF M/S SRI SAI ROCKS GRANITES , IN BOYAKONDA RF OF CHITTOOR WEST DIVISION, CHITTOOR.**

ABSTRACT CUM YEAR WISE ACTION PLAN																				
Sl No	Name of the work	Unit Cost			2017-18		2018-19		2019-20		2020-21		2021-22		2022-23		2023-24		Total	
		Unit	Rate	Rate with 10% escalation	Phy	Fin	Phy	Fin	Phy	Fin	Phy	Fin	Phy	Fin	Phy	Fin	Phy	Fin	Phy	Fin
1	2	3	4	5			6	7	8	9	10	11	12	13	14	15	16	17	18	19
I	Fencing - Safety zone area																			
1	Fencing of Safety zone area of 0.60 ha (7.5 mt width all around the mining area 817 rmt x 1.5 mt = 1226 sq.mts.)	Rmt	875	962.5	817	7.864													817	7.86
II	Regeneration - Safety Zone area																			
2	Regeneration of works in the safety zone area of 0.80 ha	LS/Ha	76200.00	83820	0.6	0.503													0.6	0.50
III	Afforestation in lieu of Safety zone area (Enrichment plantation)																			
3	Afforestation in lieu of safety zone area (enrichment plantation) over 0.60 ha (1 1/2 times 0.90 ha) by labour intensive method in degraded forest area																			
A	NURSERY																			
1	Raising of Nursery of tall plants/ purchase of tall plants	Nos	42.26	46.486	1000	0.46														0.46
B	ADVANCE OPERATIONS :																			
1	Advance operations	Ha	33500.95	36851.045	0.9	0.332													0.9	0.33
C	Raising																			
1	Raising Plantation	Ha	26100.00	31320			0.9	0.282											0.9	0.28
2	1st year Maint.	Ha	18000.00	23400					0.9	0.211									0.9	0.21
3	2nd year Maint.	Ha	18000.00	25200							0.9	0.302							0.9	0.30
4	3rd year Maint.	Ha	8500.00	12750									0.9	0.153					0.9	0.15
5	4th year Maint.	Ha	8500.00	13600											0.9	0.163			0.9	0.16
6	5th year Maint.	Ha	8500.00	14450													0.9	0.173	0.9	0.17
8	Over Heads					0.3000		0.300		0.250		0.200		0.090		0.050		0.050		1.24
	TOTAL :				0.9	9.463	0.9	0.582	0.9	0.461	0.9	0.502	0.9	0.243	0.9	0.213	0.9	0.223	0.9	11.68

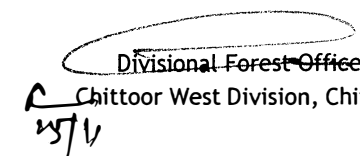
 Divisional Forest Officer,
 Chittoor West Division, Chittoor.