कार्यपालक अभियांता का कार्यालय राष्ट्रीय उच्च पथ प्रमंडल, पथ निर्माण विभाग, भागलपुर।

e-mail Id-eenhbhagalpurl@gmail.com

भागलपुर

कार्यपालक अभियंता, राष्ट्रीय उच्च पथ प्रमंडल, पथ निर्माण विभाग, भागलपुर।

सेवा में,

वन प्रमंडल पदाधिकारी, भागलपुर।

मुंगेर एवं भागलपुर जिलान्तर्गत NH-80 मुंगेर-बरियारपुर-सुलतानगंज-दोगच्छी विषय:-(कि0मी0 70.150 से 121.025) पथांश के चौड़े। करण एवं सुदृढ़ीकरण कार्य के संबंध

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि विषयांकित पथांश में कि0मी0 93.000 (घोरघट) से 121.025 (दोगच्छी) तक भागलपुर जिलान्तर्गत ाता है। इस पथांश में 400 cm से ज्यादा Girth वाले वृक्षों की संख्या पथ के बाये तरफ 26 एवं दाये तरफ 14 कुल 40 वृक्ष है। दिनांक 11.10.2022 को भवदीय कार्यालय में हुए बैठक में निर्देश दिया गया था कि 400 cm से 1816 ज्यादा Girth वाले वृक्ष को Construction के दौरान बचाने की कोशिश करना है। कुछ वृक्ष वर्तमान 15/11/2 खड़क के काफी करीब है जिसे चौड़ीकरण के दौरान पातित होने के बचाना संभव नहीं है। कुछ वृक्ष वर्त्तमान पथ के किनारे से लगभग 4-6 मीटर की दूरी पर है। जिसे Construction के दौरान पातित होने से बचाया जा सकता है। बचाये जाने वाले वृक्ष बायी तरफ 138-L, 169-L, 977-L, 1197-L एवं दायी तरफ 425-R, 510-R, 643-R, 797-R, 938-R है।

दिनांक 11.10.2022 को भवदीय कार्यालय में हुए बैठक में 60 cm से कम Girth CA वाले सहजन के पेड़ को स्थानान्तरित करने का निर्देश दिशा गया जिसके हिसाब से वृक्षों की सूची को संशोधित करने के उपरान्त पातित वृक्षों की संख्या 2006 एवं प्रतिस्थापित वृक्षों की संख्या अ897 है। जिसे पत्र के साथ संलग्न कर अग्रतर कार्रवाई करने हेतु समर्पित किया जाता है।

अन्0-यथोक्त।

विश्वासभाजन

राठ्य ७५० प्रमंडल, प०नि०वि०, भागलपुर।

stract of tree Counting in NH-80 From Km 93.000(Ghorghat) to Km 121.025(Dogacchi)

S.No	Particulars	Tree in LHS		- DUC	Total no. of Trees
1	Cutting	10	78	928	2006
	Translocation	9	50	947	1897
2		20)28	1875	3903
3	Total no of Trees	20			

Juli 2022 A.E. Executive Engineer

Carried Art

आर्थियालक क्षित्रिश्च का कार्यालम राष्ट्रीय उरूप पथ प्रमेश्च, पथ निर्माण विमाण क्रमीस्था

E Mail-eenhlakhisangial mynger 10 gmail. Com Mob. 210-947000131

समाक 690(अभा

Faris 20-10-2027

BUS:-

कार्डपालक अभियन्ता ् राष्ट्रीय ात पथ प्रमण्डल लखीसराय, मुंठ-मुगेर

अन्य मार्थ पराष्ट्राकारी निम्मार्थ पराष्ट्राकारी

पिवार: - कुंगर को आगलप जिल्लाकाई NH-80 कुंगर वरिमार्प पर तत्व के किसी - नारीकला कं खड़िक्ल हेंड जन (कंट्सन) अहिला के किसी - नारीकला कं खड़िक्ल हेंड जन (कंट्सन) अहिला के देवंश में।

- जिंग: - अवहीय प्रांच 1458 हिलांड 17-09-2022

7181217

के निमल्या हेड प्रन्ट महत्वमहीocation plan, translocation की मि Arborin हाटा निम्मित काल्याल पर कानुआवण तथा रंगांकण आर्थ शादिमालाईन इटमारि स्विवरणों संतान कर काल्या कार्य कार्य हों है

वाउठ यशील

कार्यपालक अभियन्ता राष्ट्रीय ज्या पथ प्रमण्डल लखीशराय, मृत-स्गेर २०/१०/ २०१२

त्यात्रियालक अतिहारा का त्यात्रीलम् कार्टीम अडल तमा त्रा राश हामान रिमाण करमेखान मुक्तमालम् होकोट

E Mail-eenhlakhisaneilat munger 1 @ gmail. com Mob. No.

सिर्धाक हिन्द्रिक्श

fz-113 20-10-2027

342:-

कार्यपालक अगियन्ता राष्ट्रीय एका पथ प्रमण्डल लखीराराय, गुं०-मुंगेर

रोता कें

पन अभेडल पराविकारी वान प्रभेडल हो जोर

रितिला :- क्रेंग्रेंट रिं आगलिय किलाफ्रार माम- 80 क्रेंग्रेंट विमालि -रेंडिक मान्यां का ड्या कार्टी (मुक्शी में 120 के 151.032) drie के कि मी - चौरीकल ल प्रहिंदिकाण हेंड लान (कंद्राम) आहितिया 1980के १६१ ३त. अर हु० ग्रीम क्षात्रमान मध्ये तर हत्व के दवहा में।

अक्ता:- अलहीप नभेड 1458 दिलोंड 17-09-9022

2181217

जिन्थेक निष्मक ग्रांगिष पम के दंदर्भ में भी गई चटलक of formation ets Tree translocation plan, translocation of All Arborist हारा निमित्त काल्यराल पर अनुअवण तथा रंचीपण लामि टार्रमलाईन इटमारिल्सित्वणी रंजिन कर कालभाउं काग्र र कार्मवार है KING2/

अनुर यथील

र्वक्यात आवर कार्यपालक अभियन्ता राष्ट्रीय एका पथ प्रमण्डल लक्षीसराय, गुं०-मुंगेर 20/10/2022

ofe

TRANSLOCATION OF TREES PLAN

MUNGER TO BHAGALPUR, FROM KM 70.150 TO 121.025 OF NH-80

For Munger Div. From km 70.150 to km 93.000 part of project

Contents

- 1. Introduction
- 2. Tree Protection Plan
- 3. Methodology of Tree Translocation
- 4. List of felling / Translocation of trees.
- 5. Calculation Table of Tree Translocation within ROW.

1. INTRODUCTION:

The Authority has awarded the project "Rehabilitation & Widening work for 2 – Lane with paved shoulder of existing National Highway 80 Alignment from KM 70.150 to Km 121.025 Munger – Sultanganj - Bhagalpur section in the state of Bihar" to the EPC Contractor.

This report explains Avenue Tree Translocation Planning & its Estimate for Munger – Bariarpur from km 70.150 to 93.000 which is part of above project.

For this purpose the total 1185 number of trees are found within proposed toe line of the project highway. Out of that 804 no. of trees are proposed for Translocation and 381 no. of trees are proposed for felling.

To counterbalance the loss of trees and other changes resulted into the surroundings; there is a need to follow the approach of "Corridor Development & Management", rather than "Highway Development". Apart from mitigating the environmental losses, it must plan to enhance the aesthetics of the highway corridor from all possible angles. Highways should not be looked upon merely as a means of transportation, but as a part and parcel of the environmental and socio-economic milieu.



2. Translocated Tree Protection Plan

Project Name: Rehabilitation & Widening work for 2 – Lane with paved shoulder of existing National Highway - 80 Alignment from KM 70.150 to Km 121.025 Munger – Sultanganj - Bhagalpur section in the state of Bihar.

Brief Information about the Project:-

The Government of Bihar has decided to take up the development of various road stretches/Corridors in the various parts of the State to upgrade the road network to meet the growing traffic requirement in of the State by augmenting the road capacity for safe and efficient movement-of the traffic of selected road stretches for NH connectivity to stone quarries at Mirzachowki (Jharkhand) for fulfillment of requirement of Stone metal and chips required for ongoing infrastructure development projects. Further Kahalgaon Thermal Power Station also serves the major supply of Fly-Ash in this region.

In pursuance of the above the Road Construction Department on behalf of MoRTH have decided to take up "Rehabilitation and Widening to 2-Lane with Paved Shoulder Configuration and Strengthening of existing Road Munger – Sultanganj – Bhagalpur from Km 70.150 to Km 121.025 under the District of Munger and Bhagalpur, in the State of Bihar. Total length is 50.875 km (22.85 km lying in Munger District from Munger to Bariyarpur) under EPC Mode" to improve the efficiency of freight movement having a total length 50.875 km and proposed Right of Way (ROW) varies between 10 m to 40 m.

Project stretch falls in the state of Bihar an Indian state considered to be a part of South Bihar Patna to Bhagalpur.

The Project will result in fast economic growth to the region as it will connect to capital Patna and generally traverses in the East-West direction and start from T-Junction Point at Munger i.e Ch. 69.400, passing through Herudiara, Sangrampur, Bishunpur, Fatmachak, Salempur, Nawagarhi, Brahamasthan, Binddiara, Mahdewa, Kalyanpur, Raghunathpur, Prem Tola, Ghorghat, Fatehpur, Kamarganj, Kushahi, Jhangira, Masdi, Sultanganj, Kasimpur, Afjuganj, Kalgama, Maheshi, Painenglish, Chichron, Alamgirpur, Akbarnagar, Basantpur, Ramchandarpur, Dogachi and Finally terminates at Ch. 121+025 at Start Point Jn. of Bhagalpur By-pass. (Bihar).

Absence of alternative mode of travel in the region between Munger to Bhagalpur leaves this Highway as the only means of communication.

This proposed project road will provide uninterrupted free flow of traffic and shall result in:-

- 1. Saving in travel time, cost and Natural resources (Fuel).
- 2. Saving in foreign exchange due to less consumption of fuel.
- 3. Increase in income of truck, bus, taxi etc. Owners as they will be able to communicate maximum distance in short time.
- 4. Reduction in accidents as it will provide safe travel.
- 5. Will act as catalyst to the Infrastructural & Industrial development.

Section from km 70.150 (Herudiara chowk) to km 93.000 (Bariyarpur) falls under the jurisdiction of Forest Division Munger having a length of 22.85 km. and km 93.000 (Bariyarpur) to km 121.025 (Bhagalpur) of proposed road falls under the jurisdiction of Forest Division Bhagalpur having a length of 28.025 km. Sufficient care has been taken during the design stage to keep the alignment along the existing road/highway to utilize its ROW. There is no forest areas located along the project road in view of the above.

The proposed alignment passing through the notified unprotected forest land from km 70.150 to km 93.000

The trees present in the proposed alignment have been jointly visited and the numeration list has been prepared. In total 1185 trees has been identified along the road/Highway alignment under Forest Division Munger, out of which 804 trees has been identified for the translocation and rest 381 trees has been marked to be cut.

Details of trees affected and to be translocated:

Details including species, name and the size of the trees after joint enumeration and verification has been prepared and attached herewith separately. Affected trees would be translocated in the ROW of the Project Munger to Bariarpur

Tree protection:

Project Period: 2021-22 to 2022-23

Tree Protection Period: 2021-22 to 2023-24

Name Of Road : Rehabilitation & Widening work for 2 - Lane with paved shoulder of existing National Highway 80 Alignment from KM 70.150 to Km 121.025 Munger - Sultanganj - Bhagalpur section in the state of Bihar under EPC Mode. Munger Div. From km 70.150 to 93.000 part of project. Existing Tree Propose Translocation Tree Propose Translocation Ch. 70+150 (LHS) Ch. 70+150 (RHS) 14 M Proposed Road = 14 m 32 M Δ **Existing Trees** Propose Translocation Tree Propose Translocation Tree **Existing Trees** 10 40 M **Existing Trees** Proposed Road = 14 m Ch. 93+000 (LHS) Ch. 93+000 (RHS)


TREE TRANSLOCATION PLAN



3. METHODOLOGY OF TREE TRANSLOCATION

Name of Project: "Rehabilitation & Widening work for 2—Lane with paved shoulder of existing National Highway 80 Alignment from KM 70.150 to Km 121.025 Munger — Sultanganj - Bhagalpur section in the state of Bihar" on EPC Mode. Bhagalpur Div. from km 93.00 to km 121.025 Part of Project

Subject:- Methodology of Tree Translocation within ROW

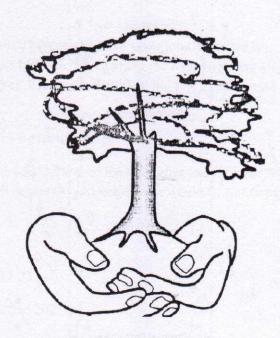

Methodology of Tree Translocation

1.General

2.Soil Testing

3.Tree Preparation

4.Root Excavation

Method


5.Transport

6.Planting Procedure

7. Tree Support

8. Watering

9. Maintenance










CONTENTS

- 1 General: Translocation or Transplantation of trees from one location to another site is a major operation. The work shall be executed & supervised by a well experienced person in this type of work. Roots investigation. Diagnosis of health & Treatment of infected area must be executed before initiation. The most difficult job is production of root ball by digging mechanically and manually all around the tree, carefully cutting the roots, then wrapping the root ball in netting. The difficulty is to handle the root ball without causing deformation.
- 2. Soil Testing: The work shall be executed supervised by a well experienced person in this type of work. Analysis of the soil at the proposed transplant site where the tree has to be translocated and if require any, import backfill materials so that appropriate amendments applied. Analysis may include pH. Organic Matter, Major and Trace Elements and Exchangeable Cations.

3. Tree Preparation:

3.1 Formative Pruning - Selectively remove specific branches to enhance form and improve structure, and to directionally shape the tree. With smaller

diameter branches it may be necessary to reduce the branch to a dormant bud. Formative pruning shall aim to reduce the development of structural weaknesses and to accommodate site constraints and reduce encroachment on utilities as the tree grows.

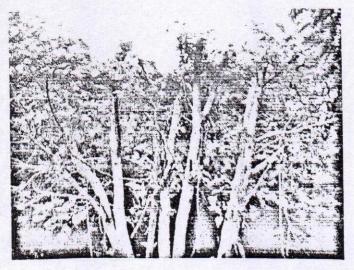


3.2 Root Preparation Requirements and Responsibilities -


In all cases a preparation of the root system, that is to say, a circular partial cutting of the roots all around the tree is strongly recommended one to two months before transplanting.

This ring cutting has the objective of spreading the period of trauma to which the tree is subjected so as to permit it to react in the best way.

Root pruning and soaking shall be carried out a minimum of 1 months before transplanting.

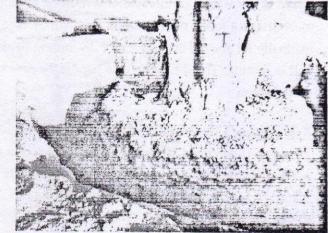


The pruning trench shall be backfilled with a sandy soil mixture and kept moist

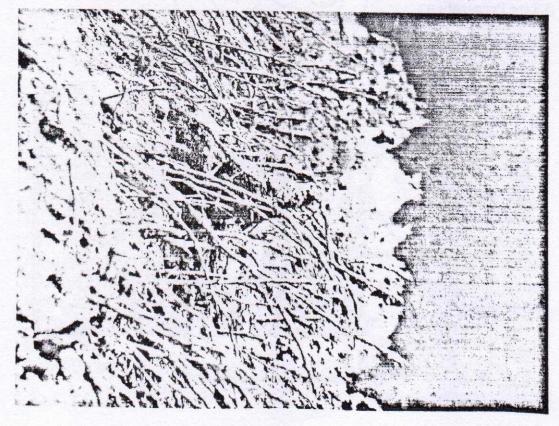

leading up to the transplant date. The soil moisture content shall be maintained to adequately support the health of the tree. The remaining soil shall be used to build a water holding berm around the outside of the backfilled trenches.


4. Root Excavation Method: Prior to digging, the soil around the root system shall be thoroughly moistened to help keep the root ball together.

The root ball shall be excavated around the outside of the root trench. All exposed roots shall be pruned flush with the face of the root ball. Sharp Blades shall be used to cut roots. Roots shall be cut in a way that will not jar and loosen the soil in the root ball. The depth of the root ball is depend on each individual tree species. Digging below the root ball shall occur when the amount of roots reduce considerably within the root ball trench. This will determine the depth of the root ball. Tension shall be applied by the crane while undercutting the root ball.

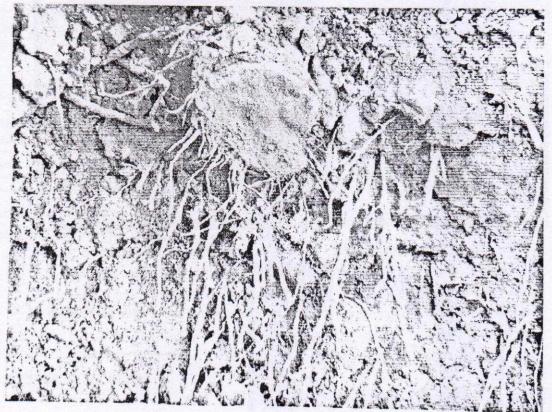


5. Transportation:

Lifting Technique - Lifting of trees shall be carried out or supervised by a qualified and/or suitably experienced person and crane operator using a crane and supports

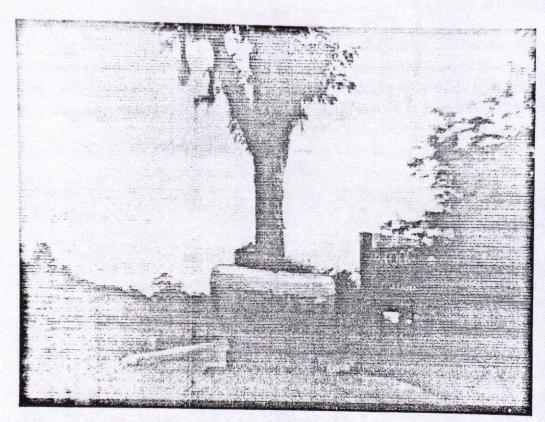

Appropriate lifting equipment shall be used. Suitable slings shall be attached around a balance point of the trunk and shall provide a support system around the root ball. When a sling is attached to the trunk, padding and protection is required to reduce possible damage. A qualified crane operator shall determine the support system to be used.


Preparation for Transport - Only natural fibre materials that have not been chemically treated shall be used to support the root ball. Synthetic materials shall not be used. Burlap shall be applied before moving the tree to protect the

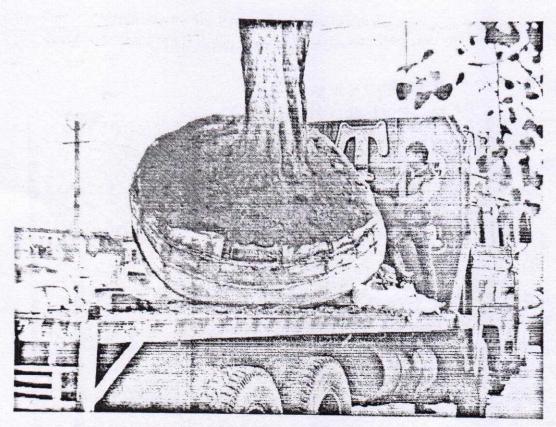

shape and structure of the root ball during transport. Once the tree is lifted burlap shall be used to cover the base of the root ball.


5.3 Transport Vehicle - The transport vehicle shall be adequate to transport the tree without damage.

6. Planting Procedure:

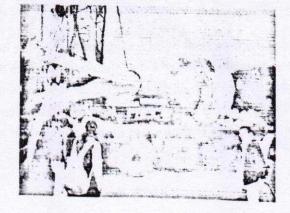

6.1 Preparation of Planting Hole - Excavated soil may be used as backfill if it is free of weeds, deleterious materials and particles larger than 25 mm. When backfilling, sedimentary layers in soil shall be observed so topsoil remains above the subsoil.

Remove from site any unsuitable material brought to the surface during

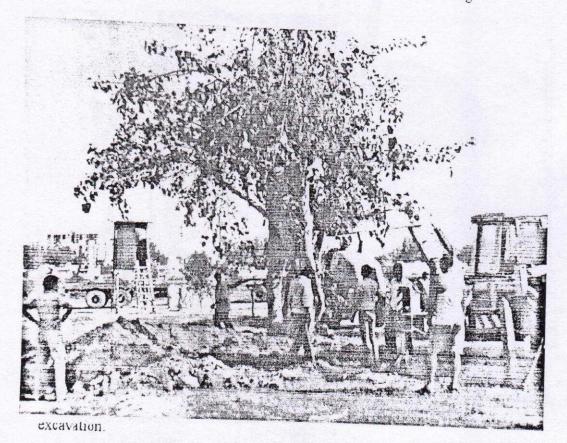

The planting hole shall be excavated by spade. The hole shall be 600 mm wider than the diameter of the root ball and no deeper than the height of the proposed root ball. If the depth of the hole exceeds the root ball height, compacted soil shall be added to the hole to prevent settling after transplanting. The sides of the hole shall be roughened to create an irregular surface that will facilitate root penetration

The bottom of the hole shall be decompacted to a depth of 150 mm and lightly compacted.

6.2 **Orientation** - The tree shall be orientated at the new site in the same direction as at the original site.



6.3 Backfill - If excavated material is unsuitable for backfill, imported soil shall be used. Imported soil shall be as closely as practicable to the existing site soil. Organic matter shall not be added to the backfill material.

Any soil deficiencies shall be rectified prior to placing backfill.

6.4 Fertilizer and Soil Additives - Requirements of fertilizer and/or other soil additives as per experienced person.

(a)TerraCottem

TerraCottem shall be applied as required.

(b)Gypsum

Gypsum shall be applied in accordance with the requirements

(c)Sugar


The backfill shall be soil injected with a sucrose solution at 20 grams per liter of water and approximately 100 liters of solution applied per tree. Soil injections of Sucrose Solutions have been shown to improve the defence systems of stressed trees and increase the volume of new roots.


(d)N-Fix

The backfill shall be soil injected with N-Fix at 10 ml N-Fix per 1 litre of water applying approximately 100 litres of solution per tree, evenly injected over the available root zone.

(e)Rooting Hormone

Photographs:

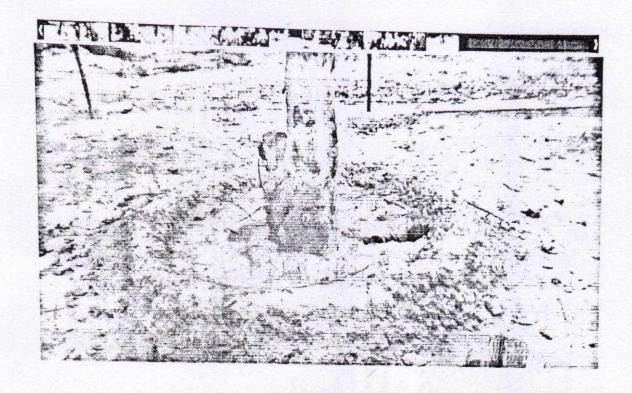

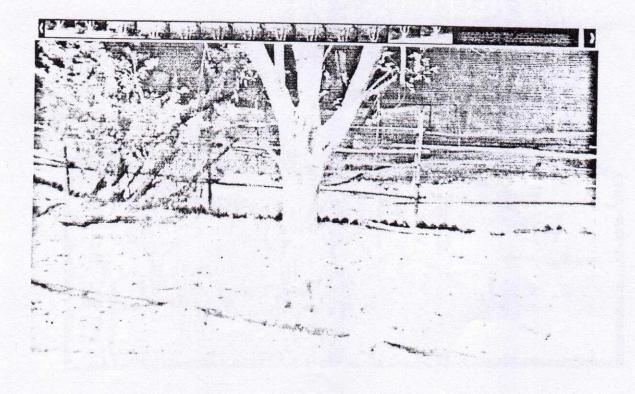



Rooting hormone shall be mixed with the backfill material before the tree is positioned

7. Tree Support:

Scaffoldings or hydraulic crane should be used to support pre and post translocation of the trees.

8. Watering: Immediately following planting, each tree shall be soaked to remove air pockets from the soil.

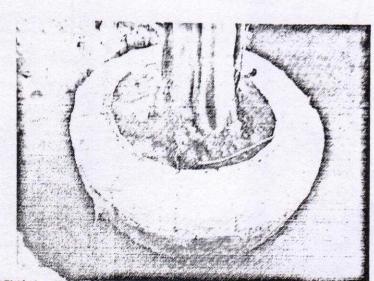

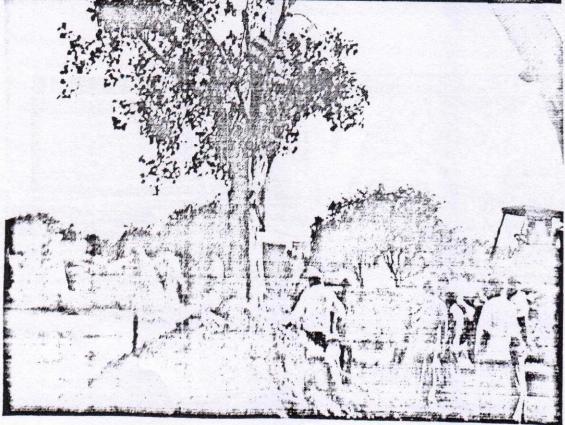

Ensure that trees maintain health and are free of water stress at all times.

Monitor moisture levels to determine the exact watering requirements to ensure tree survival.

Water shall be applied to the entire root area and not just the immediate trunk base.

9. Maintenance: The tree shall be maintained for a period of minimum one year. Regular inspection & strict schedule should be followed.

TE 20.10.22

20 Tolar

Executive Engineer
N. H. Division
Lakhisarai at Munger



5

		LIST OF	FELLING/	OF FELLING/ Inamplement	3 90 13		
PERSONAL PROPERTY AND ADMINISTRATION OF THE PERSON OF THE	Abstract of trees		at are likely to be affer KM 70,150 to 93,000	that are likely to be affected in NII-ou from KM 70, 150 to 93,000	MU-Su Iron		
			Abstract of tre	Abstract of tree to be cutting		1	- Terrat
Girth Size	0 - 30 cm	31-60 cm	m3 06 - 19	91 - 120 ст	121 - 150 cm	~150 cm	1014
5:11	2	101	32	25	=	13	196
RHS	o.	82	25	29	18	51	185
Tan L	30	183	57	54	29	28	381
		Abstract	Abstract of tree to be translocate	anslocate			
Girth Size	0 - 30 ст	31 - 60 ст	61 - 90 ст	91 - 120 cm	121 - 150 ст	>150 cm	Total
CLU	15	144	> 96	40	16	89	379
Sissa	51	173	106	46	24	19	425
Total	30	317	202	98	40	129	804
			Statement of the statem			COLUMN TO SERVICE STATE OF THE PARTY OF THE	THE PERSON OF TH

Executive Engineer
N.H. Division, Laklusarai at-Munger
E.t.
5.7.2.2.

पातिल छोने गाने वृत्तों की प्रजातियार पीतिएल विवरणी।

7		1.118	nor dan
oly or		duin the tind	पूर्वा की
1	_	AUNA	10
7	-	गम्ल	07
1	1	यतीव	11
1	-	YIFF	0
5	1	बीटाबीटा।	0
6		आग .	60
7	1	संखुआ	1
8	1	गनिजस	2
9	1	वाताम	3
10	-	जलेवी	2
11		नारियल	3
12	2	फरद	2
1	3	जेहल	3
	14	चकुण्डी	1
	15	मीलेश्वरी	2
	16	जहीर	-1
	17	गुलमोहर (150 से० भी० गोलाई से अधिक)	1
	18	शिरीस (150 से0 मी0 गोलाई से अधिक)	4
	19	शीशम (150 से0 मी0 गोलाई से अधिक)	1
	20	गम्हार (150 से0 मी0 गोलाई से अधिक)	4
L		- ফুল-	196

LHS	190
RHS	186
कुल-	
	981

	RHS	
oly ou	गृती की प्रकारि	वृक्षी की राठ
1	रवर्गात	12
2	यन्त	61
3	यक्त	18
1	(III)	2
6	द्य-।श्र-ग	
8	अाग	63
7	येर	1
0	लथोर	1
9	नारियल	5
10	जलेवी	3
11	जेहल	1
12	शीशम (150 से0 मी0 गोलाई से अधिक)	6
13	गुलमोहर (150 से0 गी0 गोलाई से अधिक)	1
14	अशोक (150 से0 गी0 गोलाई से अधिक)	1
15	शिरीस (150 से0 मी0 गोलाई से अधिक)	2
16	नीम (310 से0 मी0 गोलाई से अधिक)	1
17	गम्हार (150 से0 मी0 गोलाई से अधिक)	7
18	छतवन (150 से0 मी0 गोलाई से अधिक)	1
19	अर्जुन (310 से0 गी0 गोलाई से अधिक)	1
	যুল–	185

वृत्त प्रमंडल पदाधिकारी, भूगेर बन प्रमंडल, मुंगेर।

5. CALCULATION OF TREE TRANSLOCATION AT AVAILABLE / VACANT LOCATION BEYOND ORNAMENTAL

PLANTATION LINE

SI. No.	Chainage From	Chainage To	Length (M)	Nos. of Shade tree plants at one side		Remark
1				LHS	RHS	
1	70150	70759	609	1		THE SECOND
2	70759	70900	141	2	-	
3	70900	71000	100	2		BUILTUP AREA
4	71000	71200	200	2	- 1	BUILTUP AREA
5	71200	71450	250			BUILTUP AREA
6	71450	71700	250	P 25		BUILTUP AREA
7	71700	71900	200	B 0		BUILTUP AREA
8	71900	72000	100			BUILTUP AREA
9	72000	72200	200	Sec. 1		BUILTUP AREA
10	72200	72500	300			BUILTUP AREA
11	72500	72700	200	-		BUILTUP AREA
12	72700	72900	200			BUILTUP AREA
13	72900	73000	100			BUILTUP AREA
14	73000	73200	200	3	3	BOILTOF AREA
15	73200	73473	273	2	5	
16	73473	73473	0	-	-	
17	73473	76488	3015			
19	76488	76900	412	5		BUILTUP AREA
20	76900	77000	100	2		BUILTUP AREA
21	77000	77100	100	2		BUILTUP AREA
22	77100	77300	200	2		BUILTUP AREA
23	77300	77500	200	1	4-1-	BUILTUP AREA
24	77500	77700	200	2		BUILTUP AREA
25	77700	78000	300	2	-	
26	78000	78100	100	3		BUILTUP AREA
27	78100	78300	200	5		BUILTUP AREA
28	78300	78700	400	1		BUILTUP AREA
29	78700	79000	300	- 1		BUILTUP AREA
30	79000	79300	300	21	42	BUILTUP AREA
31	79300	79500	200	30	9	
32	79500	79700	200	3	38	
33	79700	80000	300	27	55	
34	80000	80300	300	30	27	
35	80300	80500	200	24	18	137
36	80500	80700	200	18	18	
37	80700	81000	300	60		1971
38	81000	81300	300	10	5	





(2)

D. CALCULATION OF TREE TRANSLOCATION AT AVAILABLE / VACANT LOCATION BEYOND ORNAMENTAL PLANTATION LINE

SI. No.	Chainage From	Chainage To	Length (M)	Nos. of Sh plants at o	Remark	
				LHS	RHS	
39	81300	81500	200	27	15	
40	81500	81700	200	14	22	
41	81700	82000	300	30		
42	82000	82300	300	14	33	
43	82300	82500	200	9	8	
44	82500	82700	200	5	4	
45	82700	83000	300	-	- X-54	
46	83000	83200	200	3	3	
47	83200	83500	300		3	
48	83500	83700	200	9	11	
49	83700	84000	300	3	15	
50	84000	84200	200	F129-11	-	BUILTUP AREA
51	84200	84500	300	-	-	BUILTUP AREA
52	84500	84700	200			BUILTUP AREA
53	84700	85000	300	-		BUILTUP AREA
54	85000	85200	200	-	-	BUILTUP AREA
55	85200	85500	300	12.		BUILTUP AREA
56	85500	85700	200			BUILTUP AREA
57	85700	85900	200	-	- 1	BUILTUP AREA
58	85900	86000	100	-		BUILTUP AREA
59	86000	86200	200	-		BUILTUP AREA
60	86200	86250	50	-		BUILTUP AREA
61	86250	86400	150			BUILTUP AREA
62	86400	86600	200	- Tarana	-	BUILTUP AREA
63	86600	86800	200	-		BUILTUP AREA
64	86800	87000	200	-	edent.	BUILTUP AREA
65	87000	87200	200			BUILTUP AREA
66	87200	87400	200		-	BUILTUP AREA
67	87400	87600	200	-	-	BUILTUP AREA
68	87600	87800	200	3	3	
69	87800	88050	250			
70	88050	88250	200	-		BUILTUP AREA
71	88250	88450	200	1	2	BUILTUP AREA
72	88450	88650	200	2	1	BUILTUP AREA
73	88650	88850	200	1	2	BUILTUP AREA
74	88850	89050	200	1	2	BUILTUP AREA
75	89050	89250	200	2	1	BUILTUP AREA

gov -the

A

L

. CALCULATION OF TREE TRANSLOCATION AT AVAILABLE / VACANT LOCATION BEYOND ORNAMENTAL

PLA	NTA	ATIC	NL	INF
				1141

VI. 18U. 1	Chainage From	Chainage To	Length (M)	Nos. of Shade tree plants at one side		Remark
				LHS	RHS	
76	89250	89350	100	1	2	BUILTUP AREA
77	89350	89450	100	1	1	BUILTUP AREA
78	89450	89650	200	2	2	BUILTUP AREA
79	89650	89850	200	1	1	BUILTUP AREA
80	89850	90050	200	2	1	BUILTUP AREA
81	90050	90250	200	3	5	
82	90250	90450	200		8	-articles
83	90450	90650	200	17	16	
84	90650	90900	250	2	15	
85	90900	91200	300	-		
86	91200	91500	300	4	7	BUILTUP AREA
87	91500	91700	200		2	BUILTUP AREA
88	91700	92000	300		-	BUILTUP AREA
89	92000	92200	200	-		BUILTUP AREA
90	92200	92500	300	y -		BUILTUP AREA
91	92500	92700	200		<u> </u>	BUILTUP AREA
92	92700	93000	300	-		BUILTUP AREA
	To	tal length=	22850	417	387	

804

EXECUTIVE ENGINEER N.H. DIVISION, MUNGER

For M.G. Contractors Pvt. Ltd.

Authorized Signatory