

**कार्यालय अधिशासी अभियन्ता
प्रान्तीय खण्ड, लोक निर्माण विभाग, बागेश्वर**

पत्रांक -226 / 2ई0व0भू0,
सेवा में,

दिनांक 29 / 01 / 2019

प्रभागीय वनाधिकारी,
बागेश्वर वन प्रभाग,
बागेश्वर।

विषय :- राज्य योजना के अन्तर्गत जनपद बागेश्वर में मोनियॉभ्योल-गुमची-भनार-भूमियागाड़-धार की टोली-सब्जी-भेंसखाल-भोलाथल मोटर मार्ग का निर्माण।
प्रस्ताव संख्या-FP/UK/ROAD/23185/2016)

सन्दर्भ :- **Online Objection Dated 08-11-2018**
महोदय,

कृपया उपरोक्त विषयक सन्दर्भ का अवलोकन करने का कष्ट करें, भारत सरकार द्वारा लगायी गयी आपत्तियों का निस्तारण कर निस्तारण आख्या निम्न प्रकार है :-

क्र०सं	लगायी गयी आपत्ति	आपत्ति का उत्तर
1	The following documents are required to be submitted in original	
a)	Undertaking of NPV	Enclosed
b)	Reclamation Plan	Enclosed
c)	Part II & V	Action taken from your end please
d)	Site inspection report of CE	Action taken from your end please
2	As per DSS analysis CA area is overlapping with the area proposed for CA for some other proposal (Online No. FP/UK/ROAD/23336/2016)	CA map has been changed and uploaded in part-I & authenticated by DFO hard copy is enclosed.
3	Employment details filled incorrect.	Permanent employees are shown Zero (0) and Temporary employment is shown 3x365x20=21900 mandays on online at part-I
4	Incomplete muck disposal plan is found uploaded.	Complete muck disposal plan has been prepared and uploaded at part-I and hard copy enclosed as Sl. 1 (b) above.
5	CA site suitability certificate not submitted and ploaded at Part-II	Action taken from your end please


Therefore, you are request to upload the same from your end please.

Executive Engineer
Provincial Division PWD
Bageshwar

Name of work :- Construction of Moniyabhiyol-Gumchi-Bhanar-Bhumiyagad-Dhar ki Toli-Sabji-Bhaiskhal-Bholathal motor road in District Bageshwar

DIGITAL MAP(Compensatory Afforestation)

Scale 1:20000

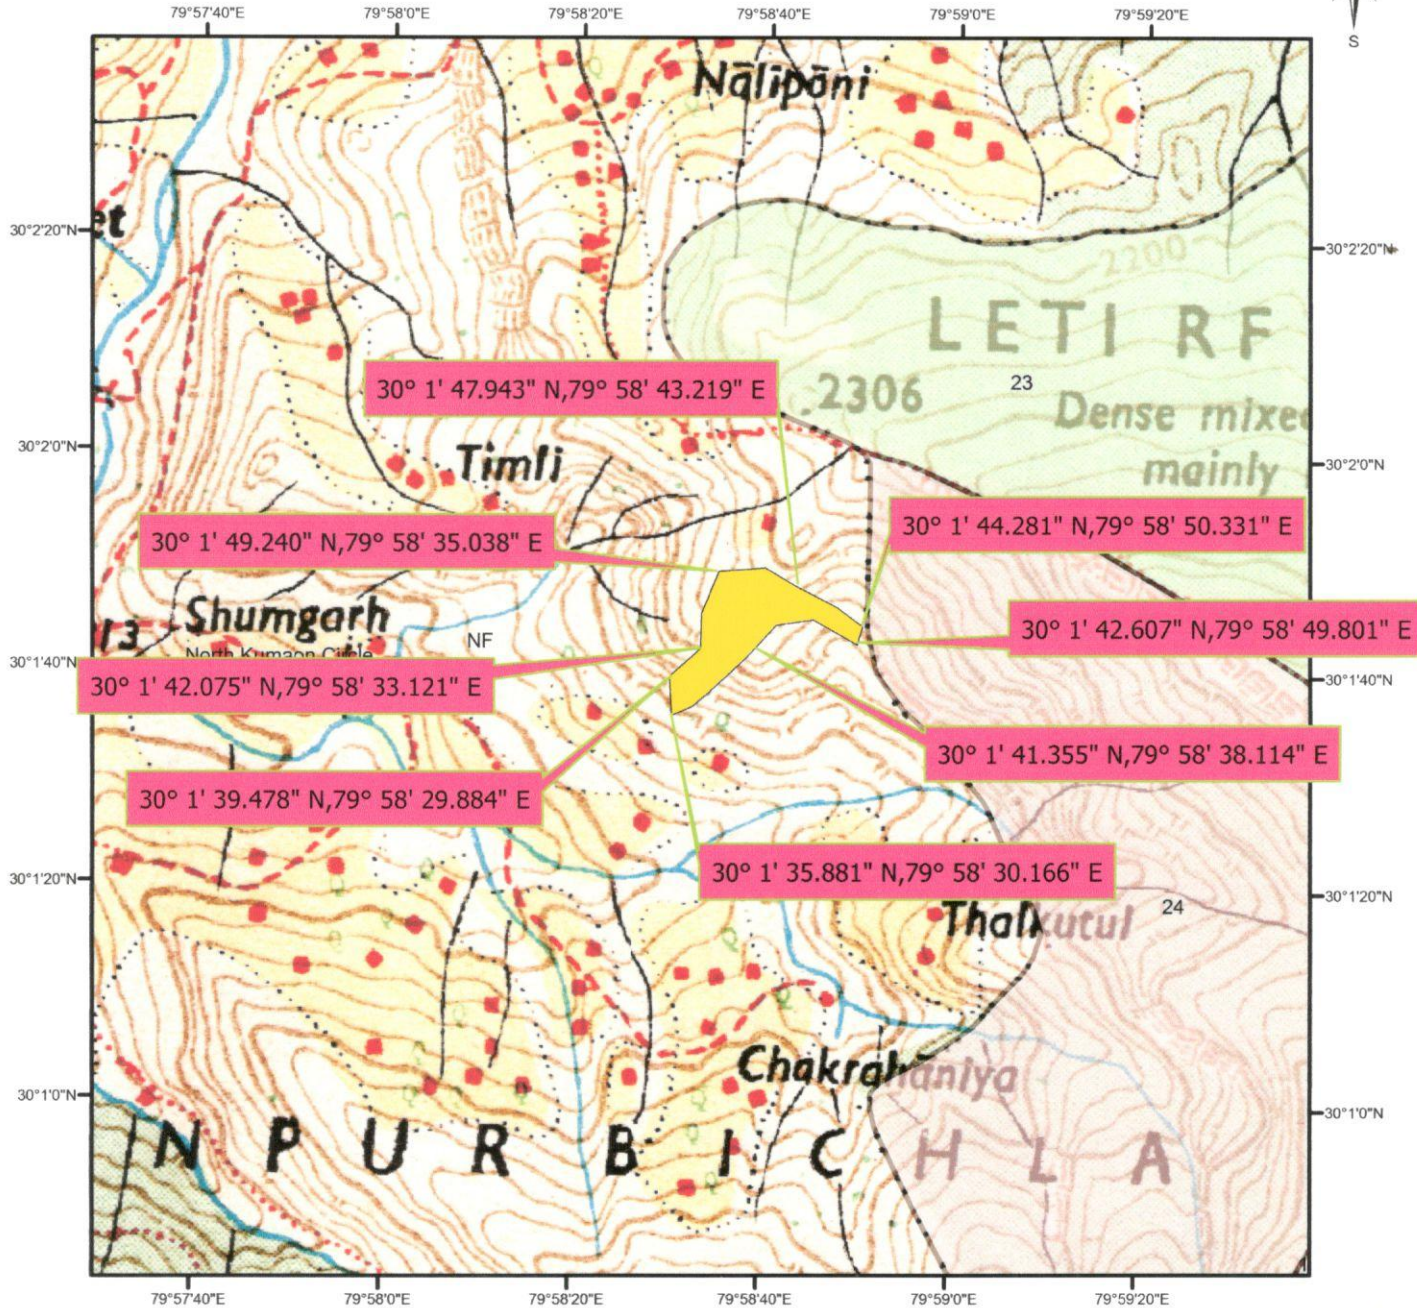

Legend

Ca Area Sumgar 8.00 Ha



सहायक अभियन्ता
प्रान्तीय खण्ड लोक निर्माण विभाग
बागेश्वर

अधीक्षक अभियन्ता
प्रान्तीय खण्ड लोक निर्माण विभाग
बागेश्वर

Name of work :- Construction of Moniyabhiyol-Gumchi-Bhanar-Bhumiyagad-Dhar ki Toli-Sabji-Bhaiskhal-Bholathal motor road in District Bageshwar

GEO REFERENCE MAP(Compensatory Afforestation)

Scale 1:20000

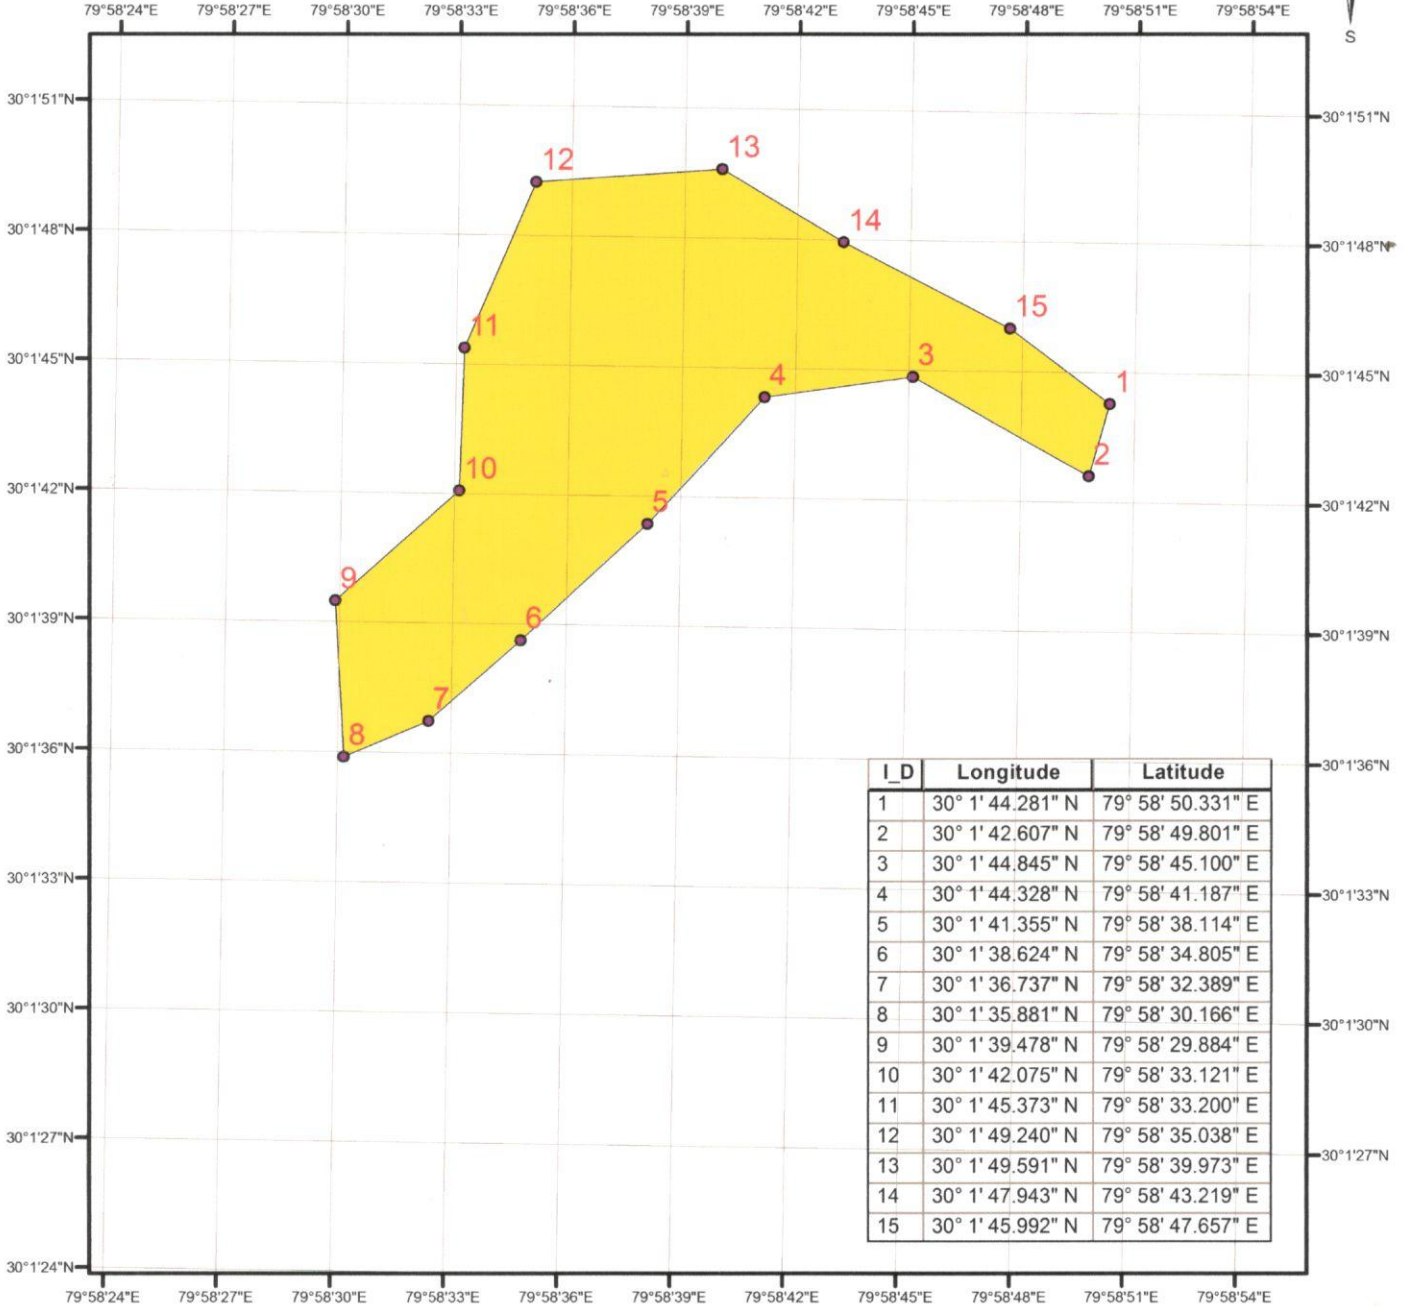

Legend

• GPS CA

 Ca Area Sumgar 8.00 Ha

सहायक अभियन्ता
प्रान्तीय खण्ड लोक निर्माण विभाग
बागेश्वर

अधीक्षक अभियन्ता
प्रान्तीय खण्ड लो०नि०वि०
बागेश्वर

प्रमुख अभियन्ता
प्रान्तीय खण्ड लो०नि०वि०
बागेश्वर

परियोजना का नाम:-जनपद बागेश्वर में विधानसभा क्षेत्र बागेश्वर के अन्तर्गत
मोनियाँभ्योल-गुमची-भनार-भूमियागाड़-धार की टोली-सब्जी-
भेंसखाल-भोलाथल मोटर मार्ग निर्माण।

भारत सरकार के पत्रांक 11/मिस0/618/2010/उप्र0,राज0, उत्तराखंड/11/58 दिनांक 16.04.14
साथ संलग्न प्रारूप के अनुसार मलवा निस्तारण योजना।

MUCK DISPOSAL PLAN

1. Calculation of muck to be generated. Swell factor has to be applied	21001.00 cum. As per item no. 1 of enclosed muck disposal plan.
2. Quantity of muck to be utilized in the project activities.	Approximate 85% i.e. 17851 cum. As per item no. 2 of enclosed muck disposal plan.
3. Balance quantity of muck which requires disposal/ Management plan.	3150.00 cum, As per item no. 3 of enclosed muck disposal plan.
4. Carriage of muck from the muck generation site to the dumping site.	Provision for carriage of muck to muck disposal site is being made Rs. 1,73,250.00As per item no. 4 of enclosed muck disposal plan.
5. Ownership of land and the consent of land owners, in case muck disposal is proposed on non forest land. Photo graph & carrying capacity of proposed dumping site (Muck disposal site)	State Govt.Forest land. . (Private land not available) Muck dumping site proposed in khud side of the road in each km. for which 0.068 hect. extra area is being included in the land schedule. Muck disposal site shown in Google map. Carrying capacity of proposed dumping site is 740cum as per item no. 5(a) of enclosed muck disposal plan.
6. Development of dumping site- construction of retaining walls and other structure as per requirement of the site. The objective is to completely stop rollig down of the muck.	Provision for development and construction of retaining walls etc. in dumping site Rs. 1,12,200.00 is being made as per item no. 5(b) of enclosed muck disposal Hence total provisions for muck disposal will be made Rs. 2,85,450.00 As per item no. 6 of enclosed muck disposal plan.,
7. Rehabilitation of dumping site like leveling, planting of grass, shrubs and tree species	Dumping site selected in khud side of the proposed motor road.After construction of motor road plantation will be made by the Forest Department through the provisions of both site plantation fund to be deposited by this Department.
8. Re-clamation Plan fro Muck-Disposal	Taken Rs. 22,440.00 .

Note- Cost to be incurred on the above activities has to be given component wise. Detail of dumping site including length, width and height of structures to be executed must be meintioned.


Enclosed - Muck disposal plan.


Undertaking


I undertaking that -

- 1.
- 2.
- 3.

Muck management plan will be implemented by the user agency.
The proposed dumping site is located away from river/ Stream/ Nala.
Dumping site is not located in reserved forest


Junior/ Engineer
Provincial Division PWD
Bageshwar


Assistant Engineer
Provincial Division PWD
Bageshwar


Executive Engineer
Provincial Division PWD
Bageshwar

परियोजना का नाम:- जनपद बागेश्वर में विधानसभा क्षेत्र बागेश्वर के अन्तर्गत
मोनियाँभ्योल- गुमची-भनार-भूमियागाड़-धार की टोली-सब्जी-
भेंसखाल-भोलाथल मोटर मार्ग निर्माण।

MUCK DESPOSAL PLAN

- 1 Maerial received from hill side cutting
1/3 x 7500x 3x2+1.5/2 = 15000.70 Cum.
40 % for swell factor. = 6000.30 Cum
Grand total :- = 21001.00 Cum.

- 2 Total material (muck) used in motor road during construction – details as given below

S No.	ITEM	QUANTITY (Cum)
1.	R.R. Stone Masonary laid in 1:6	5733
2.	R.R. Stone Masonary laid in dry	5733
3.	Hand Packed Stone Filling	2345
4.	Wire-crate Construction	1173
5.	Parapet Construction	0
6.	Granular Sub-base/Basc/Surface 00	2867
	Total Muck	17851

- 3 Balance material (muck) to be deposited in muck desposal site. = 3150.00 Cum,

- 4 Cost of cartage of balance muck upto dumping site 3150.00 Cum @ Rs. 55.00/Cm. = Rs. 1,73,250.00

- 5 Location and capacity of muck dumping yard.

(a) Construction of R.R. dry wall including supply of all materials, labour and T&P etc. required for proper completion of the work as per PWD detailed specification.

Location Size of dumping yard. Qty.
(in cum)

In KM. 1 1x50x2x1.00 100

In KM. 2 1x80x2x1.00 160

In KM. 6 1x80x1x1.00 80

Total = 340

Type of Capacity of
land dumpig yard.
Van Panchayat 200 Cum
Van Panchaya 360 Cum
Civil Land 180 Cum
740 Cum.

- (b) Total cost of construction of dumpig yard 340 cum @ 330.00 per cum.

= Rs. 1,12,200.00

- 6 Total Cost of muck desposal plan (4 + 5(b)) = Rs. 2,85,450.00

- 7 Re-Clamation Plan- Taking 20% of item No. 5(b) Rs. 1,12,200.00 = Rs. 22,440.00

- 8 Dumpig site selected in khud side of the proposed motor road. After construction of motor road plantation will be made by the Forest Department through the provisions of both side plantation fund to be deposited by this Department.

Junior Engineer
PD PWD Bageshwar


Assistant Engineer
PD PWD Bageshwar


Executive Engineer
PD PWD Bageshwar

परियोजना का नाम:- जनपद बागेश्वर में विधानसभा क्षेत्र बागेश्वर के अन्तर्गत मोनियॉम्बोल-
गुमची-भनार-भूमियागाड़-धार की टोली-सब्जी- भेंसखाल-भोलाथल
मोटर मार्ग निर्माण।

एन0पी0वी0 की बढ़ी दरों के अनुसार अतिरिक्त धनराशि जमा कराये जाने का प्रमाण पत्र।

प्रमाणित किया जाता है कि यदि भविष्य में मा0 उच्चतम न्यायालय/
भारत सरकार द्वारा एन.पी.वी. की वर्तमान दरों में कोई बढ़ोत्तरी की जाती है तो एन.पी.वी. की
बढ़ी हुई धनराशि का भुगतान वन विभाग की मांग के अनुसार किया जायेगा।


सहायक अभियंता
प्रांतीय खेड, सी0मि0वि0
प्रांतीय खेड, सी0मि0वि0
बागेश्वर


अधिशाली अभियंता
प्रांतीय खेड, सी0मि0वि0
प्रांतीय खेड, सी0मि0वि0
बागेश्वर

नोट- उक्त प्रमाण पत्र प्रयोक्ता एजेन्सी द्वारा निर्गत कर प्रस्ताव के साथ संलग्न किया जाना है।