

ABSTRACT OF COST

Name of work :- C/o Dumping Site on road Gadasu-Lahuti-Punan Khasra No. 123/2 and 6/6

Sr. No.	Description of item	Qty.	Unit	Rate	Amount
1	Earth work in excavation for structure such as per drawings and technical specification clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious materials and disposal of materials up to a lead of 50 m, dressing of sides and bottom and back filling in trenches with excavated suitable materials within all leads and lifts and other incidentals and as per directions of Engineer-in-charge.	58.88	Cubic Meter	391.15	23031
2	Providing and laying of boulder apron laid in wire crates with 4mm dia GI wire conforming to IS: 280(Two hundred eighty) and IS: 4826(Four thousand eight hundred twenty six) in 100mm x 100mm(One hundred millimeter x One hundred millimeter) mesh (woven diagonally)including 10(Ten) percent extra for laps and joints laid with stone boulders weighing not less than 25 kg. (Twenty five kilogram) each as per drawing and technical specifications clause 1301 .	450.00	Cubic Meter	3040.00	1368000
				Total :-	1391031

Assistant Engineer
Nankhari Sub- Division
HP.PWD. Nankhari

Executive Engineer
Rampur Division (B&R)
H.P.P.W.D. Rampur Dist.

c/c

Divisional Forest Officer
Rampur Forest Division
Rampur Bushahr (H.P.)

DETAIL OF MEASUREMENT


Name of work :- C/o Dumping Site on road Gadasu-Lahuti-Punan Khasra No. 123/2 and 6/6

Sr. No.		Khasra No.	Description	Length (in Mtrs.)	Height (in Mtrs.)	Excavation			Boulder Apron				
						L	X sec. area	Qtys.	Discription	L	B	D/H	Qtys.
1		Khasra No. 123/2	wire crate	56.00	3.75	56.00	0.58	32.48	1st layer :- Stretcher crates	56.00	1.25	1.25	87.50
									2nd layer :- Stretcher crates	56.00	1.25	1.25	87.50
									3rd layer :- Stretcher crates	56.00	1.25	1.25	87.50
		Khasra No. 6/6	wire crate	40.00	3.75	40.00	0.66	26.40	1st layer :- Stretcher crates	40.00	1.25	1.25	62.50
									2nd layer :- Stretcher crates	40.00	1.25	1.25	62.50
									3rd layer :- Stretcher crates	40.00	1.25	1.25	62.50
		Total :-					58.88						450.00
							Cu.m.						Cu.m.

NAME OF WORK: - CONSTRUCTION OF DUMPING SITES FOR GADASU-LAUHTI-PUNAN
ROAD KM 0/000 TO 6/478


NOT TO SCALE

EXCAVATION WORK:-
 $\frac{1}{2}(0.33+0.63)1.25=0.58\text{sqm}$

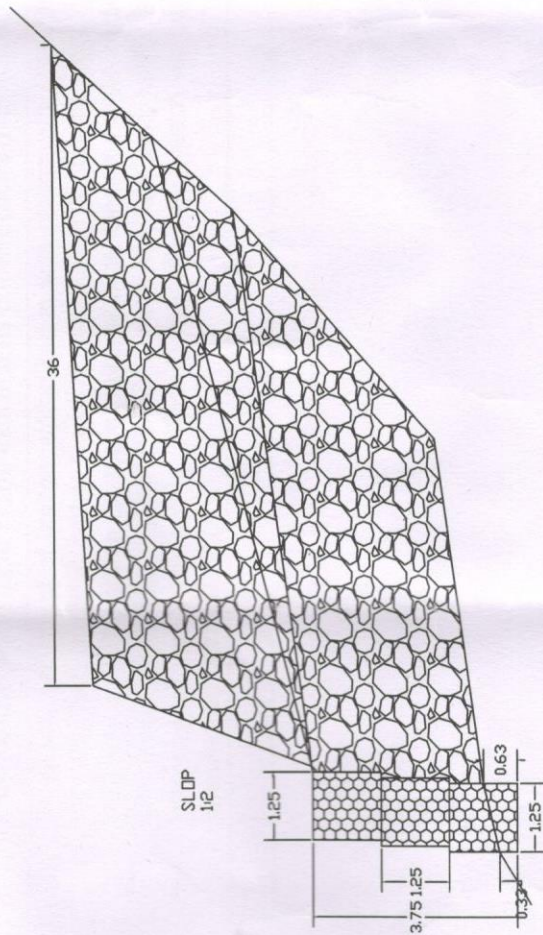

DUMPING SITE-1 (KHASRA NO.
123/2)

EXCAVATION WORK:-
 $\frac{1}{2}(0.33+0.73)1.25=0.66\text{sqm}$

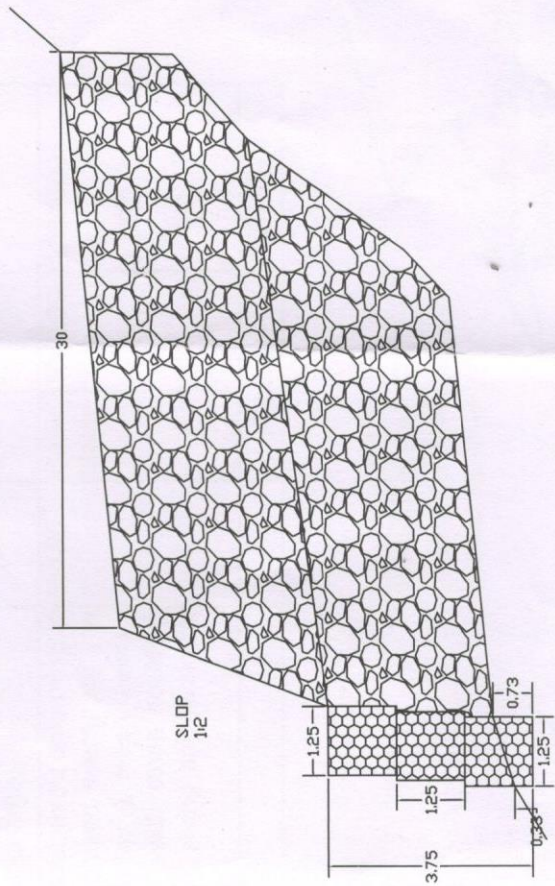

DUMPING SITE-2
(KHASRA NO. 6/6)

Assistant Engineer
Nankhari Sub-Division
HP.PWD. Nankhari