

कार्यालय अधिशासी अभियन्ता,  
निर्माण खण्ड, लोक निर्माण विभाग, रानीखेत

दूरभाष :- 05966-220035 फैक्स :- 05966-220035 ई-मेल cdpwdrkt@gmail.com  
पत्रांक 591 /18सी. दिनांक, रानीखेत, 14-3-2016

सेवा में,

प्रभागीय वनाधिकारी, अल्मोड़ा  
वन प्रभाग, अल्मोड़ा।

विषय :- बयेला नाड मोटर मार्ग के वन भूमि हस्तान्तरण के सम्बन्ध में। (प्रस्ताव सं. 9364/2015)


संदर्भ :- आपका पत्रांक मेमो/12-1 दिनांक 2.3.2016

उपरोक्त विषयक संदर्भित पत्र के क्रम में आपको अवगत कराना है कि आप द्वारा उपरोक्त मोटर मार्ग के वन भूमि हस्तान्तरण प्रस्ताव में आन लाईन द्वारा आपत्तियों में लौटाया गया था। जिसकी आख्या विन्दुवार निम्नवत है:-

|   |                                                                                                                  |                                                                                                                                                         |
|---|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | The Period for Which forest Land is proposed to be diverted is not mentioned in para A- 1-X                      | Mentioned in Para A-1-X                                                                                                                                 |
| 2 | Village wise Breakup of land not provided in para -2,3                                                           | Village wise breakup provided                                                                                                                           |
| 3 | Both the alternatives start form the same point but, they are stared to start form different points in the text. | Both the alignments/alternatives start from the same point with minor variations because there was no alternative and it is corrected in the statement. |
| 4 | Scanned copy of map of land proposed for CA usding GPS or total station is not proper                            | Proper scanned copy of map of land proposed for CA using GPS is attached                                                                                |
| 5 | Copy of map in SOI toposheet indicating location of CA ia not clear.                                             | Clear SOI toposheet duly signed by forest and revenue officers is enclosed.                                                                             |
| 6 | Owner wise details of nap land selected for muck dumping along with map and reclamation plan is not sumittrd.    | Owner wise detail of nap land selected for dumping along with map and reclamation plan is attached                                                      |
| 7 | Working Plan prescription for the area proposed for diversion and its disrance from boundary of forest not givin |                                                                                                                                                         |

(संजय प्रसाद सिन्हा)  
अधिशासी अभियन्ता,  
निर्माण खण्ड, लोक निर्माण विभाग,  
रानीखेत

कार्य का नाम :- बयोला नाड मोटर मार्ग के निर्माण हेतु क्षतिपूरक वृक्षारोपण हेतु चयनित स्थल

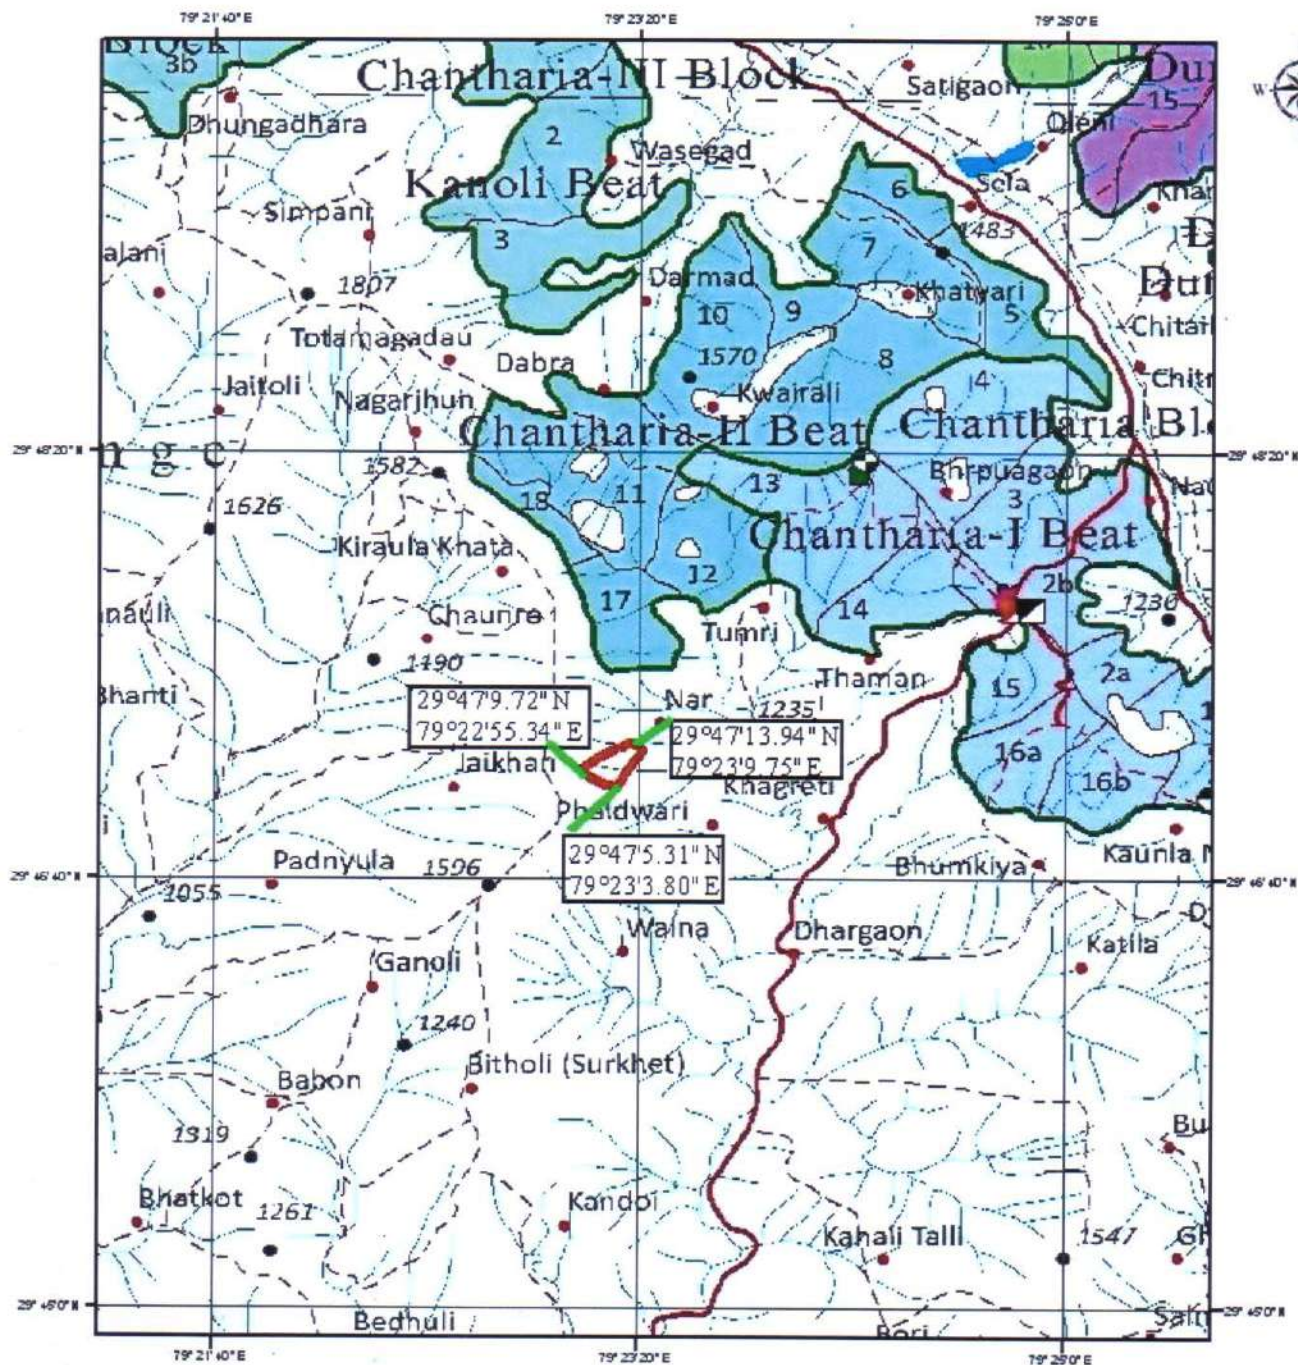

### Legend


Planction Area

0 0.35 0.7 1.4 2.1 2.8 Kilometers

अधिकासी अभियन्ता,  
निर्माण खण्ड, लो० वि० वि०,  
राजीवगढ़

अधिकासी अभियन्ता,  
निर्माण खण्ड, लो० वि० वि०,  
राजीवगढ़ (अलगोडा)

कार्य का नाम :- बयोला जल मोटर मार्ग के निर्माण हेतु क्षतिपूर्क वृक्षारोपण हेतु  
चयनित स्थल

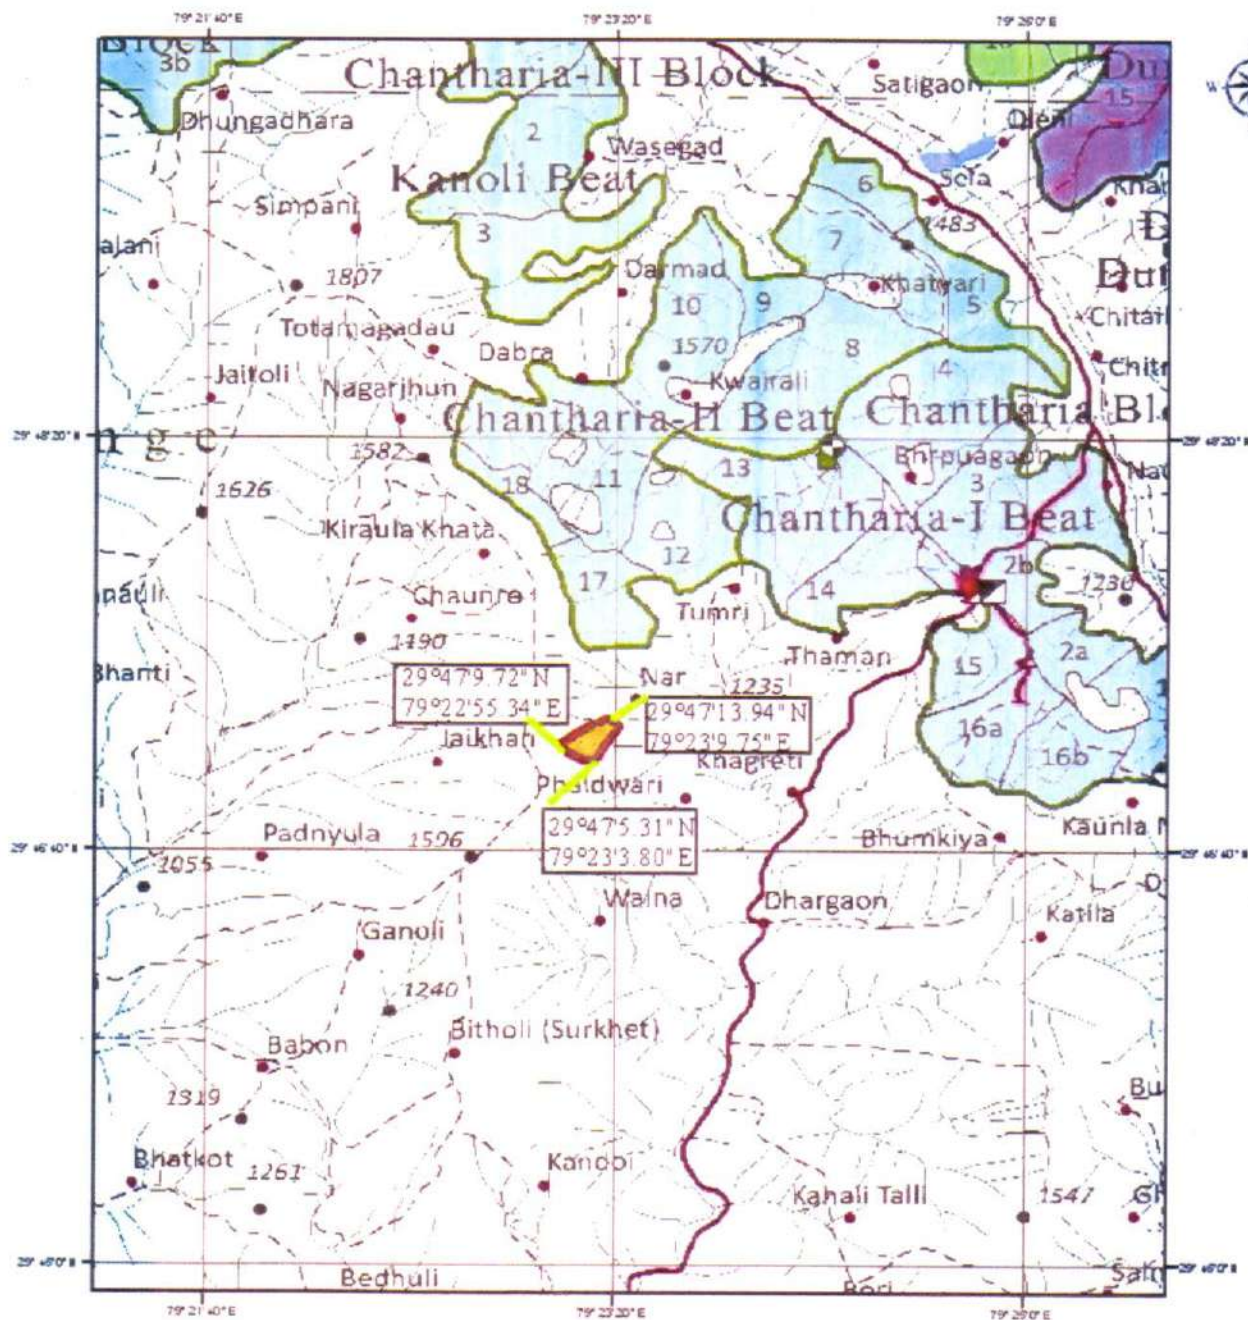

**Legend**

— Plantation Area

सहायक अभियन्ता  
जिला पंचायत, बयोला  
सहायक अभियन्ता

अधिष्ठाता अभियन्ता,  
निर्माण खण्ड, लाओनो विभाग,  
राजीवगढ़ (अमरावती)

## मलुवे के निस्तारण का प्राक्कलन

परियोजना का नाम :- द्वाराहाट सुरईखेत मोटर मार्ग से वयेला-नाड़ मोटर मार्ग का नव निर्माण (लम्बाई 8.00 किमी०)।

| S.No     | Item of work                                          | No      | Length  | Width             | Height       | Qty             | Unit        |
|----------|-------------------------------------------------------|---------|---------|-------------------|--------------|-----------------|-------------|
| <b>A</b> | <b>कटिंग कार्य से निकले मलवे की मात्रा</b>            |         |         |                   |              |                 |             |
|          |                                                       | 1x8x1/2 | 1000.00 | 6.00              | 2.75         | 66000.00        |             |
|          | Swelling factor 30%                                   |         |         |                   |              | 19800.00        |             |
|          |                                                       |         |         |                   | <b>Total</b> | <b>85800.00</b> | <b>Cum.</b> |
| <b>B</b> | <b>निर्माण कार्य में प्रयुक्त मलुवे की मात्रा</b>     |         |         |                   |              |                 |             |
| 1        | Retaining Walls                                       | 1x8     | 250.00  | (2.50+0.6)/2      | 4.00         | 12400.00        |             |
| 2        | Breast Walls                                          | 1x8     | 150.00  | (0.90+0.60)/2     | 1.50         | 1350.00         |             |
| 3        | H.P. Stone Filling                                    | 1x8x1/2 | 2.50    | 0.90              | 4.00         | 36.00           |             |
| 4        | Constt. Of scupper                                    | 1x8x5   |         | 37.09             |              | 1483.60         |             |
| 5        | Soling Works                                          | 1x8     | 1000.00 | 4.05              | 0.12         | 3888.00         |             |
| 6        | Constt. Of pucca Drain                                | 1x8     | 200.00  | 0.60              | 0.60         | 576.00          |             |
|          |                                                       |         |         |                   | <b>Total</b> | <b>19733.60</b> | <b>Cum.</b> |
| <b>C</b> | <b>सतह निर्माण में प्रयुक्त मलुवे की मात्रा</b>       |         |         |                   |              |                 |             |
| 1        | Road Constt. In Filling                               | 1x8x12  | 25.00   | 6.00              | 0.70         | 10080.00        |             |
| 2        | Making Subgrade and superelevation                    | 1x8     | 1000.00 | 6.0x(0.00+0.30)/2 |              | 7200.00         |             |
| 3        | Stacking for pattri/ rut Filling                      | 2x8     | 1000.00 | 1.00              | 0.50         | 8000.00         |             |
|          |                                                       |         |         |                   | <b>Total</b> | <b>25280.00</b> | <b>Cum.</b> |
| <b>D</b> | <b>निर्माण के दौरान क्षति</b>                         |         |         |                   |              |                 |             |
| 1        | During Construction ( By excavator and Tipper         | 1x8x1/2 | 1000.00 | 2.25              | 1.16         | 10440.00        |             |
|          |                                                       |         |         |                   | <b>Total</b> | <b>10440.00</b> | <b>Cum.</b> |
| 2        | Natural Diposal due to Rain and steep slope L.S. 15 % |         |         |                   |              | 12870.00        |             |
|          | <b>Total Quantity</b>                                 |         |         | <b>( B+C+D+2)</b> |              | <b>68323.60</b> |             |
|          | <b>Balanced Quantity for required disposal</b>        |         |         |                   |              | <b>17476.40</b> | <b>Cum.</b> |

J.E.

सहायक अभियन्ता II  
प्रमाणित सड़क, ली. नि. वि.  
वाराणसी

अभियन्ता E.E.  
प्रमाणित सड़क, ली. नि. वि.  
वाराणसी

प्रभागीय वनाधिकारी  
सहायक वन प्रभाग अल्मोड़ा

### Detail of measurment

Name of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (

Length 8.00 Km.)

| S N | Particulars                                                                                                                                                                                                                                                          | No.                 | L               | B            | H/D          | Quantity          |      |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------|--------------|--------------|-------------------|------|
| 1   | 2                                                                                                                                                                                                                                                                    | 3                   | 4               | 5            | 6            | 7                 |      |
| 1   | Excavation in foundation for retaining & breast walls in all types of soils and rocks including lead, lift and disposal of surplus material as per direction of engineer - in - charge<br>Dumping Yard no.-1                                                         | 1x1/3               | 175.00          | 1.50         | 1.00         | 1312.50           |      |
|     |                                                                                                                                                                                                                                                                      |                     |                 |              | Total        | 1312.50           | cum  |
| 2   | Providing and laying of wire crates 3.00x1.50x1.50 in size with a 10 gauge BWG GI wire conforming to IS: 280 & IS:4826 in 150mm x 150mm mesh laid with stone boulders weighing not less than 25 kg each.(As per PWD Uttarakhand Specification)<br>Dumping Yard no.-1 | 1x2x3x50<br>1x2x3x6 | 3.50<br>3.50    | 1.50<br>1.50 | 1.50<br>1.50 | 2362.50<br>283.50 |      |
|     |                                                                                                                                                                                                                                                                      |                     |                 |              | Total        | 2646.00           | cum  |
| 3   | Random Rubble stone masonry in Coolie walling including supply of all material, labour, T&P etc. required for proper completion of the work.(As per PWD Uttarakhand specifications)<br>Dumping Yard no.-1                                                            | 1x2<br>1x2          | 175.00<br>18.80 | 0.60<br>0.60 | 1.55<br>1.55 | 325.50<br>34.97   |      |
|     |                                                                                                                                                                                                                                                                      |                     |                 |              | Total        | 360.47            | cum  |
|     | Required area of Civil land                                                                                                                                                                                                                                          | 1x1                 | 175.00          | 20.00        |              | 3500.00           |      |
|     |                                                                                                                                                                                                                                                                      |                     |                 |              | Total        | 3500.00           | Sqm  |
|     |                                                                                                                                                                                                                                                                      |                     |                 |              | Or           | 0.35              | Hect |

### Detail of measurment

Name of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (

Length 8.00 Km.)

### Capacity of dumping yard

| Sl. No. | Particulars of item                            | No. | L      | B     | H/D   | Quantity |     |
|---------|------------------------------------------------|-----|--------|-------|-------|----------|-----|
| 1       | 2                                              | 3   | 4      | 5     | 6     | 7        |     |
| 1       | Capacity of Dumping Yard<br>Dumping Yard no.-1 | 1x1 | 175.00 | 20.00 | 6.05  | 21175.00 |     |
|         |                                                |     |        |       | TOTAL | 21175.00 | cum |
|         | Required Qty. For proposed dumping yard (say)  |     |        |       |       | 17476.40 | cum |

*[Signature]*

सहायक अभियन्ता II  
निर्माण खण्ड, ली० नि० वि०  
राजीव

अभियन्ता अभियन्ता,  
निर्माण खण्ड, ली० नि० वि०,  
राजीव

**BILL OF QUANTITY**

of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. ( Length 8.0

**Construction of Dumping Yard**

| S. No | Unq. ID | Ref. no  | Item of work                                                                                                                                                                                                                                   | Qty         | Unit  | Rate       | Amount Rs. |
|-------|---------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|------------|------------|
| 1     | 2       | 3        | 2                                                                                                                                                                                                                                              | 3           | 4     | 5          | 7          |
| 1     | 75476   | 16-1     | Excavation in foundation for retaining & breast walls in all types of soils and rocks including lead, lift and disposal of surplus material as per direction of engineer - in - charge                                                         | 1312.50     | Cum.  | 234.80     | 308175.00  |
| 2     | 75486   | 16-9-2-1 | Providing and laying of wire crates 3.00x1.50x1.50 in size with a 10 gauge BWG GI wire conforming to IS: 280 & IS:4826 in 150mm x 150mm mesh laid with stone boulders weighing not less than 25 kg each.(As per PWD Uttarakhand Specification) | 2646.00     | Cum.  | 739.92     | 1957828.32 |
| 3     | 75481   | 16-6     | Random Rubble stone masonry in Coolie walling including supply of all material, labour, T&P etc. required for proper completion of the work.(As per PWD Uttarakhand specifications)                                                            | 360.47      | Cum.  | 689.94     | 248701.29  |
| 4     |         |          | Rate of Unirrigated Nap land                                                                                                                                                                                                                   | 0.35        | Hect. | 1125000.00 | 393750.00  |
|       |         |          |                                                                                                                                                                                                                                                | Grand Total |       |            | 2908454.61 |
|       |         |          |                                                                                                                                                                                                                                                | Say         |       |            | 29.08      |



सहायक अभियन्ता I  
निर्माण खण्ड, लो. वि. वि.  
राजीव



अविशाली अभियन्ता,  
निर्माण खण्ड, लो. वि. वि.,  
राजीव.

प्रमाणित  
बन प्रमाण अम्बोडा

प्रमाणित  
बन प्रमाण अम्बोडा

कार्य का नाम :- जनपद कलमोडा में बघेला-नाइ मोटर मार्ग का  
नवनिर्माण

(डम्पिंग भाग- )

खसरा नम्बरान बघेला

| क्र. सं. | भूमिधर का नाम      | खाता नं. | खेत नं० | कुल रकबा (हे.) | अर्जित रकबा (हे.) |
|----------|--------------------|----------|---------|----------------|-------------------|
| 1        | गोरी दत्त पुत्र    | 13       | 5211    | 0.028          | 0.028             |
|          | तारादत्त           |          | 5216    | 0.006          | 0.006             |
|          |                    |          | 5217    | 0.016          | 0.016             |
| 2        | कृपाशाम उर्फ केशव  | 6        | 885     | 0.046          | 0.046             |
|          | दत्त पुत्र करीदत्त |          | 887     | 0.059          | 0.059             |
|          |                    |          | 888     | 0.034          | 0.034             |
|          |                    |          | 889     | 0.028          | 0.028             |
|          |                    |          | 892     | 0.024          | 0.024             |
|          |                    |          | 883     | 0.091          | 0.091             |
| 3        | प्रकाश चण्ड पुत्र  | 36       | 5221    | 0.033          | 0.033             |
|          | गिरवाण दत्त        |          | 5222    | 0.009          | 0.009             |
| 4        | पूरनचण्ड पुत्र     | 38       | 1101    | 0.034          | 0.034             |
|          | राम दत्त           |          | 1108    | 0.018          | 0.018             |
|          |                    |          | 1107    | 0.081          | 0.081             |
|          |                    |          | 1105    | 0.010          | 0.010             |
|          |                    |          | 994     | 0.010          | 0.010             |
|          |                    |          | 995     | 0.004          | 0.004             |
|          |                    |          | 991     | 0.075          | 0.075             |
|          |                    |          | 992     | 0.064          | 0.064             |
|          |                    |          | 994     | 0.010          | 0.010             |

| क्र. सं. | भूमिधर का नाम                       | खाता नं. | खेत नं०        | कुल रकवा (हे.)   | अर्जित रकवा (हे.) |
|----------|-------------------------------------|----------|----------------|------------------|-------------------|
| 5        | पीताम्बर पुत्र<br>हीरावल्लभ         | 41       | 949            | 0.024            | 0.024             |
|          |                                     |          | <del>949</del> | <del>0.024</del> | <del>0.024</del>  |
|          |                                     |          | 948            | 0.018            | 0.018             |
|          |                                     |          | 952            | 0.051            | 0.051             |
|          |                                     |          | 946            | 0.024            | 0.024             |
|          |                                     |          | 945            | 0.010            | 0.010             |
| 6        | भूवनचंड पुत्र<br>जगन्नाथ            | 48       | 949 क          | 0.024            | 0.024             |
|          |                                     |          | 1001           | 0.059            | 0.059             |
|          |                                     |          | 944            | 0.014            | 0.014             |
|          |                                     |          | 943            | 0.006            | 0.006             |
| 7        | रामदत्त पुत्र<br>तिलोचन             | 54       | 1114           | 0.010            | 0.010             |
|          |                                     |          | 1106           | 0.023            | 0.023             |
|          |                                     |          | 5235           | 0.066            | 0.066             |
| 8        | राधाकिशन पुत्र<br>रामकिशन उर्फ रामा | 51       | 5223           | 0.021            | 0.021             |
|          |                                     |          | 5232           | 0.010            | 0.010             |
|          |                                     |          | 5233           | 0.011            | 0.011             |
|          |                                     |          | 5111           | 0.036            | 0.036             |
|          |                                     |          | 5109           | 0.036            | 0.036             |
|          |                                     |          | 5110           | 0.036            | 0.036             |
|          |                                     |          | 4908           | 0.023            | 0.023             |
|          |                                     |          |                |                  |                   |
|          | कुल योग                             |          | 39 न०          | 1.182            | 1.182             |

सेवा में - आदिशापी अभियन्ता लो. नि. वी. रानीखेत

प्रमाणित किया जाता है, कि शासन द्वारा स्वीकृत जनपद अल्मोड़ा में विकास खण्ड द्वाराहाट के अन्तर्गत द्वाराहाट सुरङ्गखेत मोटर मार्ग से वयैला नाड़ मोटर मार्ग का नव निर्माण 8 कि.मी. के निर्माण में जो मलुवा उत्पादित होगा उसका निष्कारण ग्राम सभा फल्दाडी की माप भुमी में किया जायेगा जिसमें किसी की भी किसी प्रकार की कोई आपत्तीय नहीं है,

अवधीप

विपिन चन्द्र पन्त  
प्रधान

ग्राम पंचायत फल्दाडी  
विखण्ड द्वाराहाट (अल्मोड़ा)

इस्लाहा ग्रामवासी नाड़ फल्दाडी

प्रकाश चन्द्र पन्त - *Ready*

जेशीधर (लोकाड़) पु. ह. प. वि. नि. रानीखेत

दीप चन्द्र पन्त

किशन पन्त

दिनेश चन्द्र पन्त *Dev*

रम चन्द्र पन्त

तारी राम

विशानराम

प्रेम राम

मदन मोहन पन्त

मन्मथ पन्त

चम्पा पन्त

*[Signature]*  
निरीक्षक/अधीक्षक पुलिस  
क्षेत्र ... *[Signature]*  
तहसील-द्वाराहाट

*[Signature]* 27/7/14  
तहसीलदार  
द्वाराहाट

# अनास्थापित प्रमाण पत्र

सेवा में

अधिकांशी अभियेता

लो० नि० वि० रानीरबेत

प्रमाणित किया जाता है कि शासन द्वारा खींचा जनपद-अलाहाबाद में विकास रण  
द्वाराहाट के अन्तर्गत द्वाराहाट सुदूरत मोटर मार्ग से बनेला, नह मोटर मार्ग का  
नव निर्माण ४ KM के निर्माण में जो मलुका उत्पादित होगा, इसका निस्तारण ग्राम सभा  
केयसा स्वयं फलदायी की नाप भी में किया जायेगा, जिससे किसी को भी किसी प्रकार  
की आपत्ति नहीं है,

- ① बबू पालेद
- ② प्रदीप पाण्डेय
- ③ चन्द्र प्रकाश
- ④ वासन्ता कुमारी
- ⑤ चन्दन शर्मा
- ⑥ धामी राम
- ⑦ पनी राम

- ⑧ पुष्पा देवी
- ⑨ गीता देवी
- ⑩ पुष्पा देवी

10/12/14  
उपनिरीक्षक राजस्व पुलिस  
क्षेत्र ...  
तहसील-द्वाराहाट

*[Signature]*

प्रधान  
ग्राम पंचायत बयेला  
पो0आर 0-0-रिया  
क्षेत्र पंचायत 0-0-0-0 (अल्मोडा)

*[Signature]*  
तहसीलदार  
द्वाराहाट

कार्य का नाम :- बयैला नाड मोटर मार्ग का नव निर्माण



Propose Area

© 2014 Google



सहायक सचिव  
मिड. ऑफ. नॉ. डि. वि.  
पानीपत

क. वि. नॉ. वि. वि.  
पानीपत

सहायक सचिव  
मिड. ऑफ. नॉ. डि. वि.  
पानीपत

सहायक सचिव  
मिड. ऑफ. नॉ. डि. वि.  
पानीपत