


Wildlife Management Plan and Soil Moisture Conservation Plan

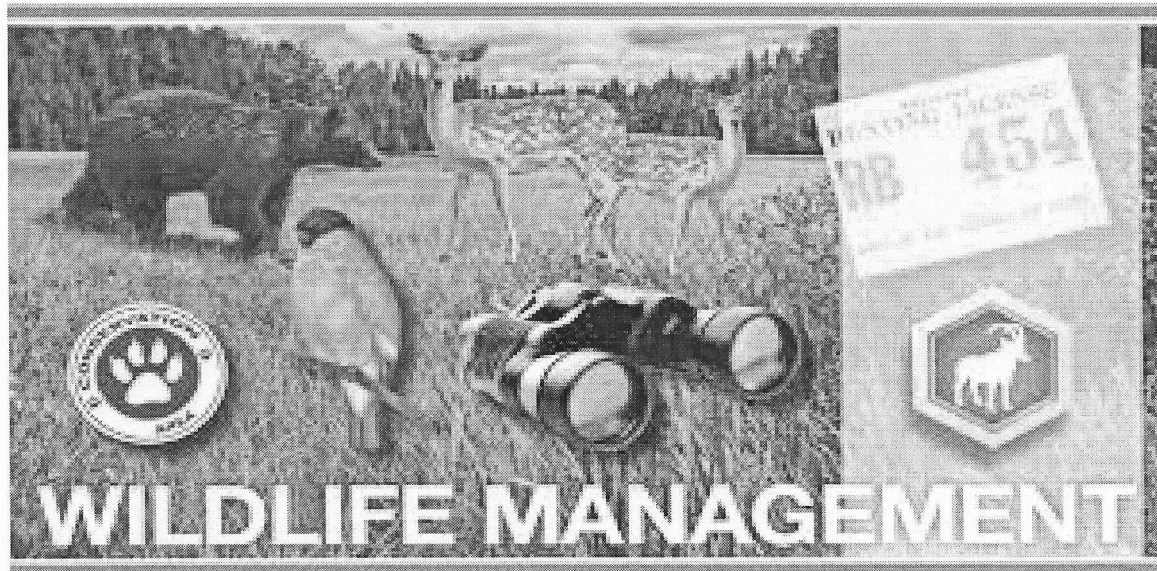

Proposal Name

जनपद चमोली में विधानसभा क्षेत्र थराली के अन्तर्गत नारायणबगड- किमोली मोटर मार्ग के किमी० ८.०० से नैणी मल्ली, मुसाउडयार बुंगा तक मोटर मार्ग के निर्माण हेतु ४.३४६ हे० वन भूमि का लोक निर्माण विभाग को हस्तान्तरण।

Distt.

Chamoli

Estimated cost (Lacs)

1.29

Estimated no. & date

Year

2023-24

Summary Of Estimated Cost

S.No.	ITEM	UNIT	SOR / DSR	QTY	RATE	AMOUNT
A	Wildlife Management Plan (2.00 %)					
1	Contour Trenches	meter	Department al	200.00	104.36	20872.00
2	Kala Bansa, Gajar Ghas, Lantana elimination	ha	Department al	4.00	Annexure	56729.16
3	Awareness Promotion		Ls	1.00	25000.00	25000.00
			Total			102601.16
			say in lacs			1.03
A	Soil Moisture Conservation Plan (SMC Work) (0.50 %)					
1	Construction of Chal khal	Cum	Pwd SOR	2.00	Annexure	25650.00
			Total			25650.00
			say in lacs			0.26

Rate Checked & Corrected

D/Man
Forest

C/S
प्रभागीय वनाधिकारी
बद्रीनाथ वन प्रभाग
बोपेश्वर

Bill of Qty.

Name of work :- चाल खाल निर्माण कार्य। (मृदा जल संरक्षण कार्य)

S. No	ITEM	UNIT	SOR / DSR	QTY	RATE	AMOUNT
1	Excavation for Structures Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material. Ordinary soil Upto 3 m depth	Cum	11-1-1-1 MORD	29.88	419.60	12537.65
2	Random Rubble Stone Masonry laid Dry, in breast walls, retaining walls, etc. including supply of all material, labour, T&P and royalties etc. complete as per drawing and technical specifications Clauses 702, 704, 1202 & 1203 of MORD Specification	Cum	1-3 MISS	3.87	2399.00	9284.13
			Total			21821.78
3	Add 18% GST					3927.92
			Total			25749.70
			say			25650.00

Rate Checked & Corrected

D/Man
Forest

प्रमोदीय वनाधिकारी
बद्रीनाथ वन प्रभाग
मोपेश्वर

चाल खाल निर्माण कार्य।

Name of work :-

Detail of Measurement

S. No.	Particulars of Item	Nos.			Length (m)	Width (m)	Height (m)	Quantity	Unit
1	Excavation for Structures Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material. Ordinary soil Upto 3 m depth								
		2	x	1	4.50	3.00	1.00	27.00	cum
	Drain	4	x	1	8.00	0.30	0.30	2.88	cum
							Total	29.88	cum
2	Random Rubble Stone Masonry laid Dry, in breast walls, retaining walls, etc. including supply of all material, labour, T&P and royalties etc. complete as per drawing and technical specifications Clauses 702, 704, 1202 & 1203 of MORD Specifiction								
		2	x	1	5.70	0.60	0.25	1.71	cum
		4	x	1	3.00	0.60	0.30	2.16	cum
							Total	3.87	cum

वन्यजीवों के विकास का प्रबन्धन योजना

बद्रीनाथ वन प्रभाग, गोपेश्वर चमोली।

क्र०स०	कार्य का विवरण	मात्रा	इकाई	दर	धनराशि (रु०)
0	1	2	3	4	5
A	लेटाना/कालाबास/गाजर घास झाड़ी				
प्रथम वर्ष					
1	लेटाना/कालाबास/गाजर घास झाड़ी को जड़ सहित उखाड़ना।	4.00	है०	9341.00	37364.00
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गद्दे में दबाकर अथवा जलाकर	4.00	है०	3132.00	12528.00
द्वितीय वर्ष					
1	लेटाना/कालाबास/गाजर घास झाड़ी को जड़ सहित उखाड़ना।(33 प्रतिशत)	0.52	है०	3082.00	1602.64
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गद्दे में दबाकर अथवा जलाकर	0.52	है०	1031.00	536.12
तृतीय वर्ष					
1	लेटाना/कालाबास/गाजर घास झाड़ी को जड़ सहित उखाड़ना। (10 प्रतिशत)	0.40	है०	934.00	373.60
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गद्दे में दबाकर अथवा जलाकर	0.40	है०	312.00	124.80
total (A)					52529.16
B	नमक आपूर्ति करना				
1	वन्यजीवों के कैलशियम आपूर्ति हेतु नमक क्रय करना।	140.00	कु०	30.00	4200.00
total (B)					4200.00
Total (A+B)					56729.16
Rate Checked & Corrected or say					56729.16

Rate Checked & Corrected

D/Man
Forest

प्रभागीय वन्यजीविकारी
बद्रीनाथ वन प्रभाग
गोपेश्वर