


Model plan related to Engineering Measures for Stabilization of muck dumping sites in Forest area for the construction of Road from Amlra nagar via Kharoti, Bhelan linking Hanga link road at Gathi Morh,


S.no	Particulars of Items	Quantity	Rate	Unit	Amount
1.	Earthwork in Excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.50m in width) and for shafts, wells, cesspits and the like not exceeding 10sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.50m, including getting out excavated and disposal of surplus excavated earth as directed. 40.0 x 0.60 x 1.40 = 33.60 cum	33.60cum	436.0	cum	14649.0
2.	Hand packing stone in wire crate, including cost of stone and excluding cost of crates. 40.0 x 1.20 x 1.20 = 57.60	57.60	616.40	cum	35504.00
3.	Supply of B.A wire crate size 20' x 4' x 4' mesh size 4" diameter of mesh 4mm including all lead lift and carriages.	7	5000	cum	35000.00
				Total	87153.0


Rate per metre = 2178.82 (sayRs. 2178/mtr)

Cost of crates 2no's of dumping zone in two layer=

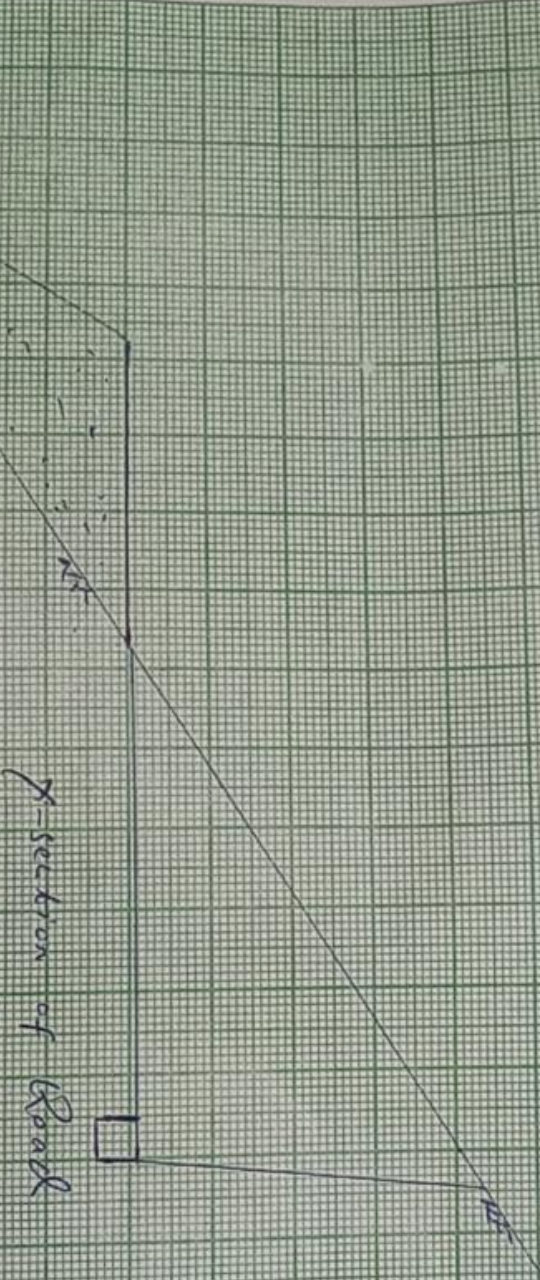
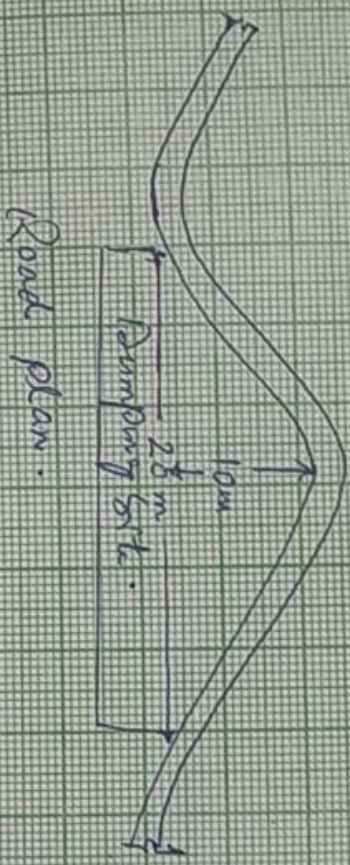
2 x 2 x 20m = 80m @ Rs. 2178/m = Rs. 174240.00

  
JUNIOR ENGINEER

  
ASSISTANT EXECUTIVE ENGINEER  
P.W.D. (R&B) HO Sub Division  
BHADERWAH

  
EXECUTIVE ENGINEER  
B.C. ROAD DIVISION  
Bhaderwah Chamba Road Division  
BHADERWAH

'PLAN/DRYDRAWS FOR THE CONSTRUCTION OF GRATE WALL FOR ROAD STABILIZATION IN DUMPING ZONE PROPOSED FOR CONSTRUCTION OF ROAD.'



Proposed of grate wall

*[Signature]*

Assistant Executive Engineer  
PWD (R&B) HQ Sub Division  
BHADERWAH

*[Signature]*

Executive Engineer  
PWD (R&B) HQ Sub Division  
BHADERWAH

*[Signature]*