

MUCK DISPOSAL DETAILS

STATION-1(1A Ch.17+180)

S.No	Length(m)	Breadth(m)	Height(m)	Area(sqm)	HECTARE	Volume	REMARKS
1	126.6868	120.0934	30	15214.24855	1.5214	456427	

STATION-2(1C Ch.00+040)

S.No	Length(m)	Breadth(m)	Height(m)	Area(sqm)	HECTARE	Volume	REMARKS
1	107.5602	95.0325	20	10221.71471	1.02217	204434	



Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
Total			17263	501444
0	115.306	0.010	0.000	0.000
5.112	133.054	0.000	0.025	634.752
10	145.734	0.000	0.000	683.833
20	171.086	0.000	0.000	1608.839
30	164.906	0.000	0.000	1729.341
35	154.476	0.000	0.000	829.344
40	138.712	0.000	0.000	765.761
45.112	118.375	0.000	0.000	690.675
50	96.695	0.000	0.000	554.236
55	74.057	0.476	1.080	449.436
60	51.277	0.662	2.584	329.043
65	34.571	0.756	3.219	224.843
70	24.454	0.015	1.748	154.898
75	16.813	0.008	0.051	109.192
80	1.966	5.780	14.866	49.893
85	1.706	0.729	16.758	9.157
90	4.558	0.294	2.716	15.048
95	9.610	0.104	1.087	34.636
100	14.480	0.000	0.283	59.270
105	17.965	0.000	0.000	80.005
110	23.051	0.000	0.000	101.496
115	28.366	0.000	0.000	127.666
120	33.820	0.000	0.000	154.772
125	39.076	0.000	0.000	181.373
130	44.249	0.000	0.000	206.897
135	49.630	0.000	0.000	232.444
140	66.253	0.000	0.000	285.091
145	77.351	1.330	3.626	346.910
150	70.737	9.137	28.370	349.479
150.725	72.487	8.472	6.919	48.431
155.363	84.027	4.231	31.856	339.589
160	95.846	1.085	13.262	394.262
165	111.406	0.001	2.908	496.361
170	133.656	0.000	0.003	593.864
180	171.537	0.000	0.000	1498.497
190	220.798	0.000	0.000	1950.970
190.725	225.569	0.000	0.000	161.880
200	258.390	0.000	0.000	2244.281
210	307.952	0.000	0.000	2831.709
220	295.778	0.000	0.000	3018.651
230	282.430	0.000	0.000	2891.041
230.018	282.421	0.000	0.000	5.109
240	284.601	0.000	0.000	2851.493
250	292.261	0.000	0.000	2947.903
250.745	292.662	0.000	0.000	224.262

Handwritten signature



Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
255	294.867	0.000	0.000	1291.018
260	286.348	0.000	0.000	1511.637
265.018	268.134	0.000	0.000	1461.401
270	259.064	0.000	0.000	1391.005
275	244.961	0.000	0.000	1342.551
280	208.084	0.113	0.260	1211.978
285	160.288	1.134	2.877	986.380
290	110.362	12.976	32.631	723.873
296.472	61.233	9.252	66.554	590.304
300	41.135	10.183	31.929	189.057
305	23.121	12.145	52.682	166.473
310	6.559	12.363	58.655	76.678
310.745	4.940	13.416	9.282	4.428
320	0.000	18.199	145.085	23.629
330	105.977	0.000	91.819	530.544
331.472	141.537	0.000	0.000	182.165
336.538	285.893	0.000	0.000	1082.604
340	343.516	0.000	0.000	1085.843
350	332.216	0.000	0.000	3317.640
355	349.783	0.000	0.000	1648.418
360	393.174	0.000	0.000	1787.549
365	442.014	0.000	0.000	2000.210
370	471.962	0.000	0.000	2177.176
375	479.908	0.000	0.000	2257.626
380	499.325	0.000	0.000	2325.286
381.538	507.031	0.000	0.000	738.524
385.769	502.859	0.000	0.000	2052.277
390	500.695	0.000	0.000	2065.633
395	476.465	0.000	0.000	2409.948
400	444.292	0.000	0.000	2295.089
405	389.805	0.000	0.000	2084.254
410	336.685	0.000	0.000	1802.755
415	287.175	0.000	0.000	1534.899
420	239.738	0.000	0.000	1285.015
423.32	209.537	0.000	0.000	722.493
426.641	180.208	0.000	0.000	623.645
430	151.743	0.000	0.000	535.775
435	114.923	0.000	0.000	641.449
440	83.230	0.000	0.000	478.013
445	58.531	0.000	0.000	342.439
450	39.675	0.297	0.799	237.406
455	33.681	0.026	0.868	178.352
460	32.733	0.013	0.102	162.890
470	36.826	0.000	0.066	344.984
471.641	36.988	0.000	0.000	60.560
477.963	25.197	0.286	0.905	196.571

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
480	19.289	0.000	0.291	45.336
490	10.296	2.298	11.340	148.626
496	10.580	5.391	22.660	63.409
500	17.422	3.251	16.916	56.915
507.963	40.242	1.872	19.831	235.775
510	49.651	0.016	1.858	94.384
520	168.259	0.000	0.078	1123.534
530	188.417	0.000	0.000	1831.228
540	160.600	0.000	0.000	1789.594
550	144.040	0.000	0.000	1573.095
551.416	143.469	0.000	0.000	211.218
560	131.066	0.000	0.000	1216.236
570	108.530	0.000	0.000	1222.035
580	78.839	3.149	15.703	944.134
581.416	74.858	3.193	4.492	108.844
590	56.845	9.607	54.935	565.245
600	68.392	2.135	58.708	626.184
610	39.216	0.004	10.697	538.038
616.817	25.490	13.333	45.465	220.563
620	27.366	16.520	47.356	84.263
630	28.512	5.029	106.697	281.908
636.817	28.075	5.606	35.269	196.447
640	26.690	6.110	18.069	89.168
650	26.734	7.448	65.546	273.389
652	24.542	8.280	15.176	52.547
660	46.666	9.103	66.865	292.020
670	104.833	0.000	43.640	773.526
680	168.803	0.000	0.000	1394.312
686.058	190.809	0.000	0.000	1109.532
690	204.754	0.000	0.000	792.681
700	237.091	0.000	0.000	2231.119
706.058	256.272	0.000	0.000	1494.323
710	266.534	0.000	0.000	1030.530
720	288.280	0.000	0.000	2774.068
730	305.795	0.000	0.000	2970.372
740	330.049	0.000	0.000	3179.221
750	364.898	0.000	0.000	3474.738
752.489	362.233	0.000	0.000	904.814
760	312.201	0.000	0.000	2545.639
770	186.807	0.000	0.000	2534.577
778.223	85.577	0.000	0.000	1149.390
780	65.388	0.000	0.000	137.976
787.489	34.094	0.271	0.976	382.184
790	35.392	0.005	0.333	89.605
800	40.796	0.006	0.050	392.482
810	25.329	0.020	0.122	339.681



Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
820	45.614	1.630	7.949	364.643
830	191.959	0.000	7.854	1226.966
840	366.489	0.000	0.000	2905.293
848.958	500.346	0.000	0.000	4063.186
850	509.146	0.000	0.000	550.626
858.223	533.114	0.000	0.000	4441.208
860	529.021	0.000	0.000	967.640
870	444.608	0.000	0.000	4953.746
880	335.986	0.000	0.000	3930.250
883.958	318.718	0.000	0.000	1295.660
890	297.866	0.000	0.000	1862.699
900	254.897	0.000	0.000	2763.817
905.351	243.924	0.000	0.000	1334.497
910	236.434	0.000	0.000	1114.745
920	218.524	0.000	0.000	2258.111
930	193.962	0.000	0.000	2030.792
940	178.209	0.000	0.000	1816.705
945.351	173.640	0.000	0.000	913.014
950	165.327	0.000	0.000	762.734
955	159.601	0.000	0.000	786.184
960	156.049	0.000	0.000	763.858
965	159.971	0.000	0.000	764.418
970	164.481	0.000	0.000	783.823
975	171.291	0.000	0.000	810.426
980	165.737	0.000	0.000	813.001
985	161.379	0.000	0.000	788.716
990	161.295	0.000	0.000	777.455
999.33	172.993	0.000	0.000	1499.978
1000	174.180	0.000	0.000	111.795
1005	185.203	0.000	0.000	865.348
1010	198.673	0.000	0.000	928.234
1020	199.741	0.000	0.000	1937.494
1030	187.540	1.052	5.322	1899.266
1039.33	174.880	3.151	19.608	1690.628
1040	174.320	3.283	2.156	117.038
1050	167.446	3.643	34.628	1708.829
1060	158.981	2.041	28.421	1632.135
1070	144.125	1.284	16.623	1515.530
1080	107.842	1.221	12.524	1259.833
1090	98.166	0.420	8.208	1030.040
1091.316	99.918	0.341	0.501	130.331
1100	113.573	0.030	1.611	930.536
1110	111.625	0.055	0.420	1139.309
1116.316	103.099	0.255	0.951	691.202
1120	97.439	0.623	1.568	377.748
1130	89.671	3.307	19.076	958.105

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
1140	154.090	0.000	16.055	1249.684
1148.507	228.397	0.000	0.000	1668.356
1150	241.548	0.000	0.000	359.747
1160	318.650	0.000	0.000	2871.857
1170	334.293	0.000	0.000	3337.771
1180	340.737	0.000	0.000	3431.069
1190	294.729	0.000	0.000	3209.168
1200	220.021	0.000	0.000	2584.882
1210	124.270	0.000	0.000	1725.823
1220	109.796	0.000	0.000	1175.981
1228.507	140.989	0.000	0.000	1074.723
1230	143.703	0.000	0.000	214.375
1240	138.257	0.000	0.000	1422.094
1250	106.650	0.000	0.000	1234.863
1260	76.356	0.000	0.000	923.071
1260.699	74.311	0.000	0.000	53.102
1270	23.562	1.998	9.131	459.631
1280	12.515	24.671	132.698	182.151
1285.699	16.294	16.025	115.956	82.084
1290	28.892	6.182	47.761	97.183
1300	70.346	0.542	33.619	496.192
1310	74.611	0.231	3.867	724.784
1320	75.787	0.000	1.157	751.986
1330	101.083	0.000	0.000	884.347
1340	113.323	0.000	0.000	1072.028
1350	106.436	0.000	0.000	1098.796
1360	119.743	0.000	0.000	1130.898
1370	148.951	0.000	0.000	1343.473
1380	164.078	0.000	0.000	1565.146
1390	174.741	0.000	0.000	1694.092
1398.477	180.241	0.000	0.000	1504.572
1400	181.630	0.000	0.000	275.583
1410	178.018	0.000	0.000	1798.240
1420	169.214	0.000	0.000	1736.159
1420.054	169.190	0.000	0.000	9.216
1430	149.167	0.000	0.000	1585.333
1440	119.964	0.000	0.000	1350.333
1450	83.832	0.000	0.000	1022.671
1455	64.185	0.000	0.000	370.796
1460	43.176	0.000	0.000	268.152
1465.054	14.009	0.367	0.978	143.093
1470	0.725	14.910	36.961	35.513
1475	2.794	18.612	81.173	9.241
1480	17.719	8.756	65.591	53.212
1485	35.661	0.000	20.819	136.188
1490	43.051	0.000	0.000	199.088

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
1495	47.420	0.000	0.000	228.822
1498.477	47.555	0.000	0.000	167.485
1500	47.892	0.008	0.006	73.893
1505	46.322	0.363	0.872	240.044
1510	41.926	2.657	7.126	225.970
1515	34.563	5.942	20.384	197.074
1520	24.468	7.082	30.963	153.143
1525	15.281	8.906	38.077	103.559
1530	12.736	9.592	44.106	72.995
1531.899	14.813	8.086	16.011	27.253
1540	18.134	4.276	47.813	138.136
1550	13.985	6.155	50.396	165.001
1560	8.069	11.838	88.140	112.594
1570	6.922	12.840	122.022	75.855
1576.899	7.285	10.681	81.141	49.009
1580	6.686	10.709	33.161	21.659
1590	6.473	11.838	112.733	65.794
1598.477	9.623	6.669	78.442	68.220
1600	9.741	6.486	10.019	14.746
1610	32.821	0.061	32.735	212.811
1620	40.533	0.004	0.322	366.770
1626.366	46.678	0.007	0.033	277.584
1630	51.458	0.007	0.025	178.480
1640	63.949	0.000	0.035	579.310
1650	94.199	0.000	0.000	795.131
1651.366	96.442	0.000	0.000	130.883
1660	96.891	0.000	0.000	839.121
1670	89.814	0.000	0.000	939.315
1680	77.112	0.000	0.000	840.353
1690	66.755	0.000	0.000	724.342
1700	55.518	0.000	0.000	615.107
1710	98.423	0.000	0.000	776.764
1712.625	106.166	0.000	0.000	271.836
1720	110.106	0.000	0.000	807.147
1730	99.705	0.000	0.000	1057.500
1737.625	80.941	0.000	0.000	688.669
1740	74.520	0.000	0.000	184.648
1750	51.298	0.000	0.000	629.089
1755.884	53.041	0.000	0.000	306.979
1760	57.095	0.000	0.000	226.497
1770	65.865	0.000	0.000	613.395
1780	54.372	0.000	0.000	598.609
1790	35.889	0.000	0.000	447.340
1795	37.677	0.000	0.000	181.160
1800	46.678	0.000	0.000	207.300
1800.884	48.045	0.000	0.000	41.129

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
1810	61.669	0.000	0.000	488.219
1815	73.028	0.000	0.000	325.789
1820	97.222	0.003	0.008	410.075
1825	130.682	0.000	0.008	549.916
1830	170.440	0.000	0.000	728.590
1835	188.335	0.000	0.000	867.861
1840	171.330	0.000	0.000	868.170
1845	148.666	0.000	0.000	772.577
1850	131.476	0.000	0.000	677.812
1855	118.272	0.000	0.000	605.293
1860	102.670	0.000	0.000	536.578
1865	87.909	0.000	0.000	464.081
1870	79.989	0.000	0.000	410.144
1875	78.255	0.000	0.000	387.405
1880	70.041	0.000	0.000	363.243
1885	61.856	0.000	0.000	322.866
1890	58.468	0.000	0.000	293.901
1895	55.741	0.000	0.000	278.444
1900	52.131	0.091	0.245	262.902
1905	60.952	0.000	0.245	275.585
1910	66.635	1.464	4.004	310.434
1915	69.963	1.102	7.018	330.984
1920	77.557	0.000	3.014	355.425
1925	132.294	0.000	0.000	511.132
1930	174.482	0.000	0.000	752.586
1935	186.007	0.000	0.000	883.242
1940	203.883	0.000	0.000	952.309
1944.908	271.045	0.000	0.000	1142.419
1949.816	324.500	0.000	0.000	1437.538
1950	326.586	0.000	0.000	58.882
1955	383.504	0.000	0.000	1746.170
1960	447.668	0.000	0.000	2054.993
1970	463.961	0.000	0.000	4544.454
1980	384.001	0.000	0.000	4241.784
1990	301.805	0.000	0.000	3429.090
1994.816	255.182	0.000	0.000	1341.227
2000	190.096	0.000	0.000	1154.158
2010	83.500	0.000	0.000	1367.980
2020	18.842	5.709	28.546	511.710
2030	19.236	6.751	62.303	190.391
2040	21.092	1.659	42.051	201.642
2050	4.753	18.007	98.328	129.225
2060	6.558	14.568	162.873	56.554
2068.157	13.169	9.394	97.733	80.460
2070	24.418	81.519	83.767	34.633
2080	74.249	93.492	875.053	493.335

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
2090	121.892	0.000	467.458	980.700
2100	155.186	0.000	0.000	1385.389
2110	173.816	0.000	0.000	1645.011
2120	143.184	0.000	0.000	1584.997
2128.157	140.641	0.000	0.000	1157.608
2130	144.911	0.000	0.000	263.108
2140	171.897	0.000	0.000	1584.041
2150	158.251	0.000	0.000	1650.742
2160	170.674	0.000	0.000	1644.626
2170	189.937	0.000	0.000	1803.054
2180	201.439	0.000	0.000	1956.878
2190	202.493	0.000	0.000	2019.658
2200	210.699	0.000	0.000	2065.962
2205.118	232.178	0.000	0.000	1133.389
2210	207.732	0.000	0.000	1070.299
2220	168.266	0.141	0.716	1854.278
2225	150.938	0.989	2.890	777.468
2225.118	152.551	1.011	0.121	17.410
2230	137.385	0.697	4.267	686.003
2240	138.263	0.000	3.570	1338.361
2250	128.857	0.000	0.002	1301.918
2260	136.638	0.000	0.000	1299.258
2270	157.364	0.000	0.000	1442.973
2280	159.227	0.000	0.000	1555.927
2290	146.566	0.000	0.000	1504.477
2290.009	146.572	0.000	0.000	1.295
2300	141.092	0.000	0.000	1420.682
2310	128.238	0.000	0.000	1341.541
2310.009	128.222	0.000	0.000	1.151
2320	113.511	0.000	0.000	1207.578
2330	96.537	0.000	0.000	1050.239
2330.131	96.278	0.000	0.000	12.585
2340	76.763	0.000	0.000	856.535
2350	62.090	0.000	0.000	701.152
2360	47.446	5.142	23.360	556.834
2370	28.929	0.491	25.702	391.005
2370.131	28.669	0.512	0.062	3.869
2380	14.920	4.182	22.236	221.676
2390	4.790	9.202	64.592	101.972
2400	13.215	1.448	51.387	92.553
2410	30.547	0.000	6.881	220.248
2418.496	68.224	0.000	0.000	419.068
2420	75.658	0.000	0.000	108.060
2430	142.994	0.000	0.000	1088.641
2440	212.340	0.000	0.000	1766.132
2450	265.292	0.000	0.000	2378.450

Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
2458.496	179.546	0.000	0.000	1889.648
2460	162.051	0.000	0.000	256.899
2470	140.512	0.000	0.000	1512.816
2480	105.676	0.000	0.000	1230.943
2490	48.504	13.583	67.916	770.903
2500	28.463	15.918	147.504	384.835
2510	36.364	11.153	135.355	324.134
2520	48.492	4.652	79.025	424.278
2530	63.472	1.394	30.228	559.820
2540	80.988	0.046	7.197	722.300
2550	97.693	0.024	0.348	893.405
2560	113.416	0.000	0.120	1055.545
2570	128.975	0.000	0.000	1211.953
2580	145.079	0.000	0.000	1370.266
2590	163.612	0.000	0.000	1543.453
2593.422	170.603	0.000	0.000	571.762
2600	183.533	0.000	0.000	1161.878
2610	204.003	0.000	0.000	1920.380
2620	229.840	0.000	0.000	2132.641
2623.422	240.541	0.000	0.000	786.878
2630	264.744	0.000	0.000	1622.064
2640	291.043	0.000	0.000	2707.274
2650	264.506	0.000	0.000	2700.041
2660	232.084	0.000	0.000	2411.568
2670	221.487	0.000	0.000	2204.200
2671.933	220.964	0.000	0.000	415.849
2680	220.217	0.000	0.000	1737.533
2690	223.437	0.000	0.000	2185.355
2700	214.033	0.000	0.000	2174.679
2701.933	208.108	0.000	0.000	408.017
2710	172.065	0.000	0.000	1533.411
2720	137.306	0.000	0.000	1546.854
2725.9	107.434	0.000	0.000	722.029
2730	86.901	0.000	0.000	398.789
2740	47.048	0.042	0.205	672.989
2750	28.511	5.873	28.784	382.937
2760	30.318	3.740	46.531	301.002
2765	25.065	3.366	17.003	142.103
2770	16.307	3.532	16.400	106.450
2770.9	14.348	3.637	3.059	14.258
2780	1.957	16.459	87.711	76.855
2785	7.431	9.826	63.059	24.499
2790	14.170	5.459	36.478	56.176
2795	20.864	1.913	17.531	90.792
2800	29.688	0.336	5.322	130.467
2805	38.225	0.025	0.852	174.657



M. J. P. Pally


Segment 1B - Earthwork Quantities		Volume (C
-----------------------------------	--	-----------

Segment 1B - Earthwork Quantities				
Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut Total
2810	45.259	0.232	0.607	214.208
2813.789	49.374	0.064	0.530	183.797
2820	53.746	0.011	0.221	327.666
2825	58.274	0.000	0.026	285.715
2830	71.555	0.000	0.000	330.115
2840	105.390	0.000	0.000	895.203
2850	128.419	0.000	0.000	1176.801
2858.789	126.271	0.000	0.000	1119.223
2860	125.853	0.000	0.000	152.675
2870	120.947	0.000	0.000	1233.998
2875.738	115.105	0.000	0.000	677.262
2880	110.673	0.000	0.000	481.764
2890	100.228	0.000	0.000	1060.937
2900	92.032	0.039	0.191	974.454
2910	87.884	0.008	0.228	918.961
2915.738	80.820	0.001	0.023	497.315
2920	73.366	0.153	0.312	338.409
2930	50.465	2.772	13.980	638.377
2937	60.532	7.944	35.920	402.553
2940	68.972	6.708	21.042	201.919
2949.896	103.976	0.034	31.904	886.400
2950	104.334	0.023	0.003	11.207
2960	133.918	0.000	0.107	1224.950
2970	163.397	0.000	0.000	1517.065
2980	185.368	0.000	0.000	1765.866
2989.896	207.678	0.000	0.000	1944.768
2990	207.715	0.000	0.000	21.626
3000	195.378	0.000	0.000	2015.469
3009.233	170.786	0.000	0.000	1690.471
3010	169.372	0.000	0.000	130.325
3020	152.327	0.000	0.000	1597.746
3030	141.774	0.000	0.000	1441.207
3035	140.568	0.000	0.000	684.016
3040	142.947	0.000	0.000	681.476
3045	149.642	0.000	0.000	697.761
3050	161.447	0.000	0.000	736.247
3054.233	175.972	0.000	0.000	671.699
3060	203.549	0.000	0.000	1026.497
3065	234.977	0.000	0.000	1029.408
3070	273.208	0.000	0.000	1195.800
3075	317.093	0.000	0.000	1397.391
3080	363.192	0.000	0.000	1626.613
3085	405.835	0.000	0.000	1860.827
3090	433.054	0.000	0.000	2051.392
3095	370.331	0.000	0.000	1974.074
3100	313.391	0.000	0.000	1682.909



Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
3104.288	265.596	0.000	0.000	1220.536
3108.576	210.709	0.000	0.000	997.948
3110	192.983	0.000	0.000	279.701
3115	139.707	0.000	0.000	808.911
3120	99.122	0.000	0.000	580.144
3125	69.438	0.000	0.000	409.270
3130	71.792	0.025	0.065	339.682
3135	64.547	2.124	5.566	326.172
3140	55.500	3.407	14.236	289.964
3150	46.476	2.656	30.839	500.500
3153.576	50.545	1.699	7.787	173.491
3160	59.889	0.609	7.414	354.696
3170	75.704	265.153	1328.812	677.964
3180	87.820	0.000	1325.766	817.617
3190	91.046	0.000	0.000	894.327
3200	92.018	0.000	0.000	915.320
3210	88.822	0.000	0.000	904.201
3220	88.636	0.000	0.000	887.290
3230	89.558	0.000	0.000	890.972
3240	80.274	0.000	0.000	849.160
3250	57.371	0.000	0.000	688.225
3260	38.421	0.026	0.131	478.961
3265	35.516	0.336	0.906	184.842
3270	34.235	0.574	2.275	174.376
3280	40.218	0.380	4.769	372.264
3290	38.522	0.493	4.363	393.701
3300	33.277	1.141	8.167	358.995
3310	34.758	0.321	7.309	340.172
3313.498	37.768	0.060	0.666	126.832
3320	75.771	0.027	0.281	370.567
3330	129.176	650.528	2850.938	1040.292
3333.498	136.148	584.873	1867.466	474.240
3340	122.475	0.000	1618.138	858.689
3350	138.660	0.000	0.000	1327.371
3360	73.124	0.000	0.000	1072.917
3370	38.940	0.000	0.000	565.559
3380	23.509	3.070	15.096	315.674
3390	46.921	0.589	17.987	358.197
3394.857	55.832	0.094	1.628	253.783
3400	54.127	0.000	0.237	286.703
3410	61.429	0.000	0.000	581.537
3414.857	88.993	0.000	0.000	365.302
3420	123.682	0.000	0.000	546.892
3430	231.750	0.000	0.000	1777.161
3440	297.992	0.000	0.000	2648.711
3450	266.725	0.000	0.000	2823.585



H. S. Gupta


Segment 1B - Earthwork Quantities

Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
3460	230.408	0.000	0.000	2485.666
3470	265.988	0.000	0.000	2481.983
3480	332.917	0.000	0.000	2994.524
3490	289.597	0.000	0.000	3112.566
3500	228.153	0.000	0.000	2588.747
3510	149.336	0.000	0.000	1887.445
3520	80.299	0.000	0.000	1148.174
3530	51.293	0.000	0.000	657.957
3540	31.367	0.033	0.167	413.301
3540.271	30.913	0.007	0.005	8.437
3550	25.670	0.453	2.266	274.497
3560	27.841	0.672	5.736	264.861
3570	36.731	1.994	13.771	315.418
3575	35.540	2.929	12.789	174.615
3580	34.415	3.443	16.632	167.876
3580.271	34.386	3.473	0.981	8.917
3585.135	34.679	3.386	17.465	160.738
3590	37.866	2.512	15.025	168.919
3595	43.232	1.475	10.450	194.152
3600	50.189	0.521	5.237	223.795
3602.971	55.395	0.136	1.025	150.425
3610	71.845	183.278	889.745	431.504
3620	107.061	0.000	1265.114	872.712
3630	148.665	0.000	0.000	1259.586
3640	197.113	0.000	0.000	1718.098
3642.971	207.851	0.000	0.000	601.583
3646.246	214.030	0.000	0.000	690.863
3650	200.235	0.000	0.000	777.533
3658.96	147.580	0.000	0.000	1558.180
3660	137.445	0.000	0.000	148.273
3670	120.760	0.000	0.000	1292.979
3680	108.670	0.000	0.000	1145.868
3685	96.368	0.000	0.000	508.237
3690	82.005	0.000	0.000	439.734
3695	73.399	0.000	0.000	382.200
3700	67.531	0.000	0.000	346.566
3703.96	53.892	0.000	0.000	235.048
3710	47.083	0.000	0.000	294.836
3715	45.068	0.000	0.000	222.490
3720	46.843	0.000	0.000	223.736
3725	45.025	0.000	0.000	224.954
3730	54.820	0.000	0.000	241.648
3734.266	59.527	0.000	0.000	232.294
3738.533	66.688	0.000	0.000	253.264
3740	68.591	0.000	0.000	92.655
3745	81.941	0.000	0.000	350.745

Segment 1B - Earthwork Quantities				
Chainage	Area (Sqm)		Volume (Cum)	
	Cut	Fill	Fill	Cut
				Total
3750	82.307	0.000	0.000	383.257
3753.386	77.490	0.000	0.000	254.069
3755	74.913	0.000	0.000	116.384
3760	54.144	0.000	0.000	308.179
3765	34.824	0.000	0.000	216.157
3770	24.581	0.083	0.213	146.514
3780	17.440	0.000	0.425	208.874
3783.533	14.853	0.000	0.000	57.037
3790	10.971	0.146	0.472	83.508
3796.246	7.457	0.123	0.840	57.552
3800	8.403	0.046	0.317	29.767
3810	8.001	1.287	6.665	82.019
3818.528	15.243	0.000	5.489	99.115

Principal

STATION-1
 MUCK DISPOSAL AREA
 SEGMENT 1A CH 17+180
 LENGTH=216.00 M
 WIDTH =70.445 M
 HEIGHT=30.00 M
 HECTARE=1.521

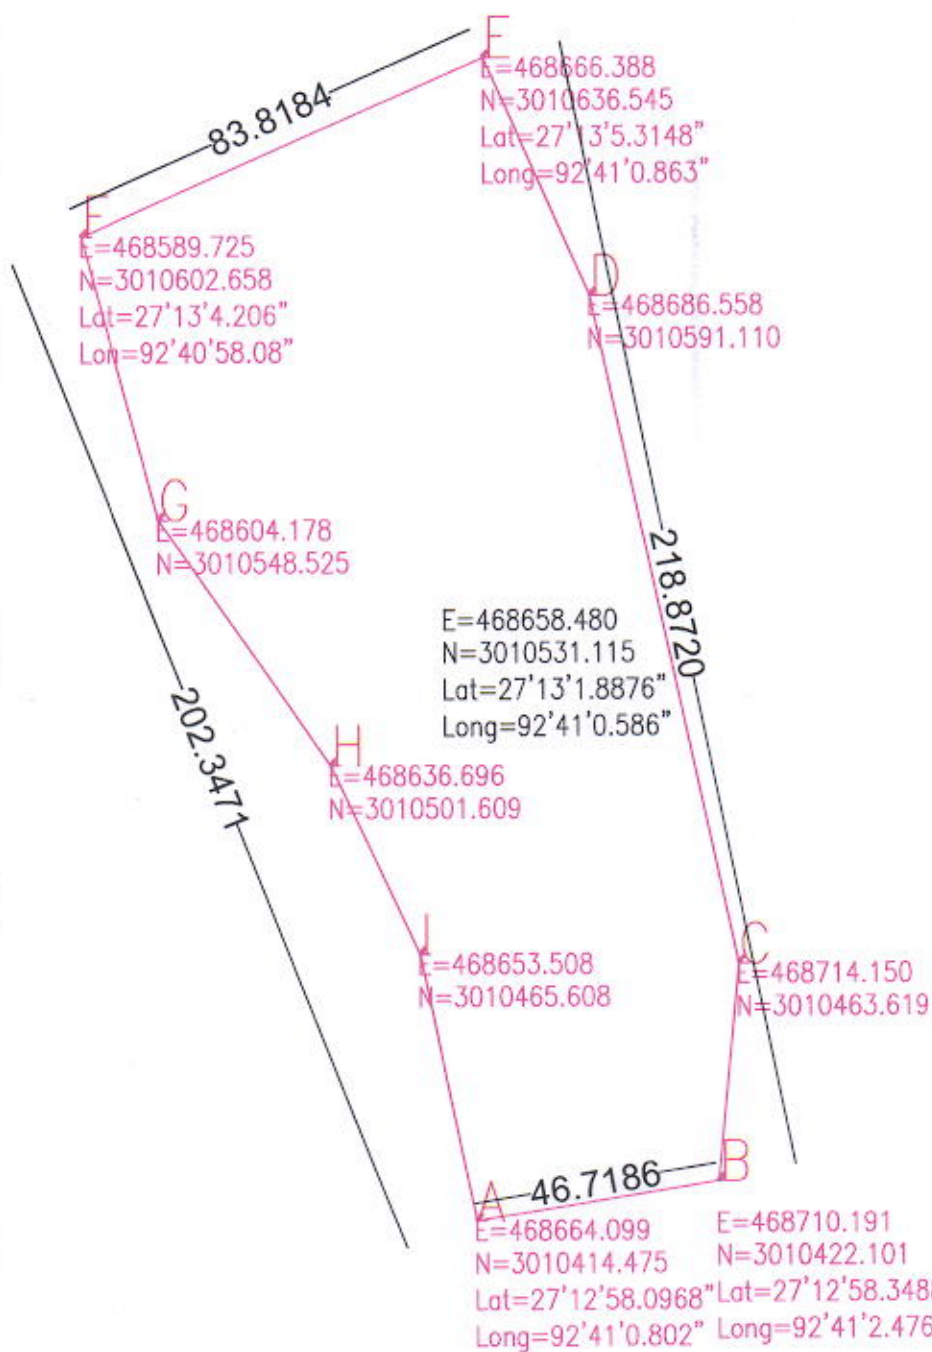

STATION-2
MUCK DISPOSAL AREA
SEGMENT 1C CH 0+040
LENGTH=107.56 M
WIDTH =97.03 M
HEIGHT=20.00 M
HECTARE=1.0222

