

कार्यालय अधिशासी अभियन्ता,
निर्माण खण्ड, लोक निर्माण विभाग, रानीखेत

दूरभाष :- 05966-220035 फैक्स :- 05966-220035 ई-मेल cdpwdrkt@gmail.com
पत्रांक 1157 /18सी. दिनांक, रानीखेत, 19-5-2016

सेवा में,

प्रभागीय वनाधिकारी, अल्मोड़ा
वन प्रभाग, अल्मोड़ा।

विषय :- बयेला नाड मोटर मार्ग के वन भूमि हस्तान्तरण के सम्बन्ध में। (प्रस्ताव सं. 9364/2015)

संदर्भ :- आपका पत्रांक मेमो/12-1 दिनांक 19.3.2016


उपरोक्त विषयक संदर्भित पत्र के क्रम में आपको अवगत कराना है कि आप द्वारा उपरोक्त मोटर मार्ग के वन भूमि हस्तान्तरण प्रस्ताव में आन लाईन द्वारा आपत्तियों में लौटाया गया था। जिसकी आख्या विन्दुवार निम्नवत है:-

1	The Period for Which forest Land is proposed to be diverted is not mentioned in para A- 1-X	Mentioned in Para A-1-X
2	Village wise Breakup of land not provided in para -2,3	Village wise breakup provided
3	Both the alternatives start form the same point but, they are stated to start form different points in the text.	Both the alignments/alternatives start from the same point with minor variations because there was no alternative and it is corrected in the statement.
4	Scanned copy of map of land proposed for CA using GPS or total station is not proper	Proper scanned copy of map of land proposed for CA using GPS is attached
5	Copy of map in SOI toposheet indicating location of CA is not clear.	Clear SOI toposheet duly signed by forest and revenue officers is enclosed.
6	Owner wise details of nap land selected for muck dumping along with map and reclamation plan is not submitted.	Owner wise detail of nap land selected for dumping along with map and reclamation plan is attached
7	Working Plan prescription for the area proposed for diversion and its distance from boundary of forest not given	


(संजय प्रसाद सिन्हा)

अधिशासी अभियन्ता,
निर्माण खण्ड, लोक निर्माण विभाग,
रानीखेत

कार्य का नाम :- बयेला नाड मोटर मार्ग के निर्माण हेतु क्षतिपूरक वृक्षारोपण हेतु
चयनित स्थल

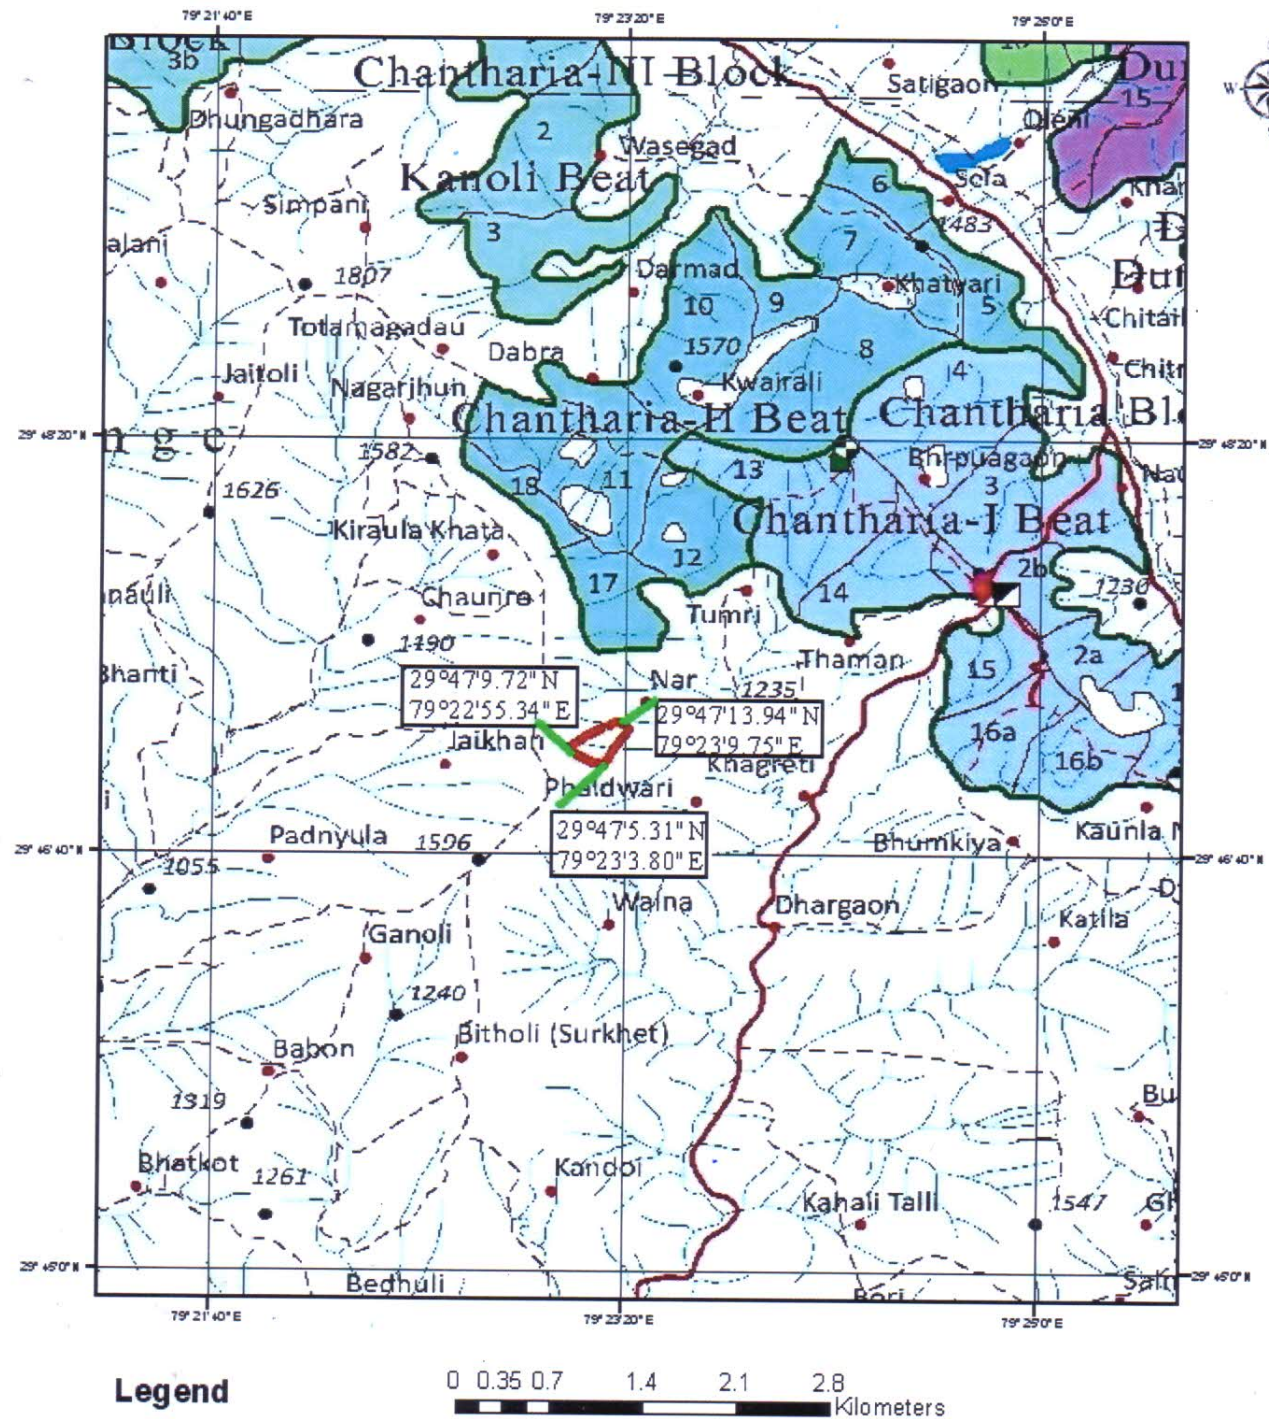


अधिकासी अभियन्ता,
निर्माण खाण्ड, लाओनो विभाग,
राजीवगंज (अल्मोड़ा)

अधिकासी अभियन्ता,
निर्माण खाण्ड, लाओनो विभाग,
राजीवगंज (अल्मोड़ा)

Toposheet

कार्य का नाम :- बरोला जाड मोटर मार्ग के निर्माण हेतु क्षतिपूर्क वृक्षारोपण हेतु
चयनित स्थल

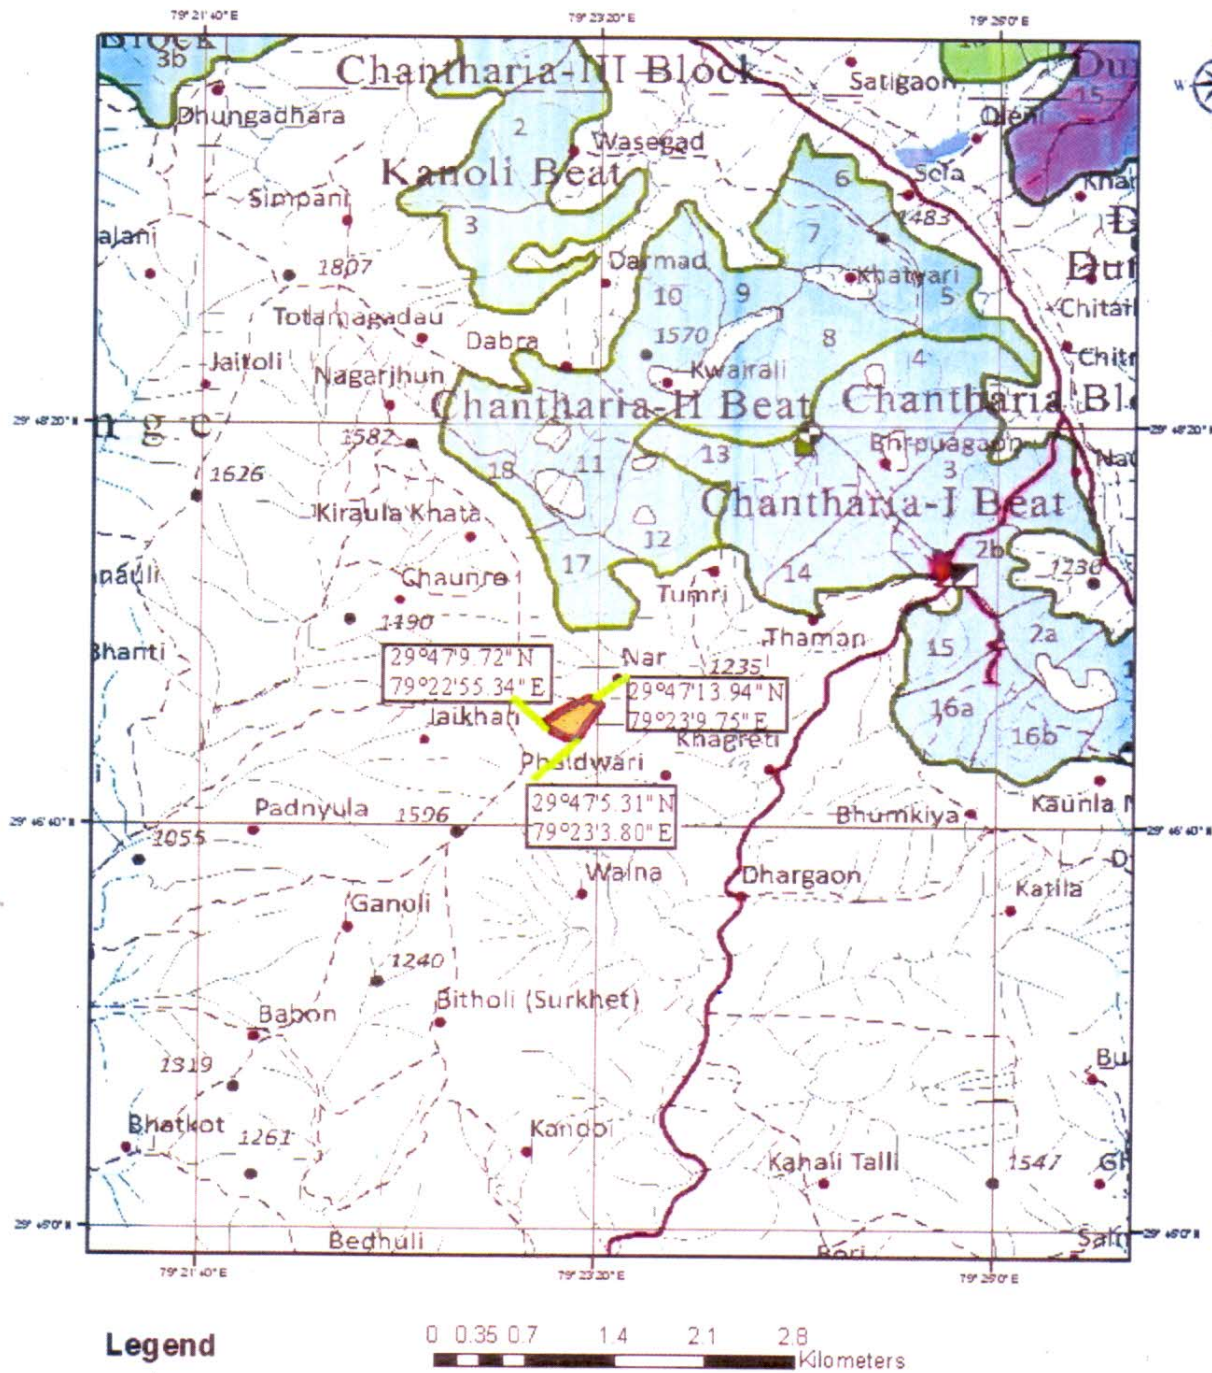

अधिकांश क्षेत्रों में
जंगल काटने से
जंगल काटने से
जंगल काटने से

अधिकांश क्षेत्रों में
जंगल काटने से
जंगल काटने से
जंगल काटने से

मलुवे के निस्तारण का प्राक्कलन

परियोजना का नाम :- द्वाराहाट सुरईखेत मोटर मार्ग से वयेला-नाड़ मोटर मार्ग का नव निर्माण (लम्बाई 8.00 किमी०)।

S.No	Item of work	No	Length	Width	Height	Qty	Unit
A	कटिंग कार्य से निकले मलुवे की मात्रा						
		1x8x1/2	1000.00	6.00	2.75	66000.00	
	Swelling factor 30%					19800.00	
					Total	85800.00	Cum.
B	निर्माण कार्य में प्रयुक्त मलुवे की मात्रा						
1	Retaining Walls	1x8	250.00	(2.50+0.6)/2	4.00	12400.00	
2	Breast Walls	1x8	150.00	(0.90+0.60)/2	1.50	1350.00	
3	H.P. Stone Filling	1x8x1/2	2.50	0.90	4.00	36.00	
4	Constt. Of scupper	1x8x5		37.09		1483.60	
5	Soling Works	1x8	1000.00	4.05	0.12	3888.00	
6	Constt. Of pucca Drain	1x8	200.00	0.60	0.60	576.00	
					Total	19733.60	Cum.
C	सतह निर्माण में प्रयुक्त मलुवे की मात्रा						
1	Road Constt. In Filling	1x8x12	25.00	6.00	0.70	10080.00	
2	Making Subgrade and superelevation	1x8	1000.00	6.0x(0.00+0.30)/2		7200.00	
3	Stacking for pattri/rut Filling	2x8	1000.00	1.00	0.50	8000.00	
					Total	25280.00	Cum.
D	निर्माण के दौरान क्षति						
1	During Construction (By excavator and Tipper	1x8x1/2	1000.00	2.25	1.16	10440.00	
					Total	10440.00	Cum.
2	Natural Diposal due to Rain and steep slope L.S. 15 %					12870.00	
	Total Quantity			(B+C+D+2)		68323.60	
	Balanced Quantity for reuired disposal					17476.40	Cum.

J.E.

अध्यापक अभियन्ता II
निर्माण खण्ड, लो० नि० वि०
बनारस

अध्यापक अभियन्ता
निर्माण खण्ड, लो० नि० वि०
बनारस

BILL OF QUANTITY

of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (Length 8.0

Construction of Dumping Yard

S. No	Unq. ID	Ref. no	Item of work	Qty	Unit	Rate	Amount Rs.
1	2	3	4	3	4	5	7
1	75476	16-1	Excavation in foundation for retaining & breast walls in all types of soils and rocks including lead, lift and disposal of surplus material as per direction of engineer - in - charge	1312.50	Cum.	234.80	308175.00
2	75486	16-9-2-1	Providing and laying of wire crates 3.00x1.50x1.50 in size with a 10 gauge BWG GI wire conforming to IS: 280 & IS:4826 in 150mm x 150mm mesh laid with stone boulders weighing not less than 25 kg each.(As per PWD Uttarakhand Specification)	2646.00	Cum.	739.92	1957828.32
3	75481	16-6	Random Rubble stone masonry in Coolie walling including supply of all material, labour, T&P etc. required for proper completion of the work.(As per PWD Uttarakhand specifications)	360.47	Cum.	689.94	248701.29
4			Rate of Unirrigated Nap land	0.35	Hect.	1125000.00	393750.00
				Grand Total			2908454.61
				Say			29.08

[Signature]

सहायक अभियन्ता I
निर्माण खण्ड, लो. नि. वि. वि.
राजीव

[Signature]

अविशाखी अभियन्ता,
निर्माण खण्ड, लो. नि. वि. वि.,
राजीव.

[Signature]
प्रशासीक वन प्रभाग उत्तराखण्ड

[Signature]
प्रशासीक वन प्रभाग उत्तराखण्ड

कार्य का नाम :- जनपद कुल्लुआ में जखेला-नाइ मोटर मार्ग का
नवनिर्माण

(डम्पिंग भाग-)

खसरा नम्बरान जखेला

क्र. सं.	भूमिधर का नाम	खाता नं.	खेत नं०	कुल रकबा (हे.)	अर्जित रकबा (हे.)
1	गोरी दत्त पुत्र	13	5211	0.028	0.028
	ताशदत्त		5216	0.006	0.006
			5217	0.016	0.016
2	कृपाशंकर उर्फ केशव	6	885	0.046	0.046
	दत्त पुत्र हरीदत्त		887	0.059	0.059
			888	0.034	0.034
			889	0.028	0.028
			892	0.024	0.024
			883	0.091	0.091
3	प्रकाश चण्डे पुत्र	36	5221	0.033	0.033
	गिरवाण दत्त		5222	0.009	0.009
4	पूरनचण्डे पुत्र	38	1101	0.034	0.034
	शम दत्त		1108	0.018	0.018
			1107	0.081	0.081
			1105	0.010	0.010
			994	0.010	0.010
			995	0.004	0.004
			991	0.075	0.075
			992	0.064	0.064
			994	0.010	0.010

(डम्पिंग भाग-)

खसरा नम्बरान

क्र. सं.	भूमिधर का नाम	खाता नं.	खेत नं०	कुल रकवा (हे.)	अर्जित रकवा (हे.)
5	पीताम्बर पुत्र हीरा बल्लभ	41	949	0.024	0.024
			949 क	0.024	0.024
			948	0.018	0.018
			952	0.051	0.051
			946	0.024	0.024
			945	0.010	0.010
6	भूवनचंड पुत्र जगन्नाथ	48	949 क	0.024	0.024
			1001	0.059	0.059
			944	0.014	0.014
			943	0.006	0.006
7	रामदत्त पुत्र तिलोचन	54	1114	0.010	0.010
			1106	0.023	0.023
			5235	0.066	0.066
8	राधाकिशन पुत्र रामकिशन उर्फ रामा	51	5223	0.021	0.021
			5232	0.010	0.010
			5233	0.011	0.011
			5111	0.036	0.036
			5109	0.036	0.036
			5110	0.036	0.036
			4908	0.023	0.023
	कुल योग		39 नं०	1.182	1.182

दर विश्लेषण

Name of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (Length 8.00 Km.)

S. No	Item of work		Per	Rate
1	2	3	4	5
1	Excavation in foundation for retaining & breast walls in all types of soils and rocks including lead, lift and disposal of surplus material as per direction of engineer - in - charge Schedule of rate (S.O.R Attached)		Cum	234.80
2	Providing and laying of wire crates 3.00x1.50x1.50 in size with a 10 gauge BWG GI wire conforming to IS: 280 & IS:4826 in 150mm x 150mm mesh laid with stone boulders weighing not less than 25 kg each.(As per PWD Uttarakhand Specification) Schedule of rate (S.O.R Attached) Rs. 8324.10 / No	Or	Cum	1233.20
	Deduct 40 % (As lesser specification of material & workmanship will be acceptable due to non significant purpose and being the part of main construction.	(-)	Cum	493.28
	Total		Cum	739.92
3	Random Rubble stone masonry in Coolie walling including supply of all material, labour, T&P etc. required for proper completion of the work.(As per PWD Uttarakhand specifications) Schedule of rate (S.O.R Attached)		Cum	1149.90
	Deduct 40 % (As lesser specification of material & workmanship will be acceptable due to non significant purpose and being the part of main construction.	(-)	Cum	459.96
	Total		Cum	689.94
4	Rate of Unirrigated Nap land		Hec	1125000.00



सहायक अभियन्ता II
विमान सड़, लो. नि. वि.
रानीखेत

अभियन्ता अभियन्ता,
विमान सड़, लो. नि. वि.,
रानीखेत

Detail of measurment

Name of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (Length 8.00 Km.)


S N	Particulars	No.	L	B	H/D	Quantity	
1	2	3	4	5	6	7	
1	Excavation in foundation for retaining & breast walls in all types of soils and rocks including lead, lift and disposal of surplus material as per direction of engineer - in - charge Dumping Yard no.-1	1x1/3	175.00	1.50	1.00	1312.50	
					Total	1312.50	cum
2	Providing and laying of wire crates 3.00x1.50x1.50 in size with a 10 gauge BWG GI wire conforming to IS: 280 & IS:4826 in 150mm x 150mm mesh laid with stone boulders weighing not less than 25 kg each.(As per PWD Uttarakhand Specification) Dumping Yard no.-1	1x2x3x50 1x2x3x6	3.50 3.50	1.50 1.50	1.50 1.50	2362.50 283.50	
					Total	2646.00	cum
3	Random Rubble stone masonry in Coolie walling including supply of all material, labour, T&P etc. required for proper completion of the work.(As per PWD Uttarakhand specifications) Dumping Yard no.-1	1x2 1x2	175.00 18.80	0.60 0.60	1.55 1.55	325.50 34.97	
					Total	360.47	cum
	Required area of Civil land	1x1	175.00	20.00		3500.00	
					Total	3500.00	Sqm
					Or	0.35	Hect.

Detail of measurment


Name of Work :- Construction of Dwarahat Suraikhet motor road to Bayela Nar Motor road. (Length 8.00 Km.)

Capacity of dumping yard

Sl. No.	Particulars of item	No.	L	B	H/D	Quantity	
1	2	3	4	5	6	7	
1	Capacity of Dumping Yard						
	Dumping Yard no.-1	1x1	175.00	20.00	6.05	21175.00	
					TOTAL	21175.00	cum
	Required Qty. For proposed dumping yard (say)					17476.40	cum



सहायक अभियन्ता,
निर्माण खण्ड, लो. नि. वि.
रानीखेत


अधिसारी अभियन्ता,
निर्माण खण्ड, लो. नि. वि.,
रानीखेत.

अनाभावि प्रमाण पत्र

सेवा में

अधिवासी अभियेता

लो० नि० वि० रानीरबेल

प्रमाणित किया जाता है कि शासन द्वारा स्वीकृत जनपद-अल्मोड़ा में विकास कार्य द्वारा के अन्तर्गत द्वाराहट सुदूर क्षेत्र में रहे वयेला, नर मोटर भाग का नव निर्माण 8.4.11 के निर्माण में जो मलुवा उत्पादित होगा, उसका निस्तारण ग्राम स्वभा वयेला स्वयं फलदायी की माफ भूमि में किया जायेगा, जिससे किसी को भी किसी प्रकार की आपत्ति नहीं है,

- ① श्री पण्डित
- ② प्रदीप पाण्डेय
- ③ चन्द्र प्रकाश
- ④ वासन्ता कुमारी
- ⑤ चन्दन शर्मा
- ⑥ धामी राम
- ⑦ पनी राम

- ⑧ पुष्पा देवी
- ⑨ गीता देवी
- ⑩ पुष्पा देवी

16/12/14
उपनिरीक्षक राजस्व पुलिस
क्षेत्र ...
तहसील-द्वाराहाट

प्रधान
ग्राम पंचायत वयेला
पो0आर व-अरिया
(क्षेत्र पंचायत, ज.प.अ. अल्मोड़ा)

तहसीलदार
द्वाराहाट

अनापत्य प्रमाण पत्र

016

सेवा में - आदिशापी अभियन्ता लो. नि० वी० रानीखेत

प्रमाणित किया जाता है, कि शासन द्वारा स्वीकृत जनपद अल्मोड़ा में विकास खण्ड द्वाराहाट के अन्तर्गत द्वाराहाट सुरेईखेत भोय मार्ग से वीथी नाड़ भोय मार्ग का नव निर्माण 8 कि.मी. के निर्माण में जो मलुवा उत्पादित होगा उसका निष्कारण ग्राम सभा फल्दाडी की माप भूमी में किया जायेगा जिसमें किसी को भी किसी प्रकार की कोई आपत्तीय नहीं है,

अधीन

इस्लाम ग्रामवासी नाड़ फल्दाडी

प्रकाश चन्द्र पन्त - *Ready*

जेशीदा (लोणाड़) - पू. क्षेत्र, वसिस्ता

दीप चन्द्र पन्त

किशन पन्त

दिनेश चन्द्र पन्त *Dev* -

हरन चन्द्र पन्त

तारी राम

विश्वनाथ

प्रेम राम

मदन मोहन पन्त

मन्मथ पन्त

चम्पा पन्त


विपिन चन्द्र पन्त

ग्राम पंचायत फल्दाडी
वि०खण्ड द्वाराहाट (अल्मोड़ा)

Signature
निरीक्षक/सहायक पुलिस
क्षेत्र *Faldevan*
तहसील - द्वाराहाट

Signature 27/7/14
तहसीलदार
द्वाराहाट

कार्य का नाम :- बयेला नाड मोटर मार्ग का नव निर्माण

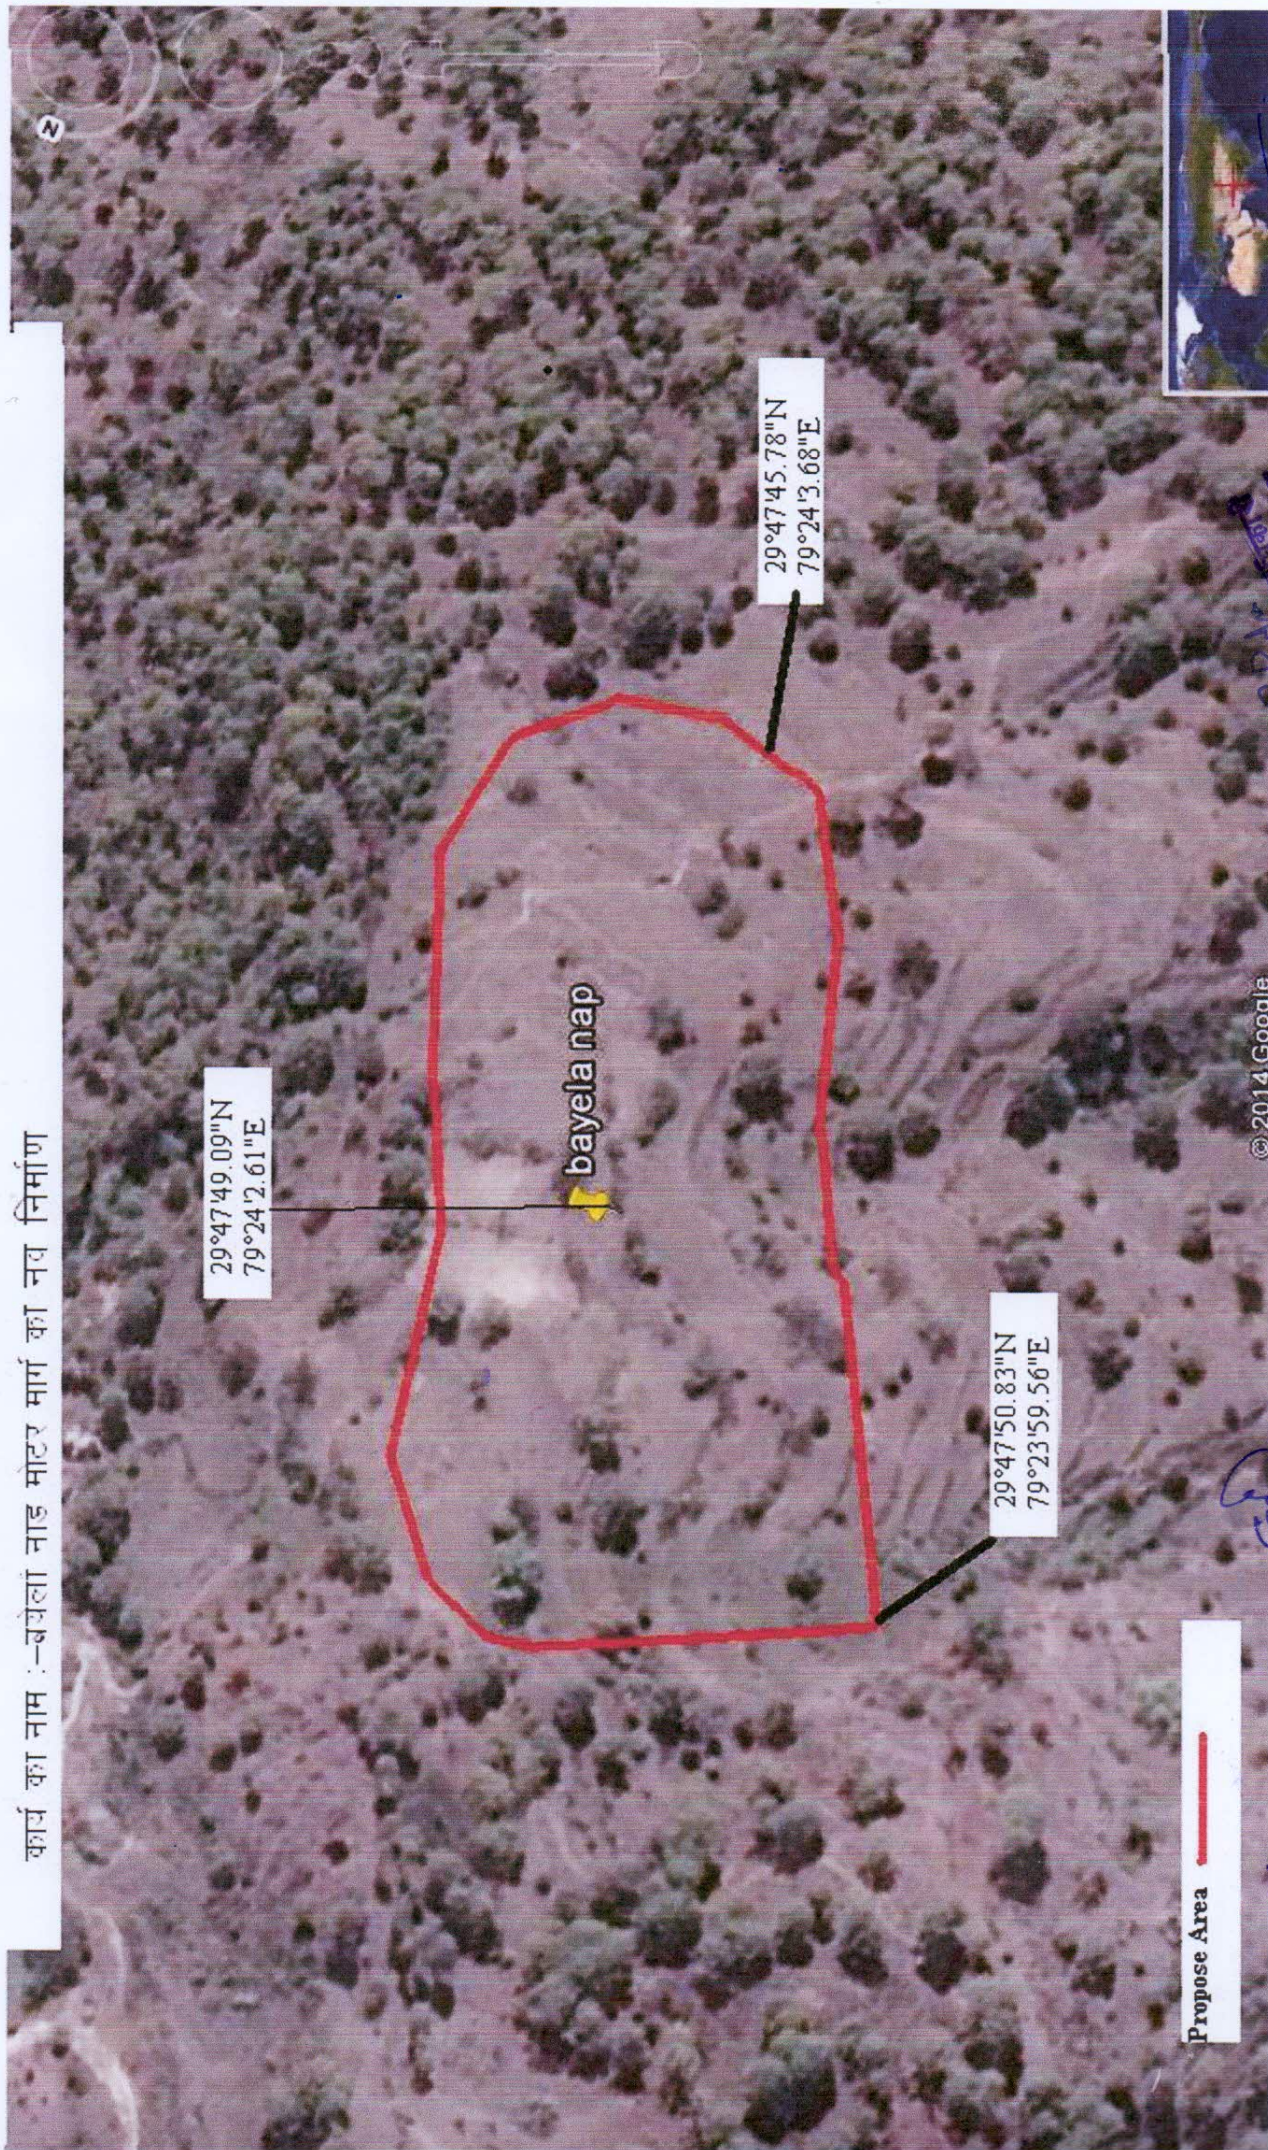

Propose Area

© 2014 Google

सहायक आयुक्त-रा
मिड राफ. राफो मिड मि
समीक्षक

बयेला नाड मोटर मार्ग का नव निर्माण
प्र. वि.

सहायक आयुक्त-रा
मिड राफ. राफो मिड मि
समीक्षक




सहायक आयुक्त-रा
मिड राफ. राफो मिड मि
समीक्षक

मलुवा निस्तारण योजना से सहमत प्रमाण पत्र

परियोजना का नाम :- जनपद अल्मोड़ा में बयेला नाड मोटर मार्ग का निर्माण

प्रमाणित किया जाता है कि लोक निर्माण विभाग द्वारा प्रस्तावित मलुवा निस्तारण प्रस्ताव से सहमत हूँ।


वन दरोगा
अल्मोड़ा वन प्रभाग, अल्मोड़ा


वन क्षेत्राधिकारी
अल्मोड़ा वन प्रभाग, अल्मोड़ा


उप प्रभागीय वनाधिकारी
अल्मोड़ा वन प्रभाग, अल्मोड़ा

प्रति हस्ताक्षरित

प्रभागीय वनाधिकारी
अल्मोड़ा वन प्रभाग, अल्मोड़ा