

परियोजना का नाम :-

मा0 मुख्यमंत्री घोषणा संख्या 317/2013 के अन्तर्गत जनपद नैनीताल के विकास खण्ड हल्द्वानी में विजयपुर पहाड़पानी पैदल मार्ग के किमी0 0.00 (देवल मल्ला) से किमी0 2.00 तक मार्ग को मोटर मार्ग में परिवर्तित करते हुए मार्ग का सुधारीकरण/पुनः निर्माण एवं सूखी नदी पर काजवे का निर्माण। (वास्तविक लं० 1.7० कि०मी०)

परियोजना स्थल किसी राष्ट्रीय पार्क / वन्य जीव अभ्यारण्य का हिस्सा न होने का प्रमाण-पत्र

प्रमाणित किया जाता है कि प्रश्नगत परियोजना के निर्माण हेतु आवेदित वन भूमि किसी राष्ट्रीय पार्क / वन्य जीव अभ्यारण्य का हिस्सा नहीं है।

ह0 /

प्रभागीय वनाधिकारी
हल्द्वानी वन प्रभाग
हल्द्वानी.

कार्य का नाम

:- मा0 मुख्यमंत्री घोषणा संख्या 317 / 2013 के अन्तर्गत जनपद नैनीताल के विकास खण्ड हल्द्वानी में विजयपुर पहाड़पानी पैदल मार्ग के किमी0 0.00 (देवल मल्ला) से किमी0 2.00 तक मार्ग को मोटर मार्ग में परिवर्तित करते हुए मार्ग का सुधारीकरण/पुनः निर्माण सूखी नदी पर काजवे का निर्माण।(नारस्तिक, लग 1.70 कि०मी०)

भारत सरकार के पत्रांक 11/मिस0/618/2010/उप्र0, राज0, उत्तराखण्ड/11/58 दिनांक 16

अप्रैल, 2014 साथ संलग्न प्रारूप के अनुसार मलुवा निस्तारण योजना

1	Calculation of muck to be generated Swell factor has to be applied.	15288.60 cum
2	Quantity of muck to be utilized in the project activities.	100 % ie 15288.60 cum
3	Balance quantity of muck which requires disposal / Management plan.	NIL
4	Carriage of muck from the muck generation site to the dumping site.	Not Applicable
5	Ownership of land and the consent of land owners, in case muck disposal is proposed on non forest land. Photograph and carrying capacity of proposed dumping site (Muck disposal site)	NIL
6	Development of dumping site construction of retaining walls and other structure as per requirement of the site. The objective is to completely stop rolling down of the muck.	NIL
7	Rehabilitation of dumping site like leveling, planting of grass, shrubs and tree species.	NIL

Enclosed 2 Performa

Undertaking

I undertaking that :-

1. Muck management plan will be implemented by the user agency.
2. The proposed dumping site is located away from river / Stream / Nala.


P.W.D. Nainital
नैनीताल


Executive Engineer
Prov. D.V. P.W.D. Nainital
देवताल

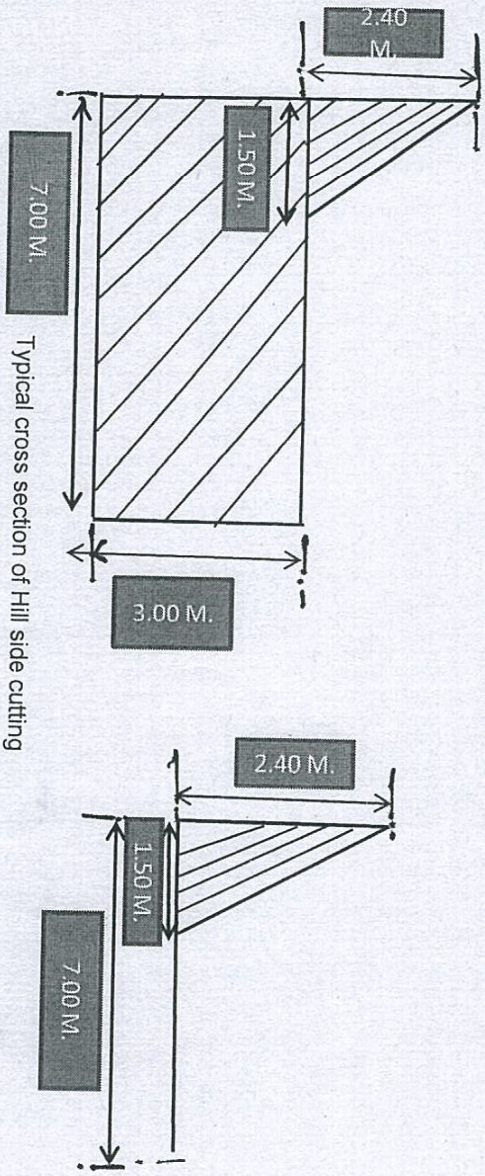

Divisional Forest Officer
Haldwani Forest
Division Haldwani

Name Of Project:-माननीय मुख्यमंत्री घोषणा सं0 317/2013 के अन्तर्गत जनपद नैनीताल के विकास खण्ड हल्द्वानी में (विधानसभा क्षेत्र तालकुंआ) विजयपुर पहाड़पानी पैदल मार्ग के किमी0 0.000 (देवल मल्ला) से किमी0 2.00 तक मार्ग को मोटर मार्ग में परिवर्तित करते हुए मार्ग का सुधारीकरण/पुनःनिर्माण एवं सूखी नदी पर कॉजवे का निर्माण। (वास्तविक लम्बाई 1.70 किमी0)

Muck Disposal Proposal(मलुवा निस्तारण प्रस्ताव)

A- Calculation of quantities of MUCK/Debris generated due to excavation of Hill Side Cutting

Sl No.	Item of work	Nos.	Length (in m)	Average Width (in m)	Average Height (in m)	Quantity
1	2	3	4		6	7
1-	Cutting Work of Road in KM 2nd					
	Km. 1 (0.000-1.000)	1 x 1	1000.00	7.00	3.00	10500.00
	Km. 2 (1.000-2.000)	1 x 1/2	700.00	1.50	2.40	1260.00
					Total	11760.00
	Add swell facor 30% of hill side cutting					3528.00
					G.Total	15288.00



B	Quantity of Muck/Debris to be used as given below:-					
1	Filling of material in the back of Retaining wall is taken as approximately 600 M. length/Km and height varied from 6 to 7 m (Average 6.50 mtr) along the length of the road. The quantity of the material retain behind it is as below.					
	Km. 1 (0.000-1.000)	1 x	1	600.00	6.50	0.50
	Km. 1 (0.000-1.000)	1 x	2	50.00	6.50	2.50
	Causway	1 x	1	300.00	7.00	5.00
						Total
	Add Compection 25% of Earth Filling					14075.00
						3518.75
					G.Total	17593.75

Consumption of Hill side cutting material used for construction of Road					
Total B					
17593.75					

सहायक अभियन्ता
प्रान्तीय खण्ड, नैनीताल

अभियन्ता की अतिरिक्त
प्रान्तीय खण्ड, नैनीताल

प्रभागीय वनाधिकारी
हल्द्वानी वन प्रभाग, हल्द्वानी.


SUMMARY OF MUCK DISPOSAL PLAN

Name Of Project:-माननीय मुख्यमंत्री घोषणा सं0 317 / 2013 के अन्तर्गत जनपद नैनीताल के विकास खण्ड हल्द्वानी में (विधानसभा क्षेत्र तालकुंआ) विजयपुर पहाड़पानी पैदल मार्ग के किमी0 0.000 (देवल मल्ला) से किमी0 2.00 तक मार्ग को मोटर मार्ग में परिवर्तित करते हुए मार्ग का सुधारीकरण / पुनःनिर्माण एवं सूखी नदी पर कॉर्जेबे का निर्माण। (वास्तविक लम्बाई 1.70 किमी0)

S.No.	Item of Work	Quantity	Unit	Remarks
A.	Quantities of MUCK/Debris generated due to excavation of Hill Side Cutting	15288	Cum	As per detail attached
B.	Quantity of Muck/Debrises to be required for construction of road			
1	For Filling in the back of R/Wall	17593.75	Cum	As per detail attached
	Total B	17593.75	Cum	

S.N	Quantities of MUCK/Debris generated due to excavation of Hill Side Cutting	Quantity of Muck/Debrises to be used during construction of road	Balance Qty (A-B)
1	15288	17593.75	-2305.75

Note:- Hence muck generated is below then muck required for construction of road. So that no extra dumping yard is required for muck disposal.


सहायक अभियन्ता
जनपद नैनीताल


सहायक अभियन्ता
जनपद नैनीताल


प्रभागीय वनाधिकारी
हल्द्वानी वन प्रभाग, हल्द्वानी