



परियोजना का नाम:-


जनपद चमोली के विधानसभा क्षेत्र कर्णप्रयाग के अन्तर्गत राज्य योजना में डिम्बर-सुमल्टा मोटर मार्ग के कि०मी० 6 से ग्राम कोलाडुंग्री तक मोटर मार्ग के नवनिर्माण हेतु 0.805 है० सिविल भूमि एवं मक डिस्पोजल हेतु 0.056 है० कुल 0.861 है० सिविल भूमि का लो०नि०वि० को हस्तान्तरण।


भू-वैज्ञानिक / जिला टाँस्क फोर्स की संस्तुतियों का अनुपालन किये जाने का प्रमाण-पत्र।

प्रमाणित किया जाता है कि प्रस्तावित परियोजना हेतु भू-वैज्ञानिक/जिला टाँस्क फोर्स द्वारा दिये गये सुझावों/शर्तों का निर्माण कार्य के दौरान याचक विभाग द्वारा पूरी तरह अनुपालन किया जायेगा।


अमीन


कनिष्ठ अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर


सहायक अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर

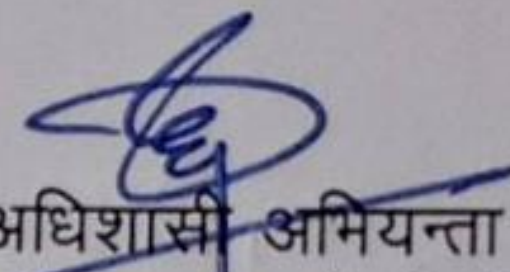
अधिशाली अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर

Task Force Certificate


- (i) Lay out of the Land-be followed as far as possible.
- (ii) Heavy cutting/filling be avoided-as far as possible. The technology of cut and fill method is to be adopted. Steep hill slopes also to be avoided.
- (iii) Unstable/slide-prone areas to be avoided. For identifying such areas the advice of Geotechnical engineers and geologists to be taken during the survey for alignment.
- (iv) Comparison of various possible alignments with reference to erosion potential be made and the alignment involving minimum erosion risks be preferred.

A part from the stage of planning the road alignment, effective steps are also required to be taken by ground engineer during the process of road construction for minimized ecological disturbance to the hill roads Broadly the measures to be taken have been identified as :-


- (i) Cut and fill method to be adopted while excavating for road formation and heavy earth cutting is to be avoided Box cutting is to be avoided to the extent possible.
- (ii) (ii) Blasting by explosives is to be restricted to the minimum. Lay out of holes to be drilled for blasting is to be planned keeping in view the line of least resistance and the existence of joints Controlled blasting should be repeated using low charge and care be taken to avoid activating slide zones or widening fissures and cracks in rock. Use of delay detonators in large scale blasting work is to be made for anaoline dispersion of chock waves, so that minimum disturbance is caused to the rock stratum as a result of the blasting process.
- (iii) (iii) All cut slopes, unusable hill side and slide prone erosion prone areas are to be provided with suitable correction measures by using one or the other of the techniques developed by CRRI. Several techniques have been sponsored by CRRI. like simple vegetative turning, bitumen much treatment and slide treatment by jute netting coir netting of these simple vegetative turning seems to be the most appropriate preventive measure in many situations. This should be established in the denuded slopes immediately after the excavation is made
- (v) Adequate drainage measures and protective structures like intercepting catch water drains, longitudinal drains/culvers, breast walls, retaining and the walls are provided for purposes of establishing the slips Growth vegetative cover is stimulated in the disturbed hill slopes above the road level by planting suitable fast growing shrubs and plants. In certain selected unstable areas terraced afforestation has also been plasticized as a stabilizing measure with good results.

- (vi) Over the past few years the roads wing of the Ministry of Shipping and transport has issued instruction laying down broad guidelines and check list of the preparation of road construction projects which provide an inbuilt mechanism of tackling land slides/erosion control for the guidance and follow up action by engineers of state 'PWD' Border Roads Organization and other engaged in construction of hill roads these should be observed.


प्रमाणित किया जाता है कि योजना आयोग द्वारा गठित टास्क फोर्स की उपरोक्त संस्तुतियाँ याचक विभाग को मान्य हैं।




अमीन



कनिष्ठ अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर



सहायक अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर

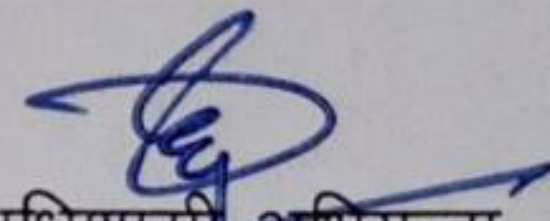

अधिशाली अभियन्ता
निर्माण खण्ड लो०नि०वि०
गौचर