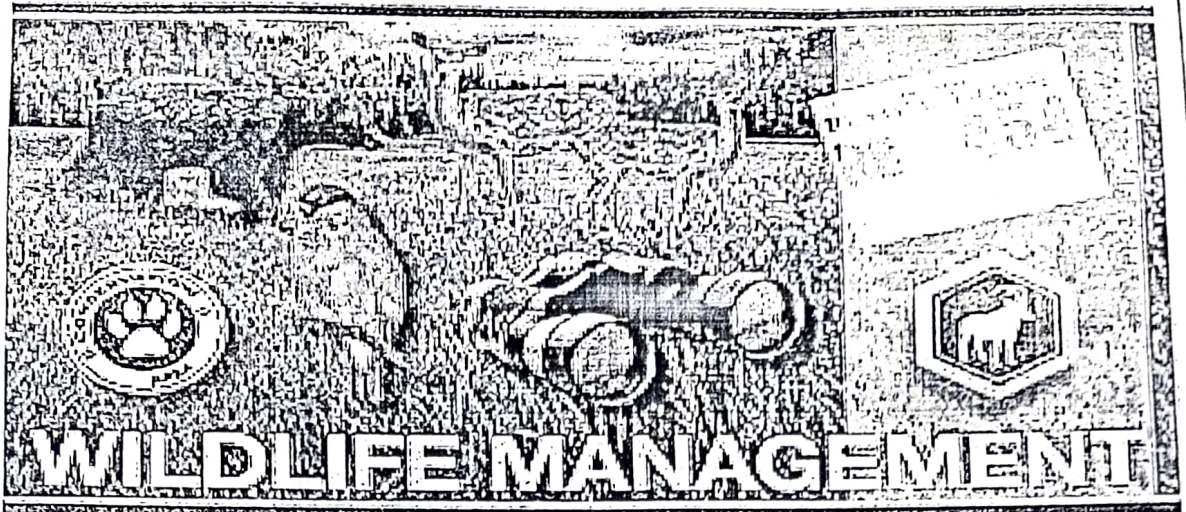


Wildlife Management Plan and Soil Moisture Conservation Plan



Proposal Name जनपद चमोली में सिमली से नाखोली मोटर मार्ग के निर्माण हेतु 1.632 है० वन भूमि का लोक निर्माण विभाग को हस्तान्तरण।

Distt.

Chamoli

Estimated cost (Lacs)

0.960


Estimated no. & date

Year

2024-25

Summary Of Estimated Cost


S.No.	ITEM	UNIT	SOR / DSR	QTY	RATE	AMOUNT
A	Wildlife Management Plan (2.00 %)					
1	Contour Trenches	meter	Departmental	125.00	104.36	13045.00
2	Kala Bansa, Gajar Ghas, Lantana elimination	ha	Departmental	3.50	Annexure	48963.02
3	Awareness Promotion		Ls	1.00	15000.00	15000.00
Total						77008.02
say in lacs						0.768
B	Soil Moisture Conservation Plan (SMC Work) (0.50 %)					
1	Construction of Chal khali	Cum	Pwd SOR	1.00	Annexure	19228.57
Total						19228.57
say in lacs						0.192


 प्रकाश चन्द्राधिकारी
 जमीन वन प्रभाग गोपबंद
 ५६ (मोती)



Checked for Rs

0.96 lacs


 D/Man
 Forest

Name of work :- चाल खाल निर्माण कार्य।

Detail of Measurement

S. No.	Particulars of Item	Nos.			Length (m)	Width (m)	Height (m)	Quantity	Unit
1	Excavation for Structures Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of slides and bottom and backfilling in trenches with excavated suitable material. Ordinary soil upto 3 m depth								
	chal khal	1	x	1	6.00	4.00	1.00	24.00	cum
	Drain	1	x	2	10.00	0.30	0.30	1.80	cum
							Total	25.80	cum
2	Random Rubble Stone Masonry laid Dry, in breast walls, retaining walls, etc. Including supply of all material, labour, T&P and royalties etc. complete as per drawing and technical specifications Clauses 702, 704, 1202 & 1203 of MORD Specification								
	kharanja at top l/w	1	x	1	7.20	0.60	0.25	1.08	cum
	s/w	1	x	2	4.00	0.60	0.25	1.20	cum
							Total	2.28	cum

[Signature]
प्रमाणित वनाधिकारी
कदीनाथ कन प्रमाण गोपिकर्ष
५२ (विनीली)

[Signature]
नया वनाधिकारी
विजय विण्डरः दल
नारायणदह

Bill of Qty.

Name of work :- चाल खाल निर्माण कार्य।

S. No	ITEM	UNIT	SOR / DSR	QTY	RATE	AMOUNT
1	Excavation for Structures Earthwork In excavation for structures as per drawing and technical specifications Clause 305.1 Including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material. Ordinary soll Upto 3 m depth	Cum	11-1-1-1 MORD	25.80	419.60	10825.68
2	Random Rubble Stone Masonry laid Dry, in breast walls, retaining walls, etc. Including supply of all material, labour, T&P and royalties etc. complete as per drawing and technical specifications Clauses 702, 704, 1202 & 1203 of MORD Specification	Cum	1-3 MISS	2.28	2399.00	5469.72
			Total			16295.40
4	Add 18% GST					2933.17
			Total			19228.57

प्रभारणीय योजनाधिकारी
बदीनसुख वन प्रभाग गोपेश्वर
(चमोली)

जन्म अधिकारी
हिचमी विण्डार राजि
नारायणगढ़

वन्यजीवों के विकास का प्रबन्धन योजना

बद्रीनाथ वन प्रभाग, गोपेश्वर घमोली।

क्र०सं०	कार्य का विवरण	मात्रा	इकाई	दर	घनराशि (रु०)
0	1	2	3	4	5
A लेटाना/कालाबांस/गाजर घास झाड़ी					
प्रथम वर्ष					
1	लेटाना/कालाबांस/गाजर घास झाड़ी को जड़ सहित उखाड़ना।	3.50	है०	9341.00	32693.50
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गढ़े में दबाकर अथवा जलाकर	3.50	है०	3132.00	10962.00
द्वितीय वर्ष					
1	लेटाना/कालाबांस/गाजर घास झाड़ी को जड़ सहित उखाड़ना। (33 प्रतिशत)	0.46	है०	3082.00	1402.31
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गढ़े में दबाकर अथवा जलाकर	0.46	है०	1031.00	469.11
तृतीय वर्ष					
1	लेटाना/कालाबांस/गाजर घास झाड़ी को जड़ सहित उखाड़ना। (10 प्रतिशत)	0.35	है०	934.00	326.90
2	कालाबांसा को जड़ से उखाड़ना एवं नष्ट करना/गढ़े में दबाकर अथवा जलाकर	0.35	है०	312.00	109.20
total (A)					45963.02
B नमक आपूर्ति करना					
1	वन्यजीवों के कैल्शियम आपूर्ति हेतु नमक क्रय करना।	100.00	किग्रा०	30.00	3000.00
total (B)					3000.00
Total (A+B)					48963.02

प्रभारी वन अधिकारी
बद्रीनाथ वन प्रभाग गोपेश्वर
(घमोली)

हिचमी पिण्डार राज
नारायणगढ़