


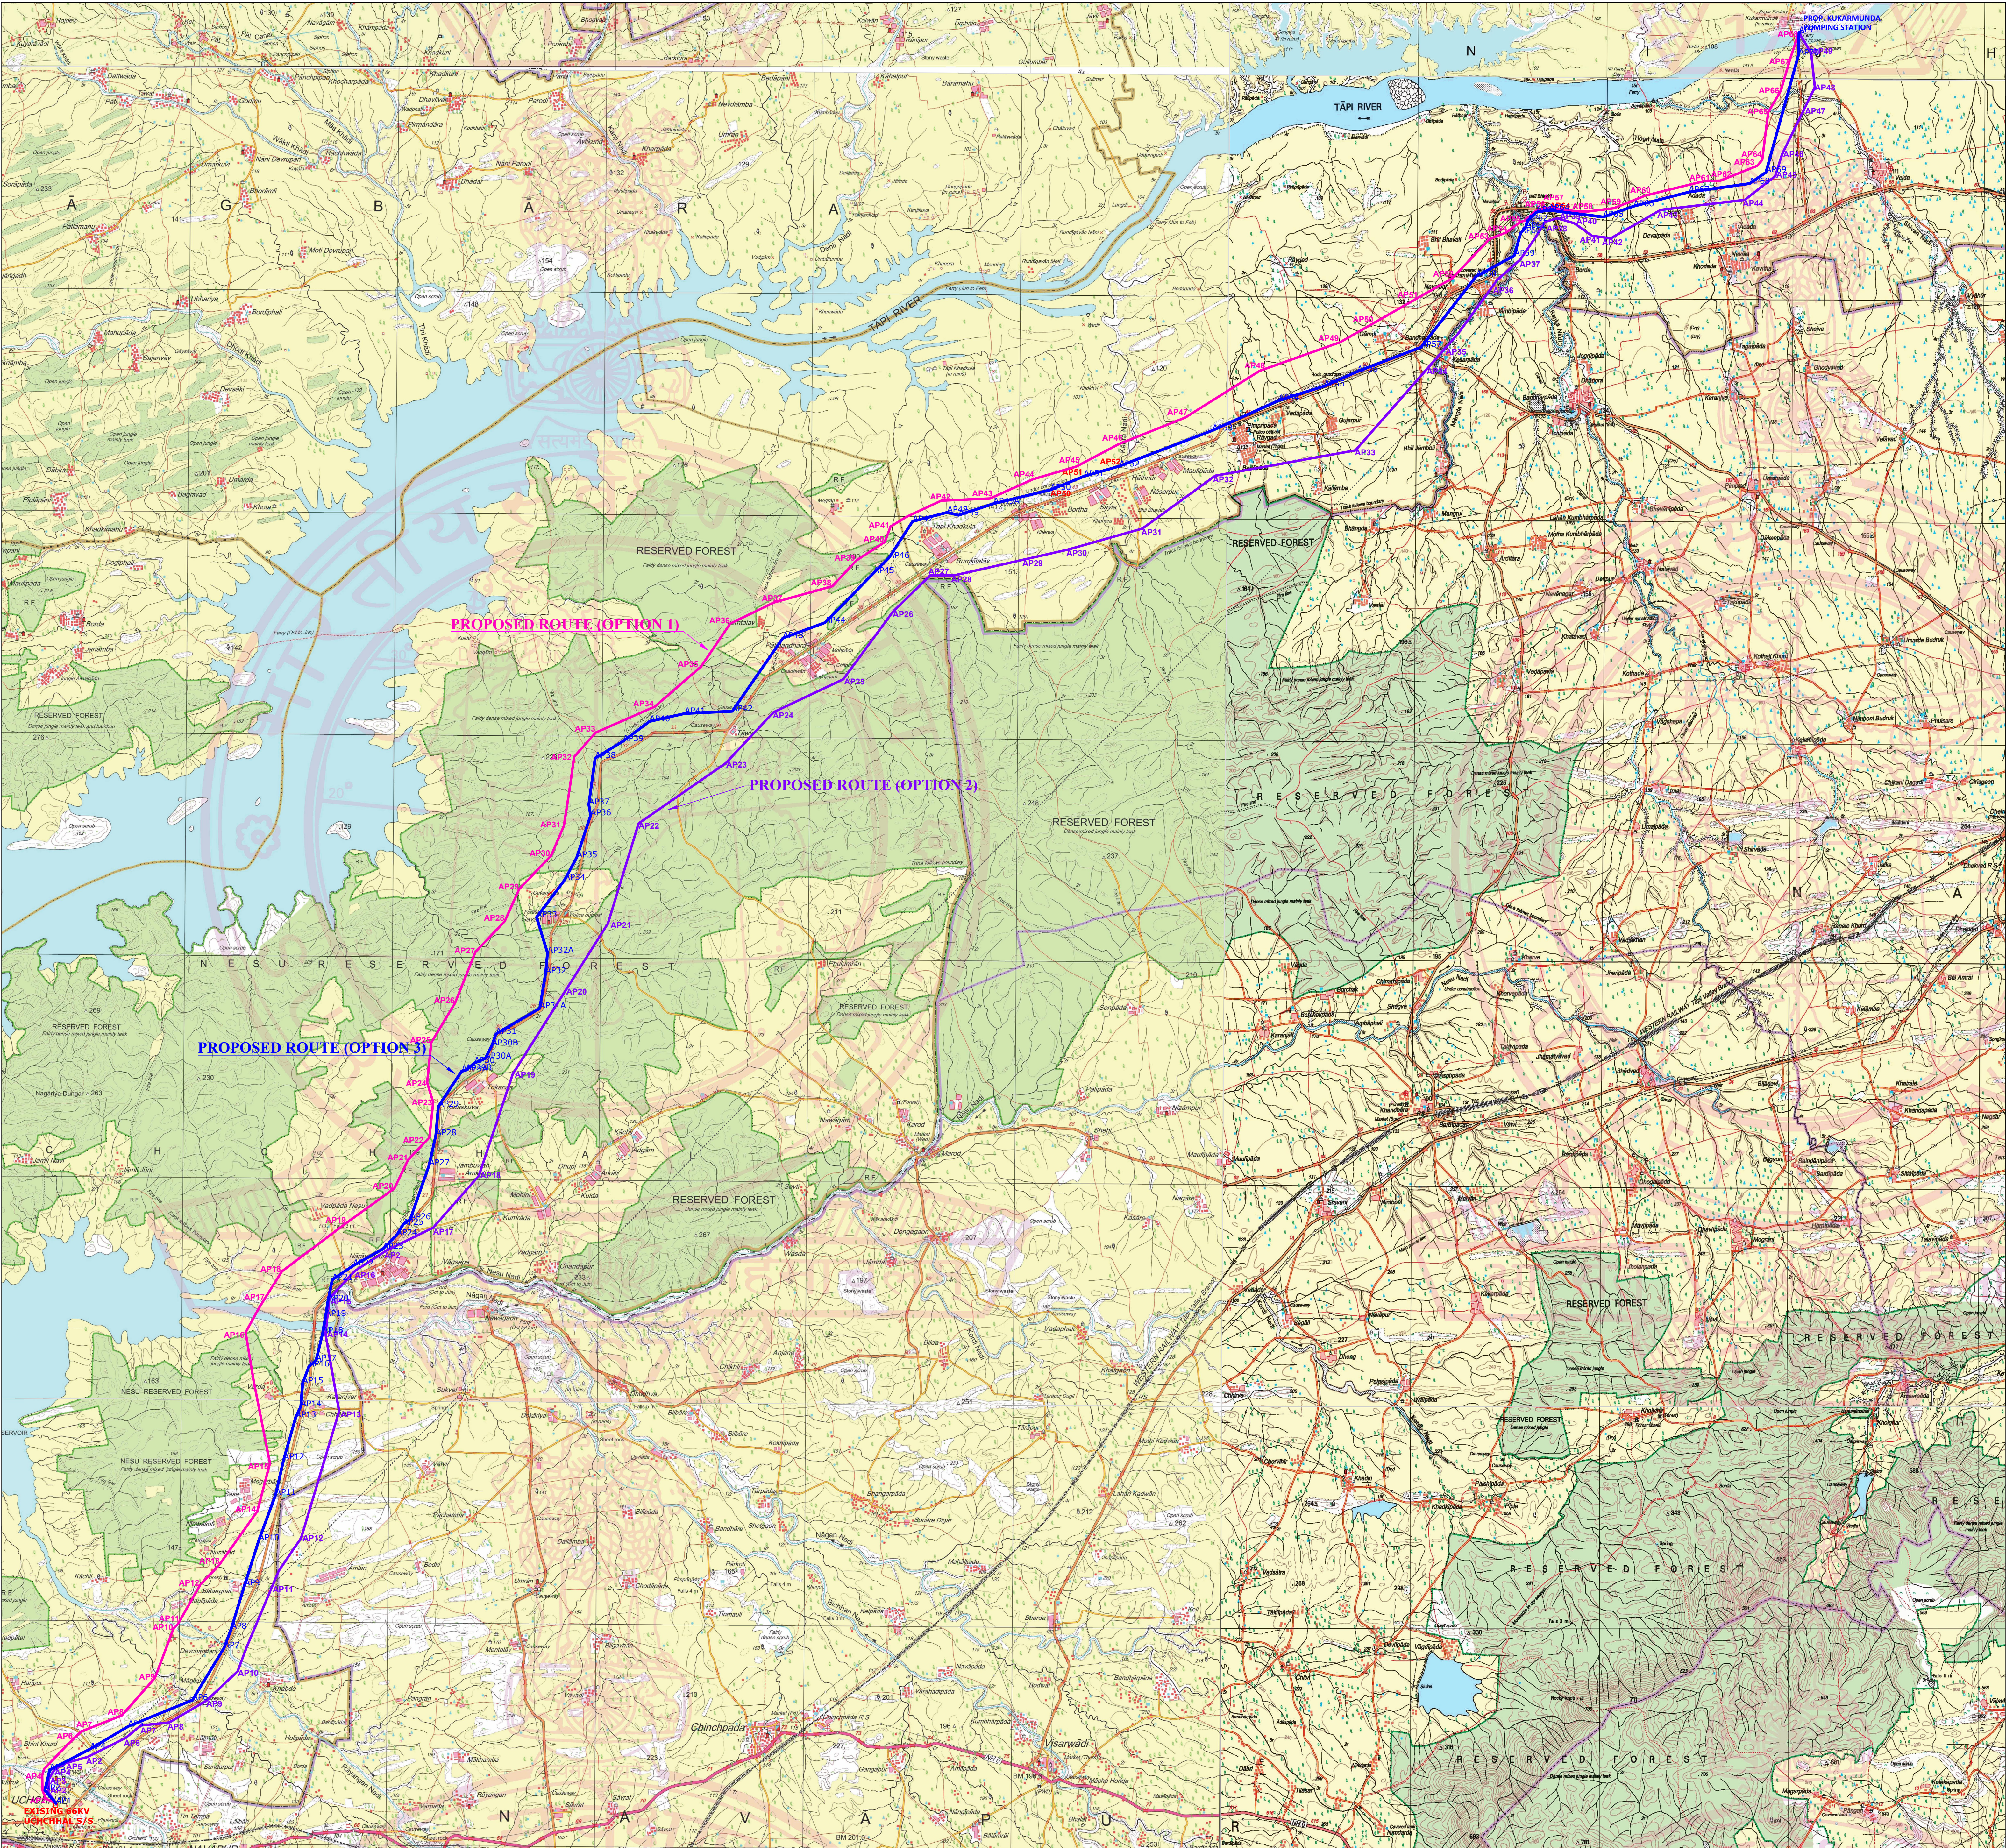

NOTE AND REFERENCE

APPROVALS

(1) NOTIFICATION :- NO :- PART NO :-	VOL.NO.:- DATED :-
(2) H.O. ROUTE APPRL:- NO:-CE(PRO)/ DATED :-	
(3) C.E.I. APPRL:- NO:-CEI/INS/ DATED :-	
(4) P.T.C.C APPRL:- NO:- PTCC/ DATED :-	

TOTAL BEE LENGTH OF LINE :-51.670KM
TOTAL LENGTH OF LINE :-58.284KM

CROSSING DETAILS

1. NATIONAL HIGHWAY CROSSING :-	00 NOS.
2. STATE HIGHWAY CROSSING :-	04 NOS.
3. VILLAGE ROAD CROSSING :-	16 NOS.
4. RIVER CROSSING :-	04 NOS.
5. CANAL CROSSING :-	00 NOS.
6. RAILWAY CROSSING :-	00 NOS.
7. 11KV LINE CROSSING :-	16 NOS.
8. 400KV D/C LINE CROSSING :-	00 NOS.
9. 220KV D/C LINE CROSSING :-	00 NOS.
10. 132KV LINE CROSSING :-	00 NOS.
11. 66KV LINE CROSSING :-	12 NOS.

TOWER SCHEDULE

1. "PP" TYPE TOWER :-	177 NOS.
2. "PQ" TYPE TOWER :-	26 NOS.
3. "PR" TYPE TOWER :-	17 NOS.
4. "PS" TYPE TOWER :-	24 NOS.
5. "DD" TYPE TOWER :-	04 NOS.

TOPOSHEET INDEX




46-G-14	46-K-2
46-G-15	46-K-3
46-G-16	46-K-4

Executive Engineer (Const.)
GETCO, Construction Division
NAV-SARI

LEGEND

- (1) EXISTING 66KV UCHCHHAL S/S GANTRY
- (2) PROP. KUKARMUNDA PUMPING STATION
- (3) — PROPOSED ROUTE (OPTION 1) LINE LENGTH = 57.71km
- (4) — PROPOSED ROUTE (OPTION 2) LINE LENGTH = 57.60km
- (5) — PROPOSED ROUTE (OPTION 3) FINAL ROUTE=58.284km



GUJARAT ENERGY TRANSMISSION CORPN.LTD
S.P VIDYUT BHAVAN RACE COURSE,
VADODARA-390007

PROPOSED ROUTE OF 66KV TOWER LINE FROM EXISTING 66KV UCHCHHAL S/S TO PROPOSED KUKARMUNDA PUMPING STATION WITH ACSR DOG CONDUCTOR

DRAWN : GETCO Const. S/Dn, Navsari	CHECKED : D.E. (TECH)	APPD : E.E.(CONST)	SIZE : A1
SCALE : 1:50000	DATE : 24 - 12 - 2021	DRG.NO.:	SHEET: 1 OF 1
			REV: RO