


MAP SHOWING PROPOSED WATER PIPELINE AND STRUCTURES LAYOUT FOR TELANGANA DRINKING WATER SUPPLY PROJECT. (INDALVAI SEGMENT - 11/2) NIZAMABAD DISTRICT.



Government of Telangana
Rural Water Supply and Sanitation

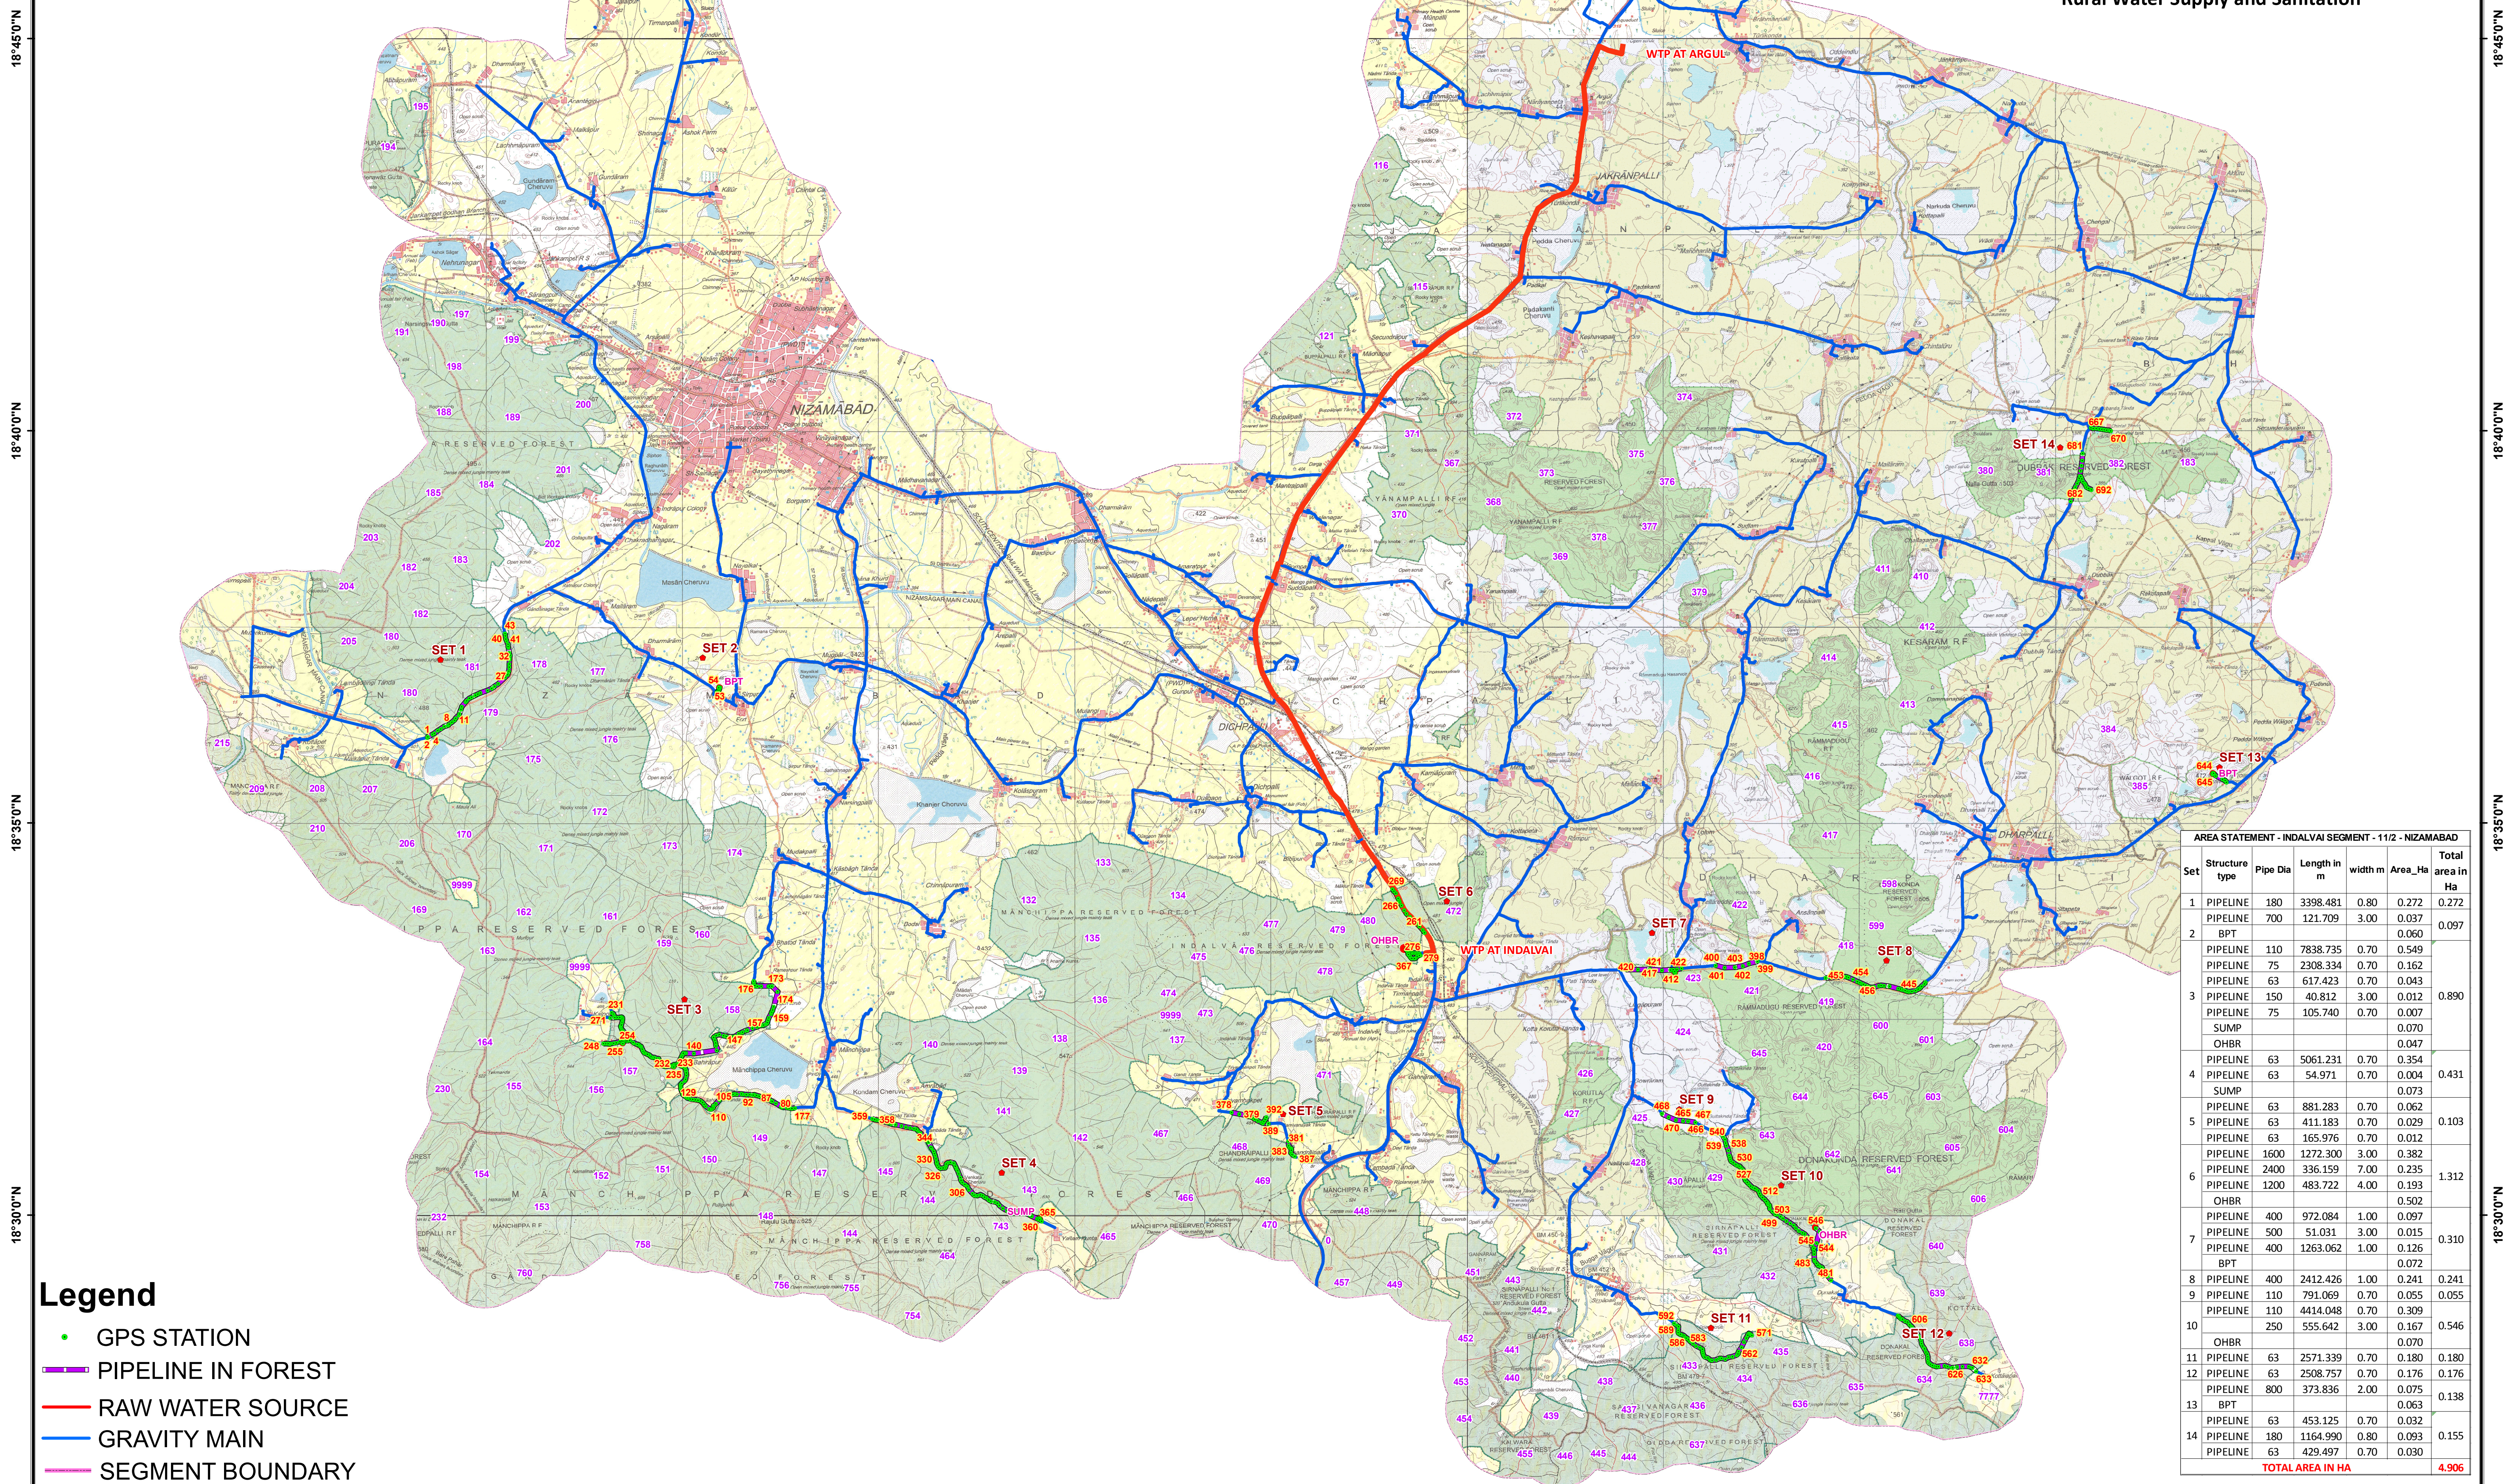

Legend

- GPS STATION
- PIPELINE IN FOREST
- RAW WATER SOURCE
- GRAVITY MAIN
- SEGMENT BOUNDARY

AREA STATEMENT - INDALVAI SEGMENT - 11/2 - NIZAMABAD						
Set	Structure type	Pipe Dia	Length in m	width m	Area_Ha	Total area in Ha
1	PIPELINE	180	3398.481	0.80	0.272	0.272
2	PIPELINE	700	121.709	3.00	0.037	0.097
	BPT				0.060	
3	PIPELINE	110	7838.735	0.70	0.549	0.890
	PIPELINE	75	2308.334	0.70	0.162	
	PIPELINE	63	617.423	0.70	0.043	
	PIPELINE	150	40.812	3.00	0.012	
	PIPELINE	75	105.740	0.70	0.007	
	SUMP				0.070	
	OHBR				0.047	
4	PIPELINE	63	5061.231	0.70	0.354	0.431
	PIPELINE	63	54.971	0.70	0.004	
	SUMP				0.073	
5	PIPELINE	63	881.283	0.70	0.062	0.103
	PIPELINE	63	411.183	0.70	0.029	
	PIPELINE	63	165.976	0.70	0.012	
6	PIPELINE	1600	1272.300	3.00	0.382	1.312
	PIPELINE	2400	336.159	7.00	0.235	
	PIPELINE	1200	483.722	4.00	0.193	
	OHBR				0.502	
7	PIPELINE	400	972.084	1.00	0.097	0.310
	PIPELINE	500	51.031	3.00	0.015	
	PIPELINE	400	1263.062	1.00	0.126	
	BPT				0.072	
8	PIPELINE	400	2412.426	1.00	0.241	0.241
9	PIPELINE	110	791.069	0.70	0.055	0.055
10	PIPELINE	110	4414.048	0.70	0.309	0.546
	PIPELINE	250	555.642	3.00	0.167	
	OHBR				0.070	
11	PIPELINE	63	2571.339	0.70	0.180	0.180
12	PIPELINE	63	2508.757	0.70	0.176	0.176
13	PIPELINE	800	373.836	2.00	0.075	0.138
	BPT				0.063	
14	PIPELINE	63	453.125	0.70	0.032	0.155
PIPELINE	180	1164.990	0.80	0.093		
	PIPELINE	63	429.497	0.70	0.030	
TOTAL AREA IN HA					4.906	