


Package - I

Rehabilitation and Up-gradation of Wadi To Asola Junction National Highway from [Design Km.00.000 to Km. 39+200] to Two lane with paved shoulders in the state of Maharashtra on Engineering, Procurement & Construction (EPC) Basis Contract.

Forest Land Statement (Wadi To Asola Junction)

S. No.	Design Chainage (in Forest Area)		Length (m)		Existing Road width (in Forest Area)		Proposed Road width (Required)		Forest Land width Required		Area for Forest Land for Diversion		Total Area	Name of Village	Gat No	Remark
	From	To	LHS	RHS	LHS	RHS	LHS	RHS	LHS	RHS	LHS	RHS				
1	7075	7172	97	3.50	3.50	9.00	9.00	5.50	5.50	533.50	533.50	1067.00	Wagdara	1		
2	7172	7400	228	3.50	3.50	9.00	9.00	5.50	5.50	1254.00	1254.00	2508.00	Isasani	1,6,107		
3	7700	8360	660	0.00	0.00	15.00	15.00	15.00	15.00	9900.00	9900.00	19800.00				
4	9540	9736	196	0.00	0.00	18.00	18.00	18.00	18.00	3528.00	3528.00	7056.00				
5	12130	12320	190	0.00	0.00	15.00	15.00	15.00	15.00	2850.00	2850.00	5700.00	Sukali Gupchup	150,136		
6	12700	12720	20	0.00	0.00	18.00	18.00	18.00	18.00	360.00	360.00	720.00				
7	26930	27200	270	3.50	15.00	15.00	15.00	11.50	0.00	3105.00	0.00	3105.00	Pohi	103,101/2, 100/1,91/1	Zudapi Jangal	
8	27345	27747	402	3.50	3.50	15.00	15.00	11.50	11.50	4623.00	4623.00	9246.00				
9	28426	28540	114	8.50	8.50	15.00	15.00	6.50	6.50	741.00	741.00	1482.00				
10	30260	30380	120	8.50	8.50	17.50	17.50	9.00	9.00	1080.00	1080.00	2160.00	Gangapur	7, 17-22, 24-30		
11	36340	36880	540	3.50	3.50	15.00	15.00	11.50	11.50	6210.00	6210.00	12420.00	Khairi Khurd	89,90		
12	37200	37320	120	0.00	0.00	15.00	15.00	15.00	15.00	1800.00	1800.00	3600.00				
13	37320	37700	380	3.50	0.00	15.00	15.00	11.50	15.00	4370.00	5700.00	10070.00				
14	37700	37840	140	3.50	15.00	15.00	15.00	11.50	0.00	1610.00	0.00	1610.00	Asola	41,42		
15	37840	38013	173	0.00	0.00	15.00	15.00	15.00	15.00	2595.00	2595.00	5190.00				
Total Length			3786									88862.00				
												Grand Total Area	8.89	Sqm.		
													Hect.			

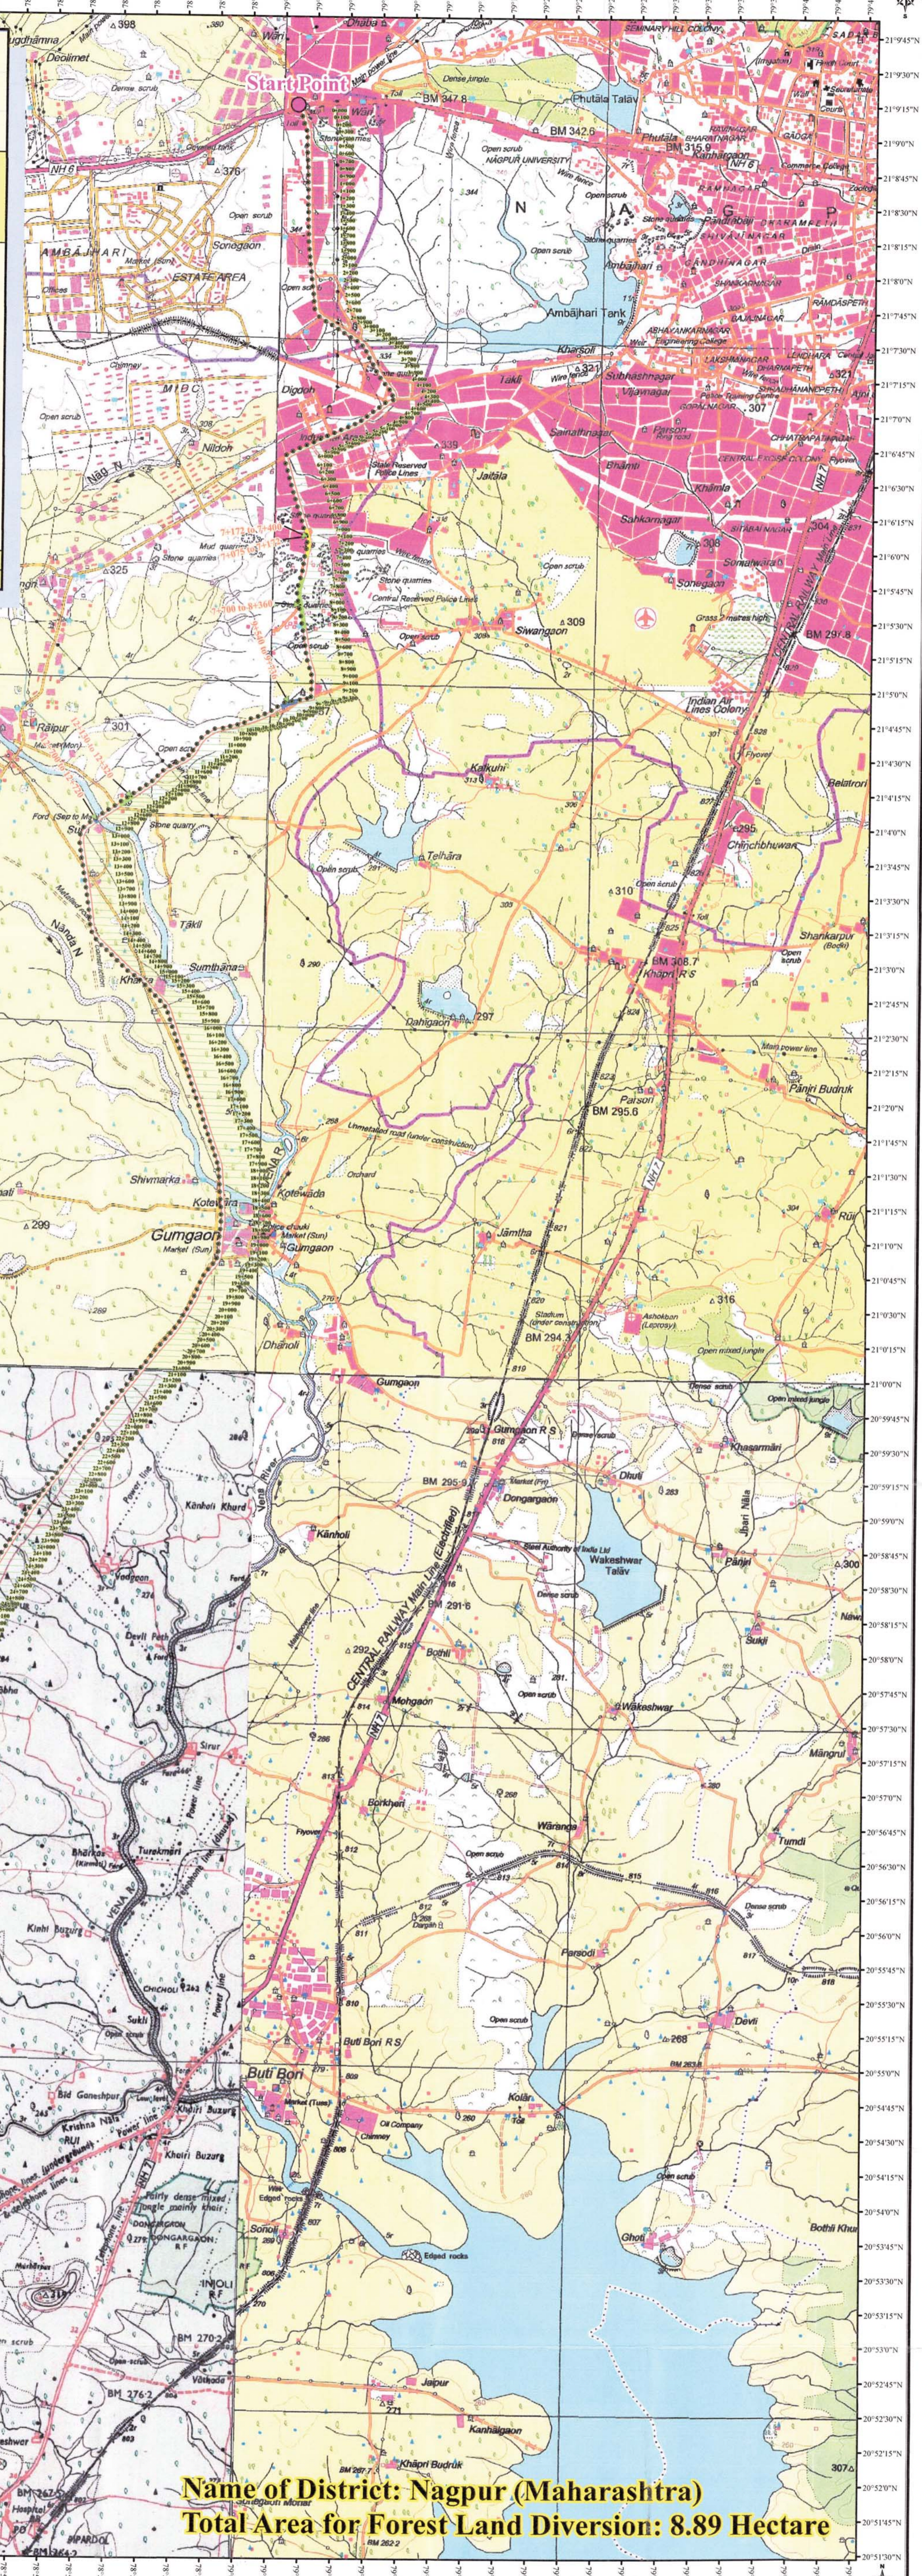

Name of District: Nagpur (Maharashtra)
Total Area for Forest Land Diversion: 8.89 Hectare

Project Road Alignment Marked on Toposheet for Forest Land Diversion
Name of Project - Rehabilitation and Up-gradation of Wadi to Asola Junction National Highway from [Design Km. 00.000 to Km. 39+200] to Two Lane with Paved Shoulders in the State of Maharashtra on Engineering, Procurement & Construction (EPC) Basis Contract..

1 0.5 0 1 2 3
Kilometers
Prepared By:
K & J Projects Pvt. Ltd.

Legend
 • Chainage
 — Project Road
 — Proposed ROW - 18 M
 — Proposed ROW - 30 M
 — Proposed ROW - 35 M
 — Proposed ROW - 36 M

Balwinder
Executive Engineer
National Highway Division
Nagpur