




LEGEND

- (1) EXISTING 66KV MAHUVA (GETCO) S/S
- (2) PROP. 66KV U/G CABLE LINE IN FOREST AREA
- (3) PROP. 66KV U/G CABLE LINE IN NON FOREST AREA
- (4) PROP. 66KV O/H TOWER LINE IN NON FOREST AREA

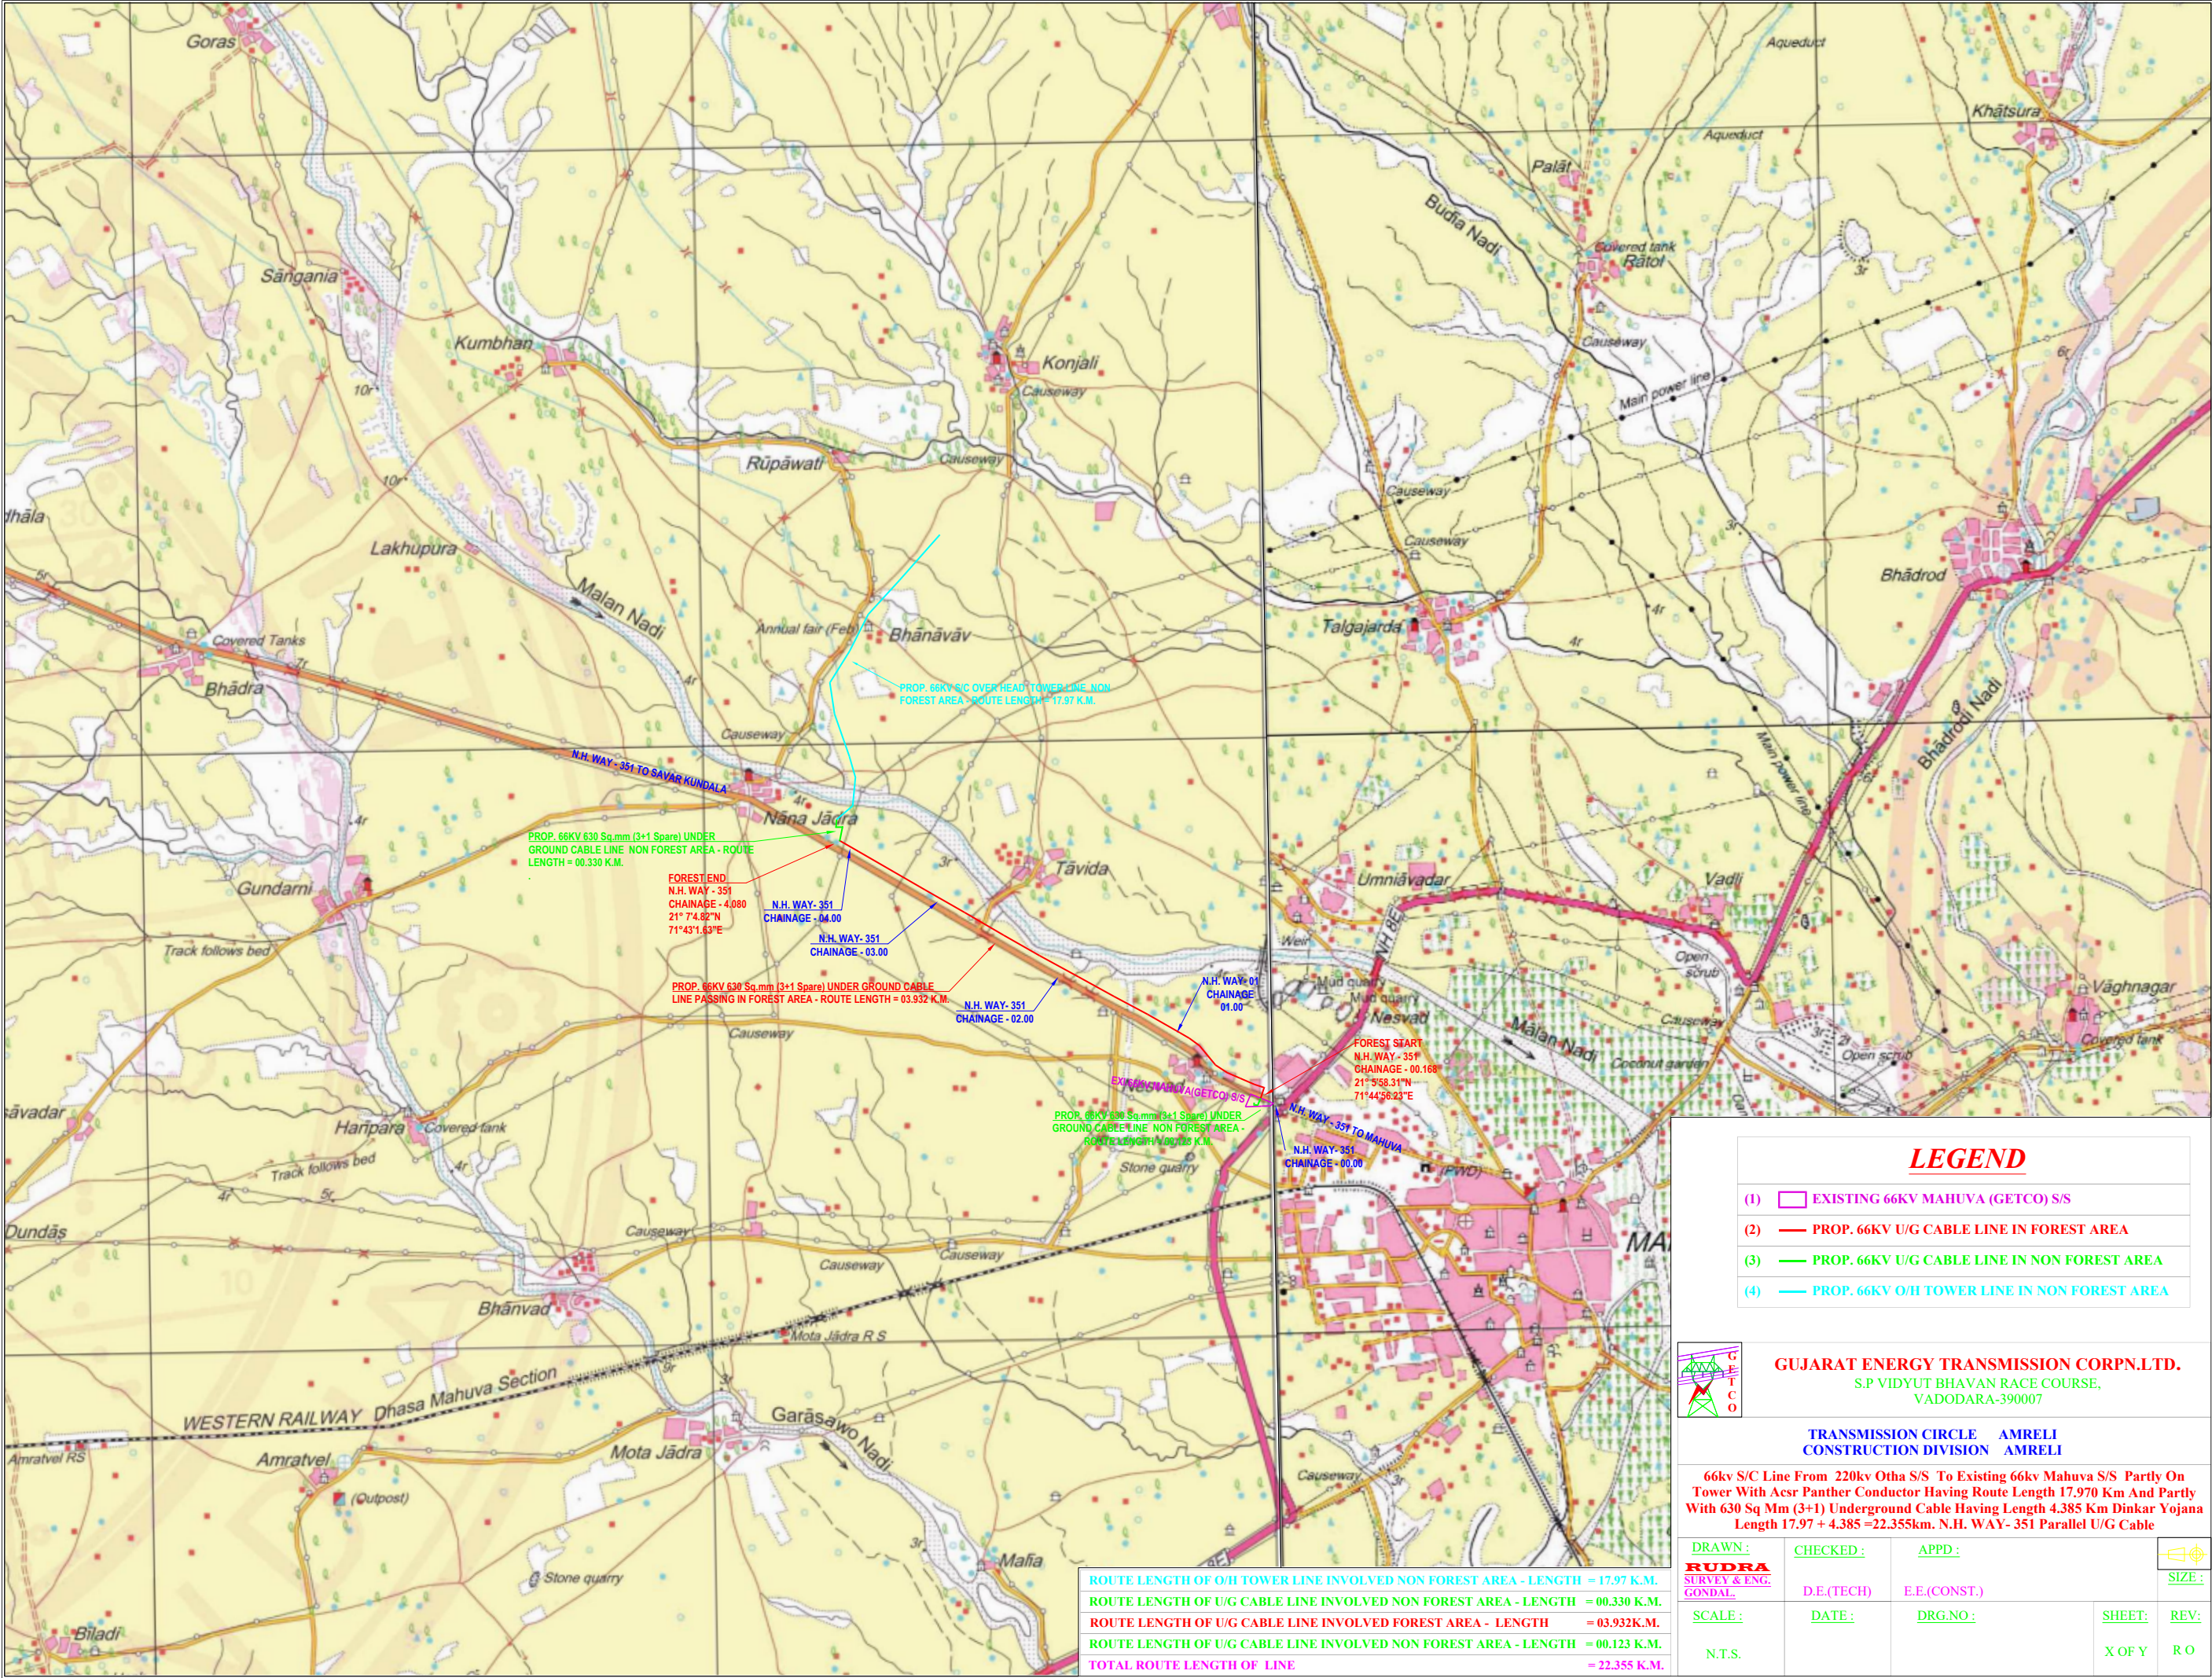

GUJARAT ENERGY TRANSMISSION CORPN.LTD.
S.P VIDYUT BHAVAN RACE COURSE,
VADODARA-390007

TRANSMISSION CIRCLE AMRELI
CONSTRUCTION DIVISION AMRELI

66kv S/C Line From 220kv Otha S/S To Existing 66kv Mahuva S/S Partly On Tower With Acsr Panther Conductor Having Route Length 17.970 Km And Partly With 630 Sq Mm (3+1) Underground Cable Having Length 4.385 Km Dinkar Yojana Length 17.97 + 4.385 =22.355km. N.H. WAY- 351 Parallel U/G Cable

DRAWN :	CHECKED :	APPD :	SIZE :
RUDRA SURVEY & ENG. GONDAL	D.E.(TECH)	E.E.(CONST.)	
SCALE :	DATE :	DRG.NO.:	SHEET: REV:
N.T.S.			X OF Y R O

ROUTE LENGTH OF O/H TOWER LINE INVOLVED NON FOREST AREA - LENGTH = 17.97 K.M.
ROUTE LENGTH OF U/G CABLE LINE INVOLVED NON FOREST AREA - LENGTH = 00.330 K.M.
ROUTE LENGTH OF U/G CABLE LINE INVOLVED FOREST AREA - LENGTH = 03.932K.M.
ROUTE LENGTH OF U/G CABLE LINE INVOLVED NON FOREST AREA - LENGTH = 00.123 K.M.
TOTAL ROUTE LENGTH OF LINE = 22.355 K.M.