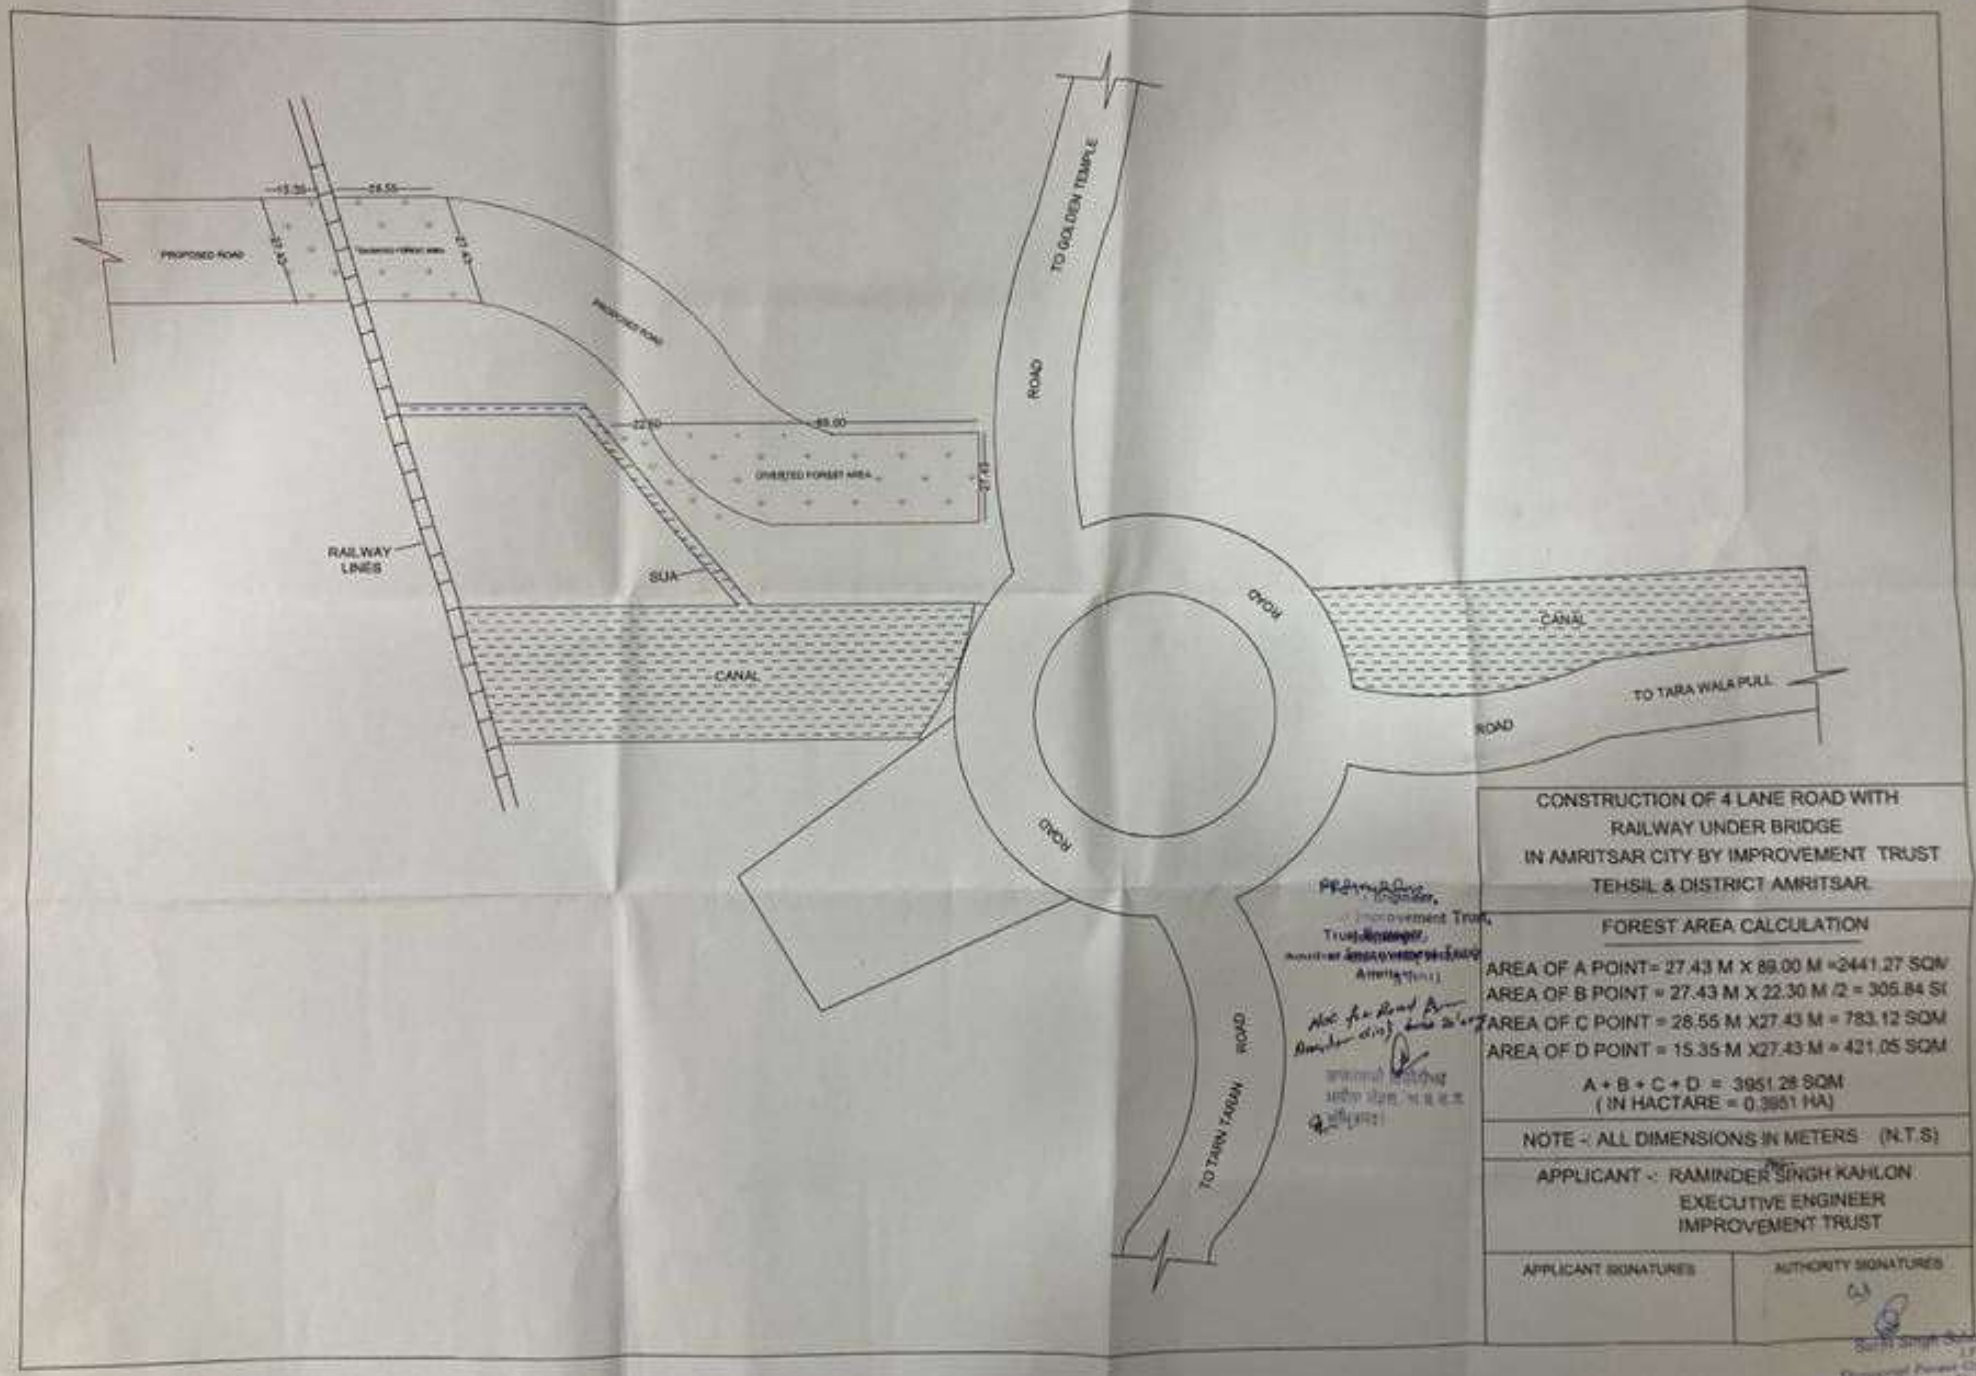
PROPOSED ROAD
15.35
28.55
27.43
PROPOSED ROAD
22.30
89.00
DIVERTED FOREST AREA
27.43
RAILWAY LINES
SUA
CANAL
TO GOLDEN TEMPLE
ROAD
CROW
CANAL
TO TARA WALA PULL
ROAD
CROW
TO TARN TARAN
ROAD
CONSTRUCTION OF 4 LANE ROAD WITH
RAILWAY UNDER BRIDGE
IN AMRITSAR CITY BY IMPROVEMENT TRUST
TEHSIL & DISTRICT AMRITSAR
FOREST AREA CALCULATION
AREA OF A POINT= 27.43 M X 89.00 M =2441.27 SQM
AREA OF B POINT = 27.43 M X 22.30 M /2 = 305.84 SQ
AREA OF C POINT = 28.55 M X27.43 M = 783.12 SQM
AREA OF D POINT = 15.35 M X27.43 M = 421.05 SQM
A + B + C + D = 3951.28 SQM
(IN HACTARE = 0.3951 HA)
NOTE :- ALL DIMENSIONS IN METERS (N.T.S)
APPLICANT :- RAMINDER SINGH KAHLON
EXECUTIVE ENGINEER
IMPROVEMENT TRUST
APPLICANT SIGNATURES
AUTHORITY SIGNATURES