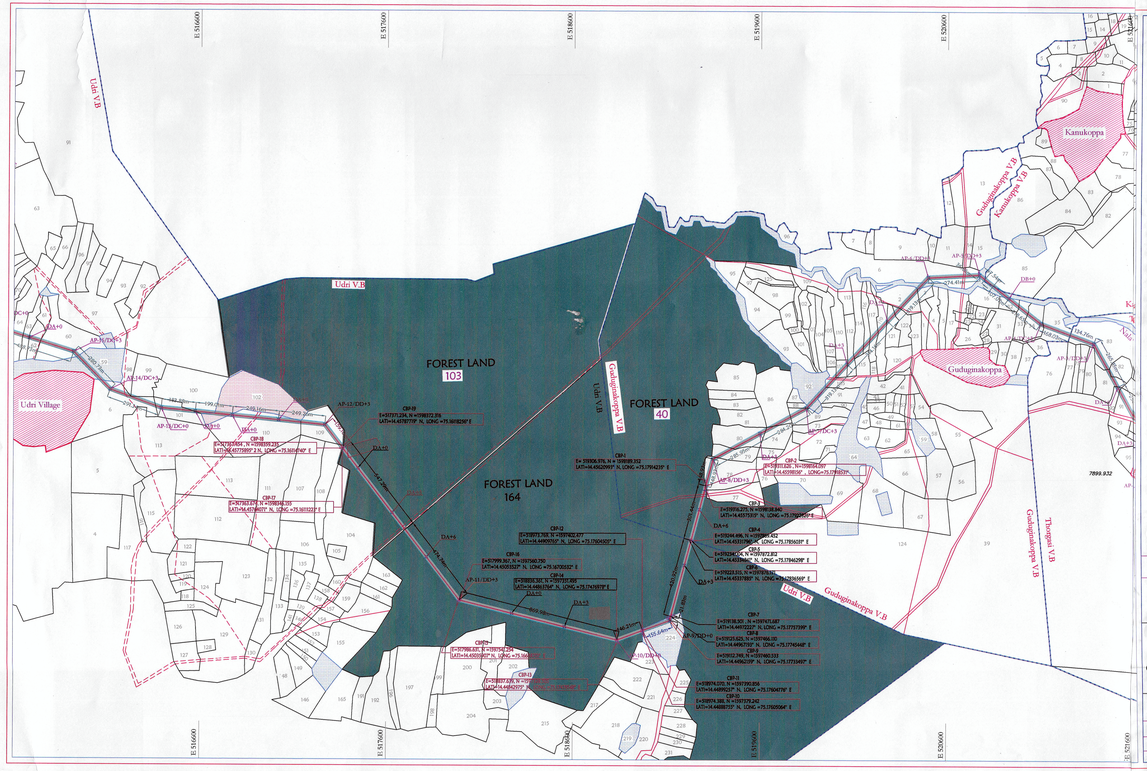

LEGEND

Survey No. Boundary	
Survey Nos.	130
Road	
Cart Track	
Footpath	
Tank	
Streams	
Nala	
Village Boundary	
Route Line	
Proposed Towers	
110KV line corridor = 22 Mts	

NOTE:-
1) ALL DIMENSIONS AND LEVELS ARE IN METRES.

CLIENT	M/s Karnataka Power Transmission Corporation Limited
TITLE	Name Of Projects: Forest Proposal For The Construction Of The Proposed 110kv Sc Line On Dc Towers From the Existing 110/11kV Thogarsi Sub -Station to the Proposed 110/11KV Sub-Station at Kuppagudde in Soraba Taluk, Shivamogga District.
SURVEY CONSULTANTS	KARNATAKA SURVEYORS ENGINEERS & CONTRACTORS Off: #27, Gundanna Compound, K.R. Sindhe Road, V.V. Puram, Bangalore - 560004. Mobile: 9845145892 7899258380 Ph.Fax: 08046300084. E-mail : karnatakasurveys@rediffmail.com/gmail.com
	Sheet No :01
	Surveyed BY
SEASON OCT 2018	5M 0 5 10 15 20 25M
ACTUAL SCALE 1 : 1000	
PRINT SCALE 1 : 10000	5M 0 5 10 15 20 25M
DRAWN	DRAWING No. REV

KARNATAKA POWER TRANSMISSION CORPORATION LIMITED

FOREST PROPOSAL

FOREST PROPOSAL FOR THE CONSTRUCTION OF THE PROPOSED 110KV S/C LINE ON D/C TOWERS FROM THE EXISTING 110/11KV THOGARSI SUB - STATION TO THE PROPOSED 110/11KV SUB - STATION AT KUPPAGUDDE. IN SORABA TALUK, SHIVAMOGGA DISTRICT.

INDEX

Forest Land Survey No.40,164,103. at Gudugnakoppa and Udri Village Uddari Brancha, Uddari Beat. Shiralkoppa Range. In Soraba Taluk. Shivamogga district.

SL NO	SECTION	LENGTH IN Mtrs	WIDTH IN Mtrs	AREA IN Sq Mtrs	FOREST SURVEY Nos	VILLAGE LIMITS	Datum WGS-84 UTM		Datum WGS-84 Decimal Degrees		STATION CODE
							Easting	Northing	LONGITUDE	LATITUDE	
							519350	1598308	75.1795400°	14.457278°	AP-8
							519306.976	1598189.352	75.17914235°	14.456209993°	Forest Start Reight side 11M Boundry, CPB-1
							519311.626	1598164.097	75.17918531°	14.45598156°	Forest Start Centre Point , CBP-2
							519316.275	1598138.84	75.17922826°	14.45575315°	Forest Start Left side 11M Boundry, CBP-3
1		301.44	22	6631.68	40	Gudugnakoppa					Forest
							519244.496	1597869.452	75.17856031°	14.45331796°	Forest end Left side 11M Boundry, CBP-4
							519234.004	1597872.812	75.17846298°	14.45334841°	Forest end Centre Point , CBP-5
							519223.515	1597876.171	75.17836569°	14.45337885°	Forest end Reight side 11M Boundry, CPB-6
							519244.496	1597869.452	75.17856031°	14.45331796°	Forest Start Left side 11M Boundry, CBP-4
							519234.004	1597872.812	75.17846298°	14.45334841°	Forest Start Centre Point , CBP-5
							519223.515	1597876.171	75.17836569°	14.45337885°	Forest Start Reight side 11M Boundry, CPB-6
2		420.92	22	9260.24	164	Uddari					Forest
							519138.501	1597471.687	75.17757399°	14.44972227°	Forest end Left side 11M Boundry, CBP-7
							519125.625	1597466.11	75.17745448°	14.44967193°	Forest end Centre Point , CBP-8
							519112.749	1597460.533	75.17733497°	14.44962159°	Forest end Reight side 11M Boundry, CPB-9
							518974.388	1597379.242	75.17605064°	14.44888755°	Forest Start Left side 11M Boundry, CBP-10
							518974.07	1597390.856	75.17604776°	14.44899257°	Forest Start Centre Point , CBP-11
							518973.769	1597402.477	75.17604505°	14.44909765°	Forest Start Reight side 11M Boundry, CPB-12
3		146.21	22	3216.62	164	Uddari					Forest
							518837.639	1597328.505	75.17478148°	14.44842975°	Forest end Left side 11M Boundry, CBP-13
							518837	1597340	75.17477°	14.448530°	AP-10
							518836.361	1597315.495	75.17476978°	14.44863764°	Forest end Reight side 11M Boundry, CPB-14
							518837.639	1597328.505	75.17478148°	14.44842975°	Forest Start Left side 11M Boundry, CBP-13
							518837	1597340	75.17477°	14.448530°	AP-10
							518836.361	1597315.495	75.17476978°	14.44863764°	Forest Start Reight side 11M Boundry, CPB-14
4		869.98	22	19139.56	164	Uddari					Forest
							517986.631	1597541.254	75.16688701°	14.45035907°	Forest end Left side 11M Boundry, CBP-15
							517993	1597551	75.166944°	14.450438°	AP-11
							517999.367	1597560.75	75.16700532°	14.45053527°	Forest end Reight side 11M Boundry, CPB-16
							517993	1597551	75.166944°	14.450438°	Forest Start Left side 11M Boundry, CBP-15
							517999.367	1597560.75	75.16700532°	14.45053527°	Forest Start Reight side 11M Boundry, CPB-16
5		474.74	22	10444.28	164	Uddari					Forest
6		547.29	22	12040.38	103	Uddari					Forest
							517363.674	1598346.155	75.16111223°	14.45764071°	Forest end Left side 11M Boundry, CBP-17
							517367.454	1598359.235	75.16114740°	14.45775895°	Forest end Centre Point , CBP-18
							517371.234	1598372.316	75.16118256°	14.45787719°	Forest end Reight side 11M Boundry, CPB-19
	Total	2760.58M		6073276M²							
			Total	6.073276 Hectares							

For Karnataka Surveyors, Bangaluru

Assistant Engineer Ele.,
Major Works Sub - Division
KPTCL, Shivamogga

Assistant Executive Engineer Ele.,
Major Works Sub - Division
KPTCL, Shivamogga

Executive Engineer Ele.,
Major Works Division
KPTCL, Shivamogga

Superintending Engineer Ele.,
Transmission (W & M) Circle
KPTCL, Shivamogga