REVISED PROPOSAL FOR DIVERSION OF 48.987 HA. FOREST LAND FOR CONSTRUCTION OF 132 KV D/C BISHWANATH CHARIALI TO ITANAGAR TRANSMISSION LINE:- 3 ALTERNATIVE ROUTES OF THE FOREST AREA TO BE RE-ROUTED

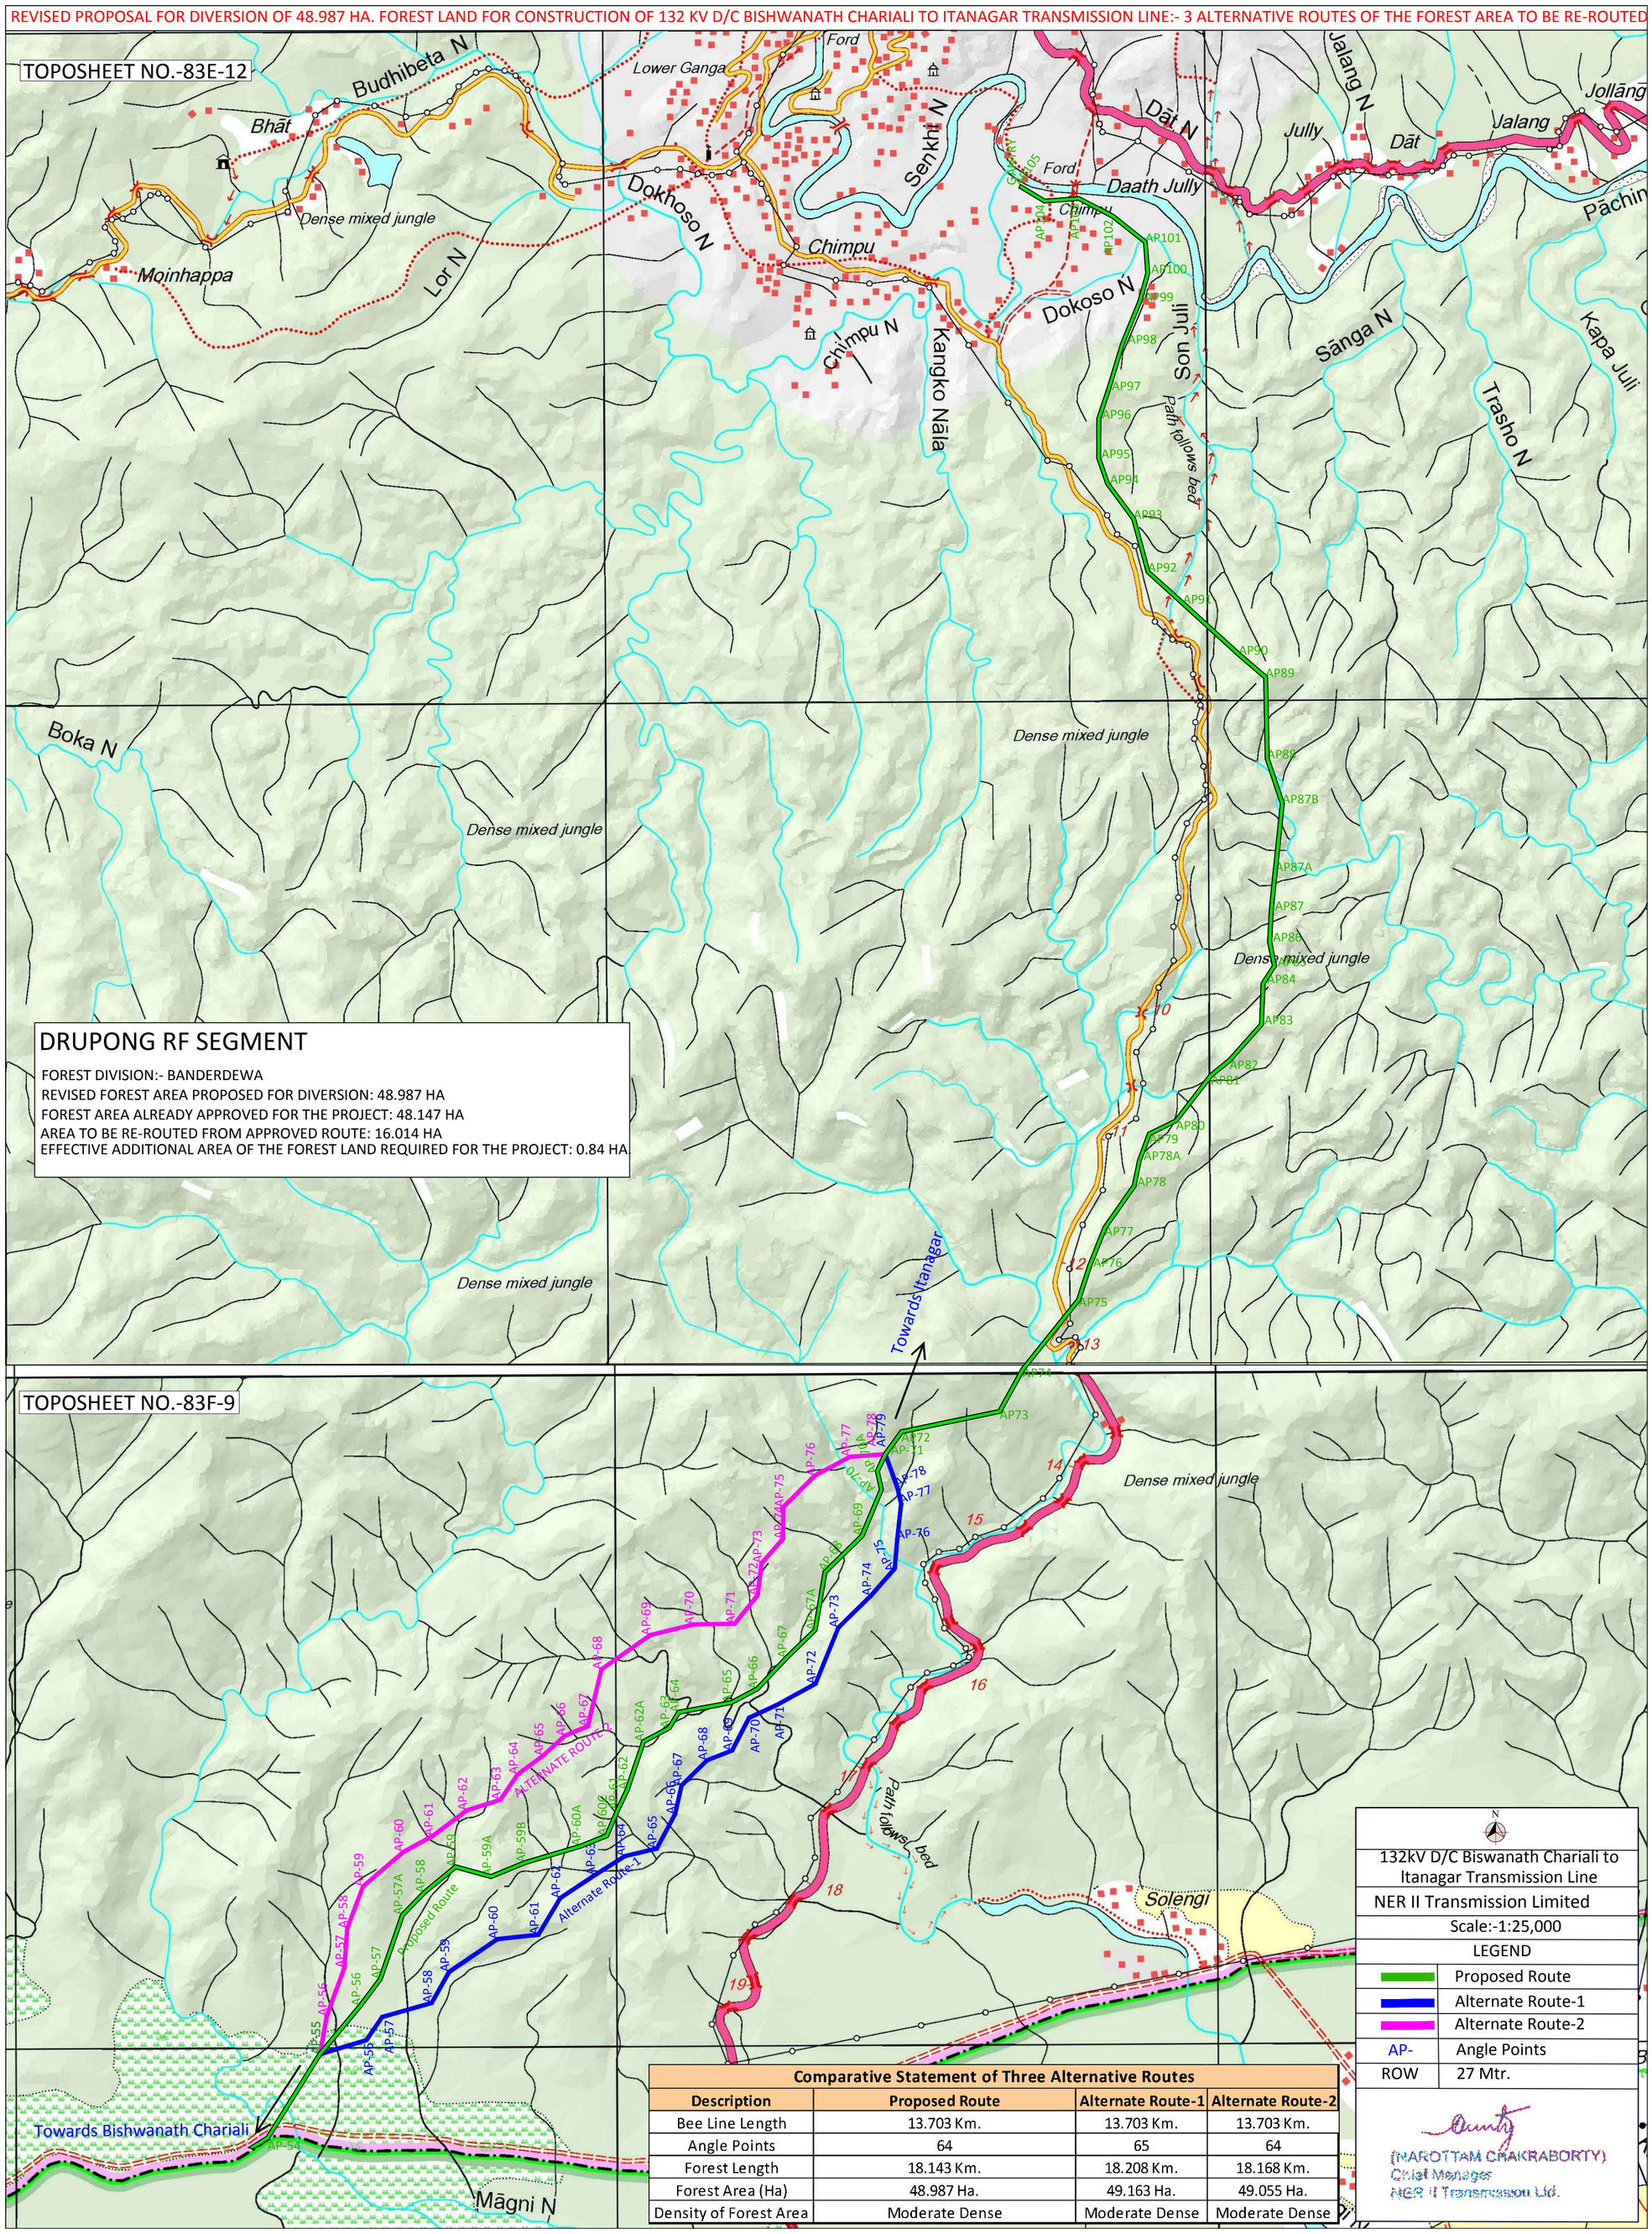

Comparative Statement of Three Alternative Routes

Description	Proposed Route	Alternate Route-1	Alternate Route-2
Bee Line Length	13.703 Km.	13.703 Km.	13.703 Km.
Angle Points	64	65	64
Forest Length	18.143 Km.	18.208 Km.	18.168 Km.
Forest Area (Ha)	48.987 Ha.	49.163 Ha.	49.055 Ha.
Density of Forest Area	Moderate Dense	Moderate Dense	Moderate Dense