3 Alternative Routes of 132 kv Garhwa-Japla Transmission Line

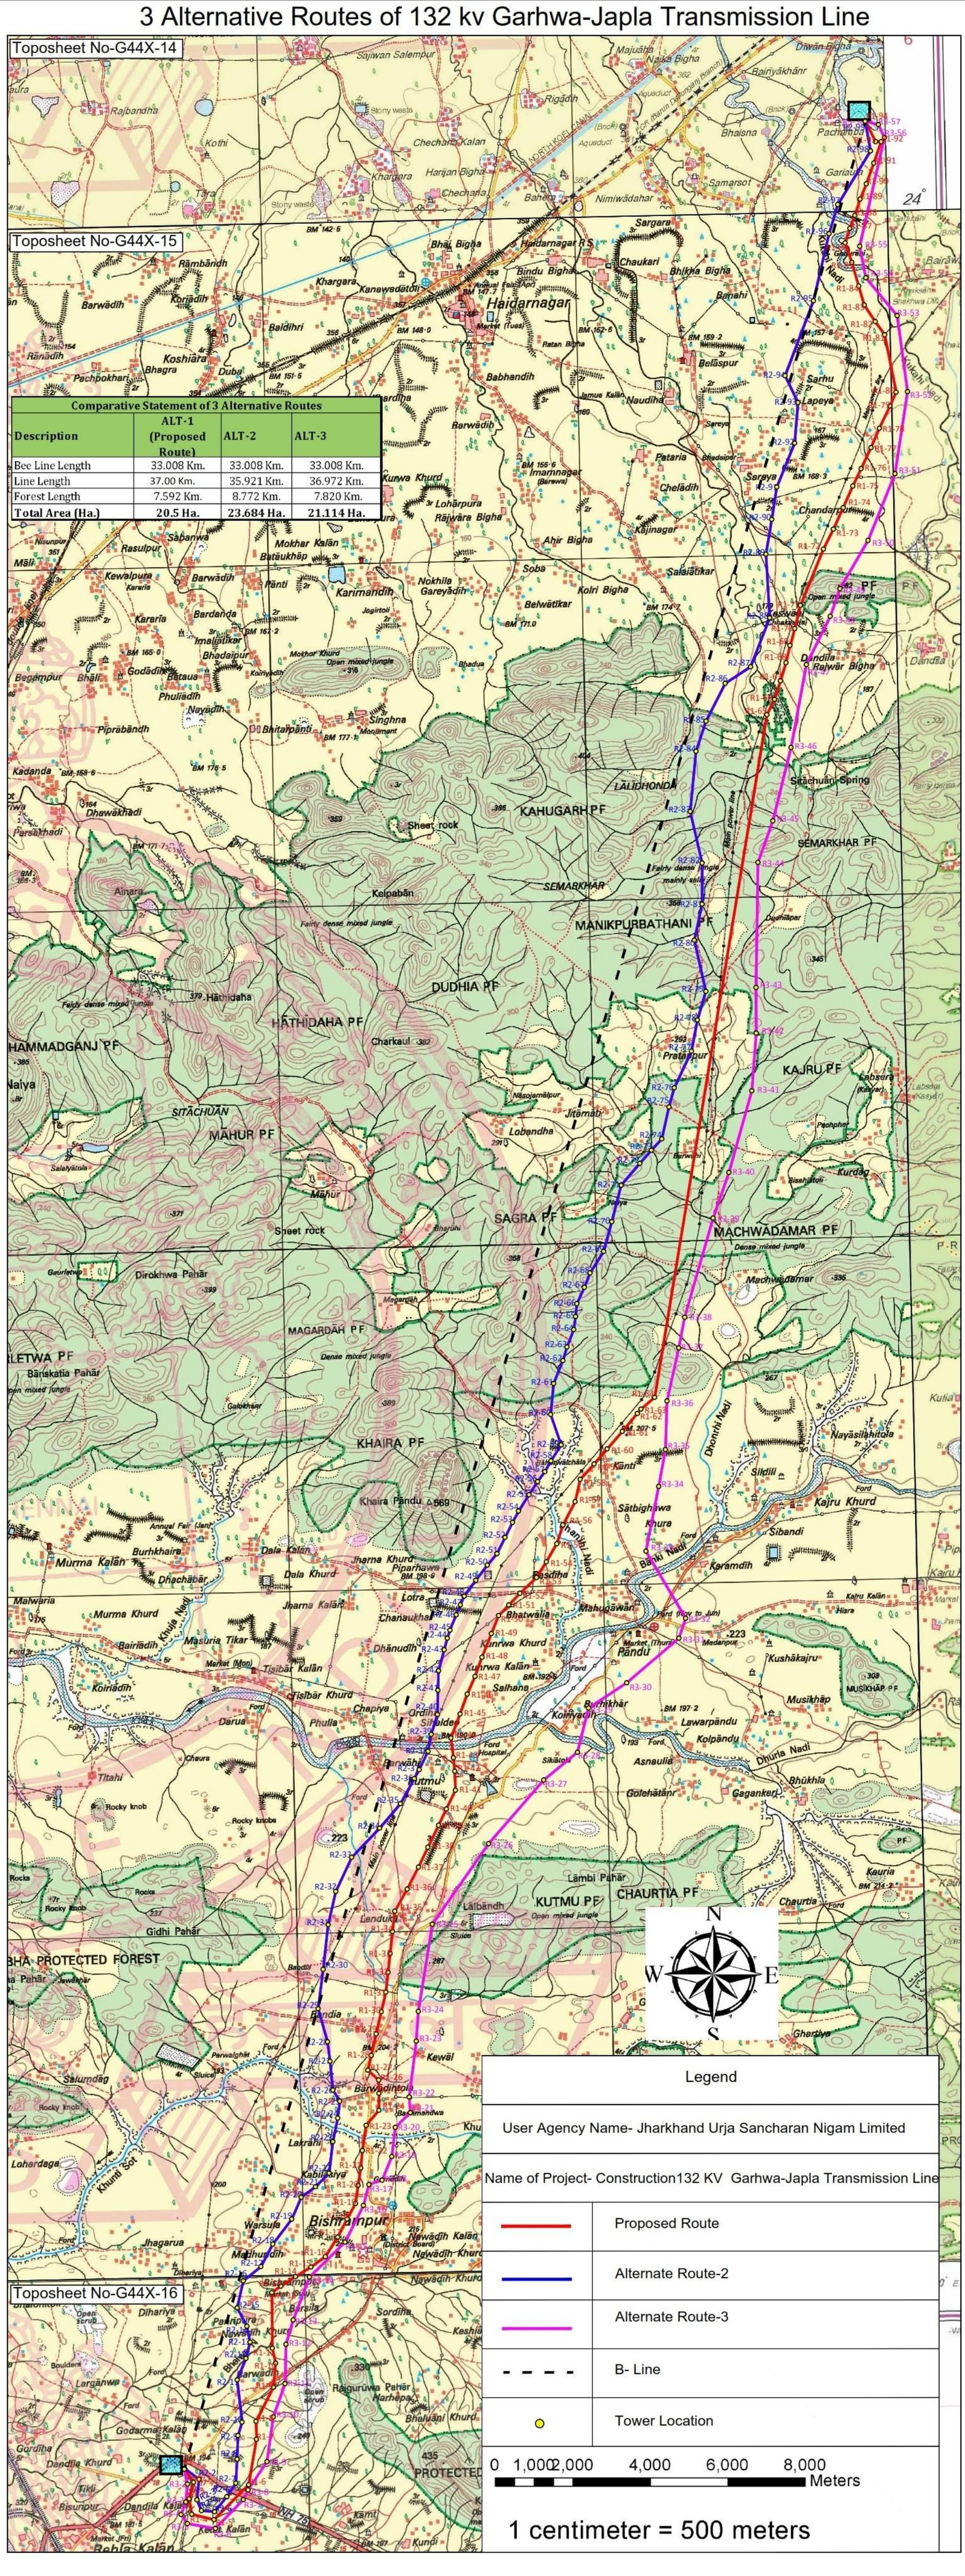

Comparative Statement of 3 Alternative Routes			
Description	**ALT-1 (Proposed Route)**	**ALT-2**	**ALT-3**
Bee Line Length	33.008 Km.	33.008 Km.	33.008 Km.
Line Length	37.00 Km.	35.921 Km.	36.972 Km.
Forest Length	7.592 Km.	8.772 Km.	7.820 Km.
Total Area (Ha.)	**20.5 Ha.**	**23.684 Ha.**	**21.114 Ha.**

Dy. G.M. - Transmission Project
Transmission Circle, Daltonganj
Jharkhand Urja Sancharan Nigam Ltd.